


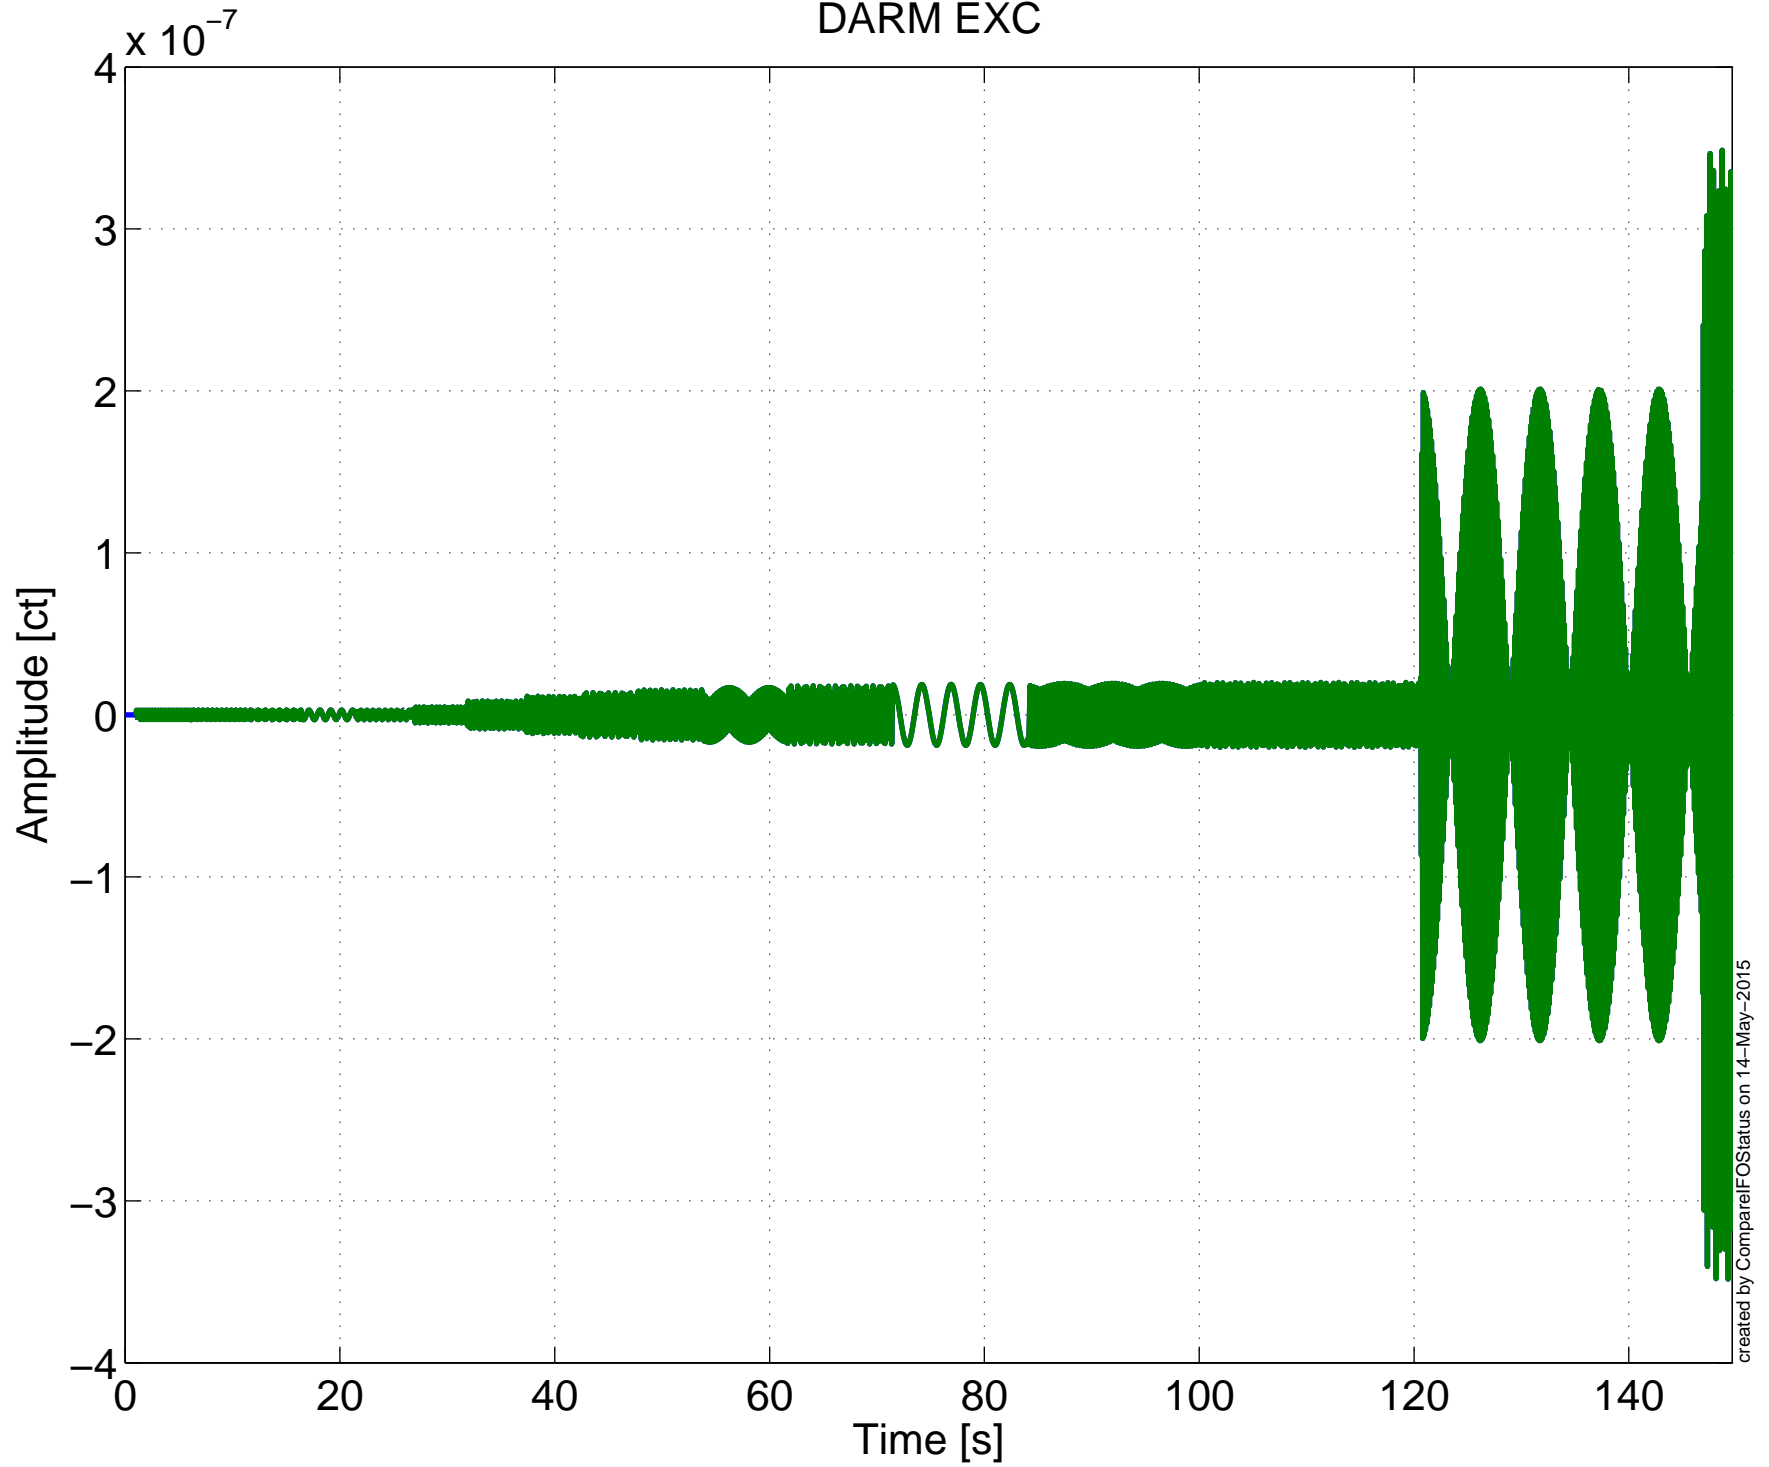
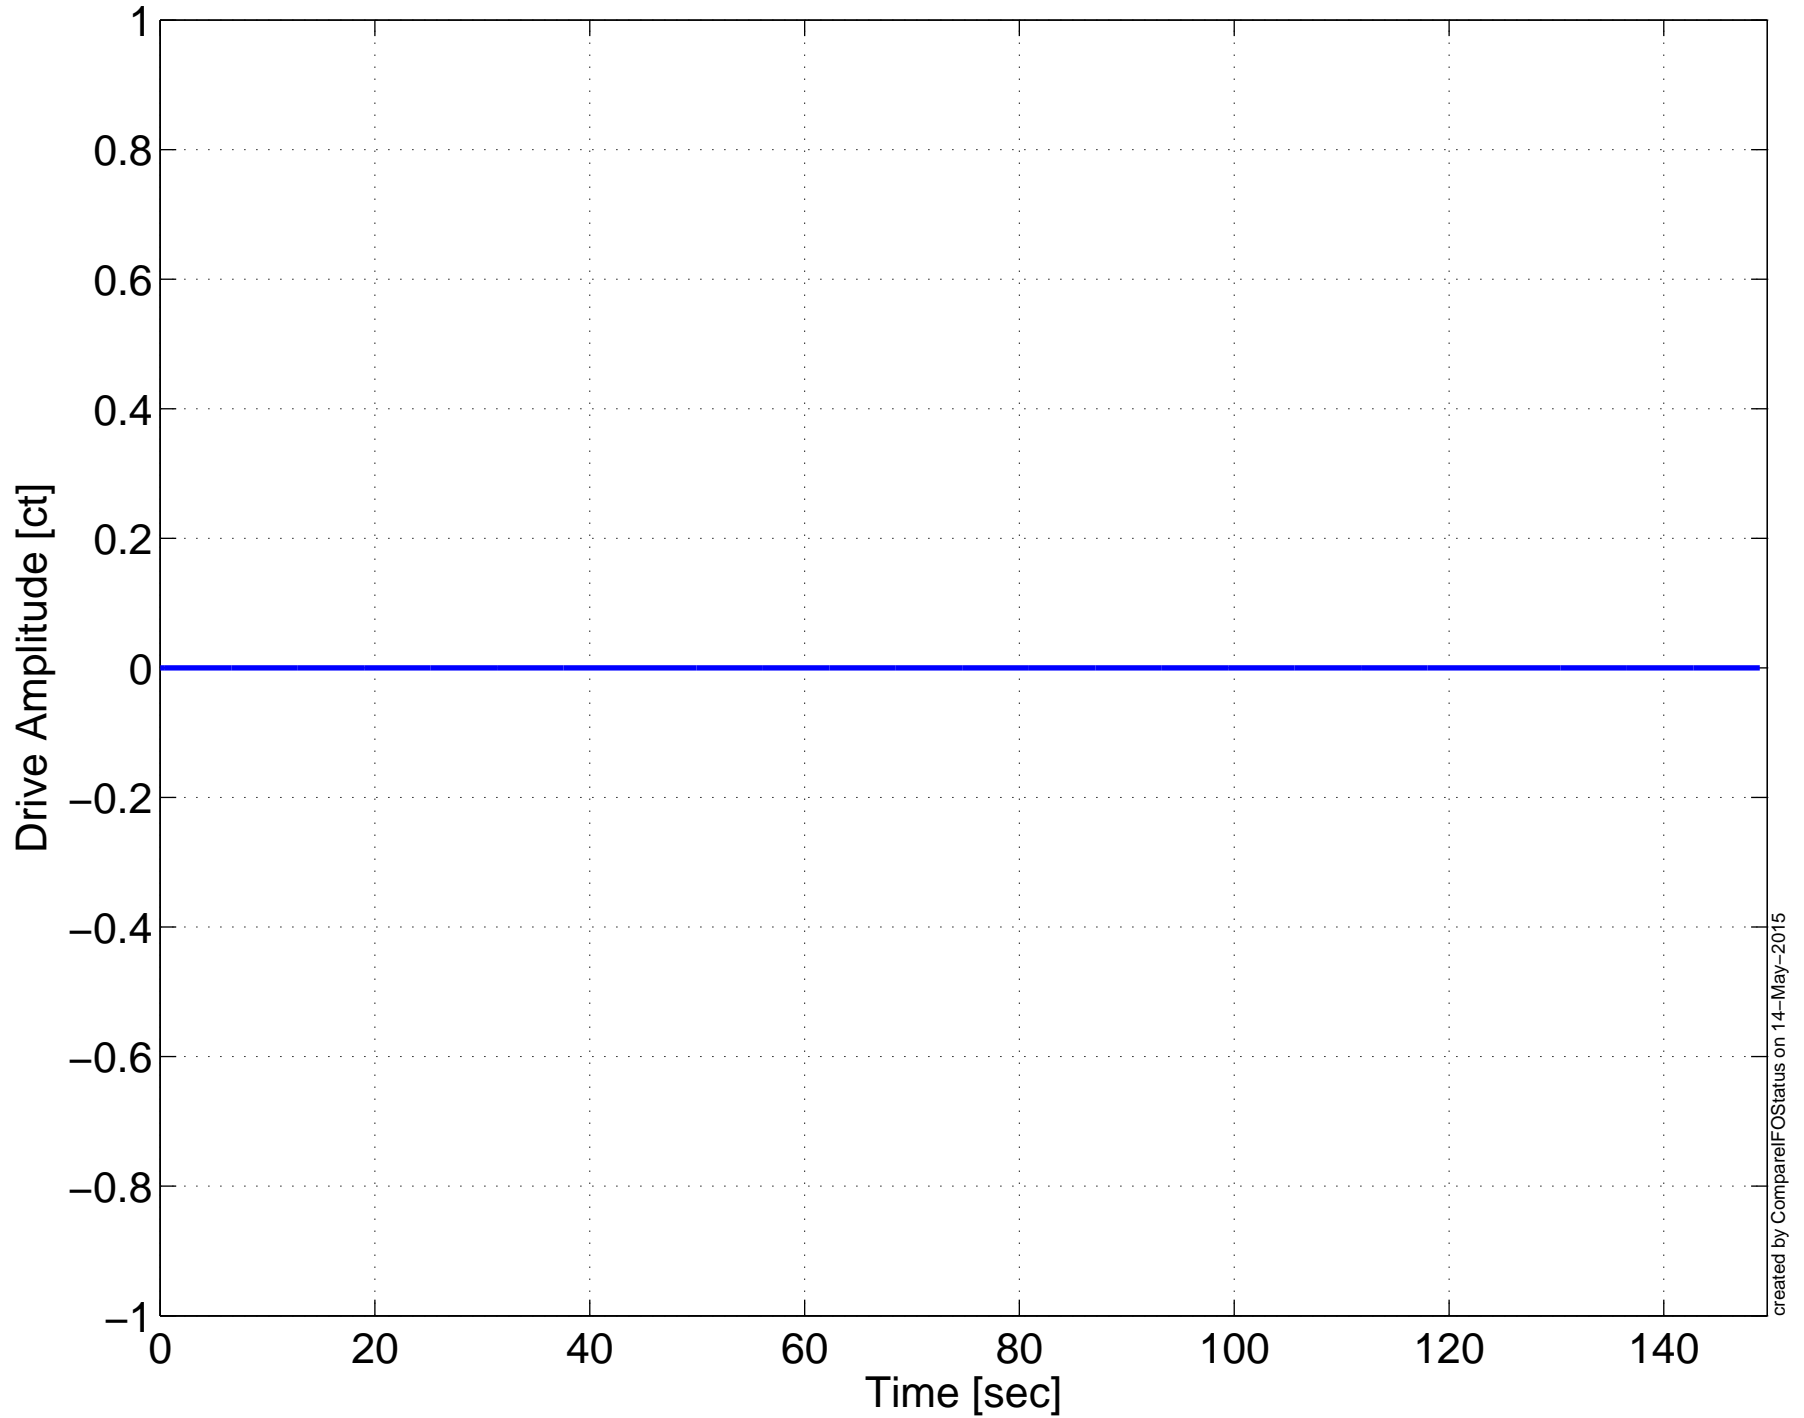
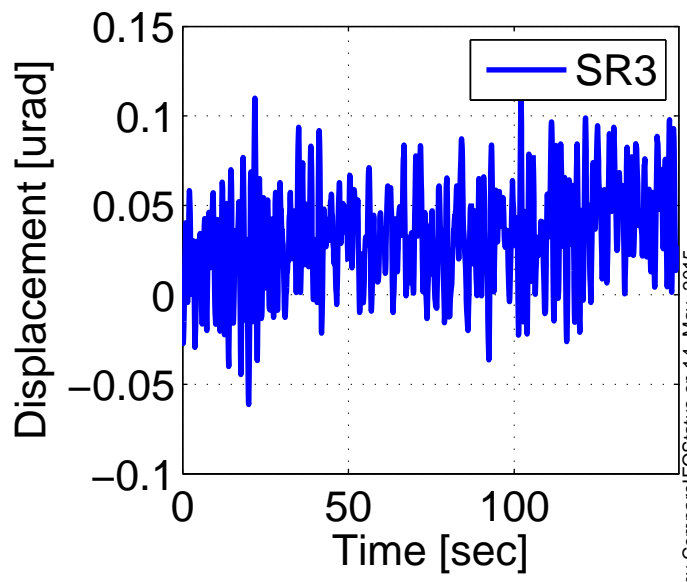
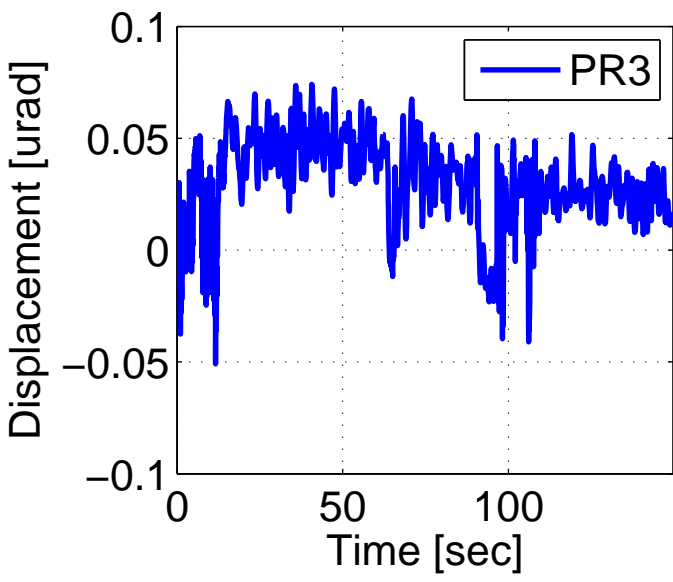
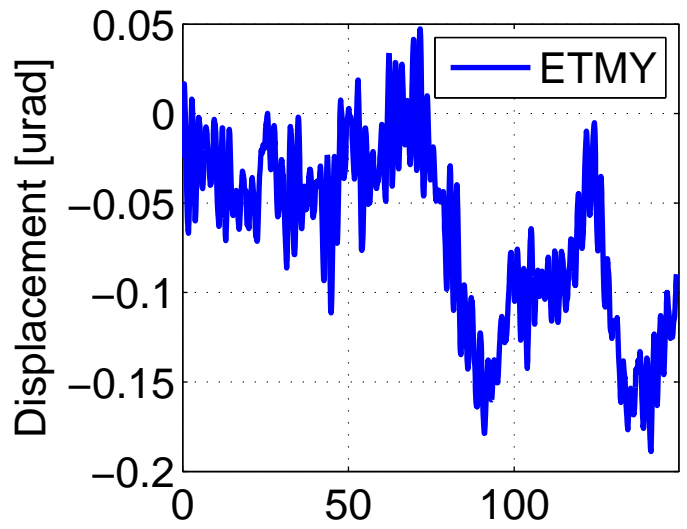


H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
DARM EXC

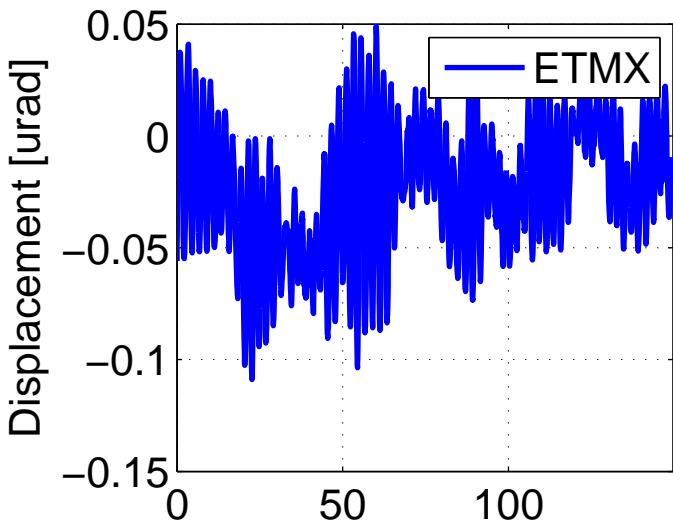








H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
Diff. SOFT (ITMX) Control Signal

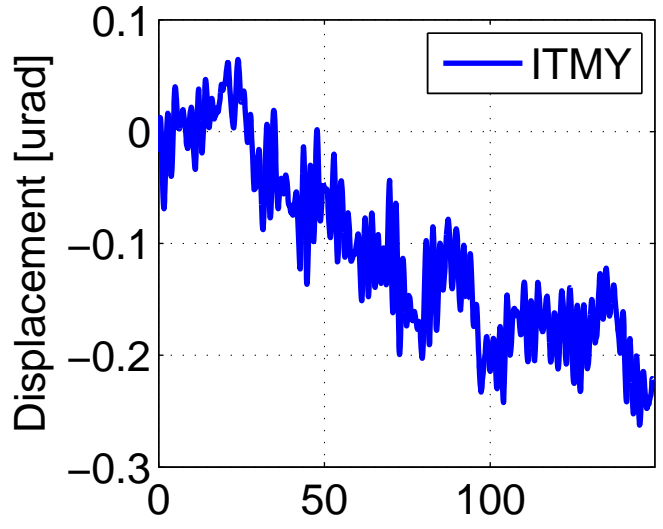

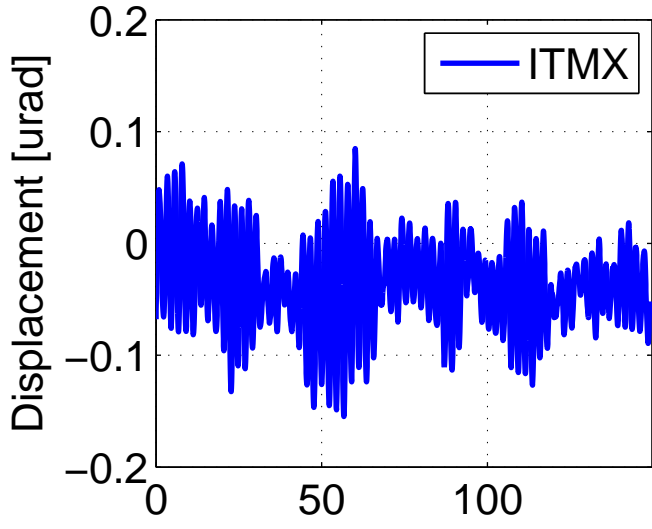


H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
Common SOFT (ITMY) Control Signal

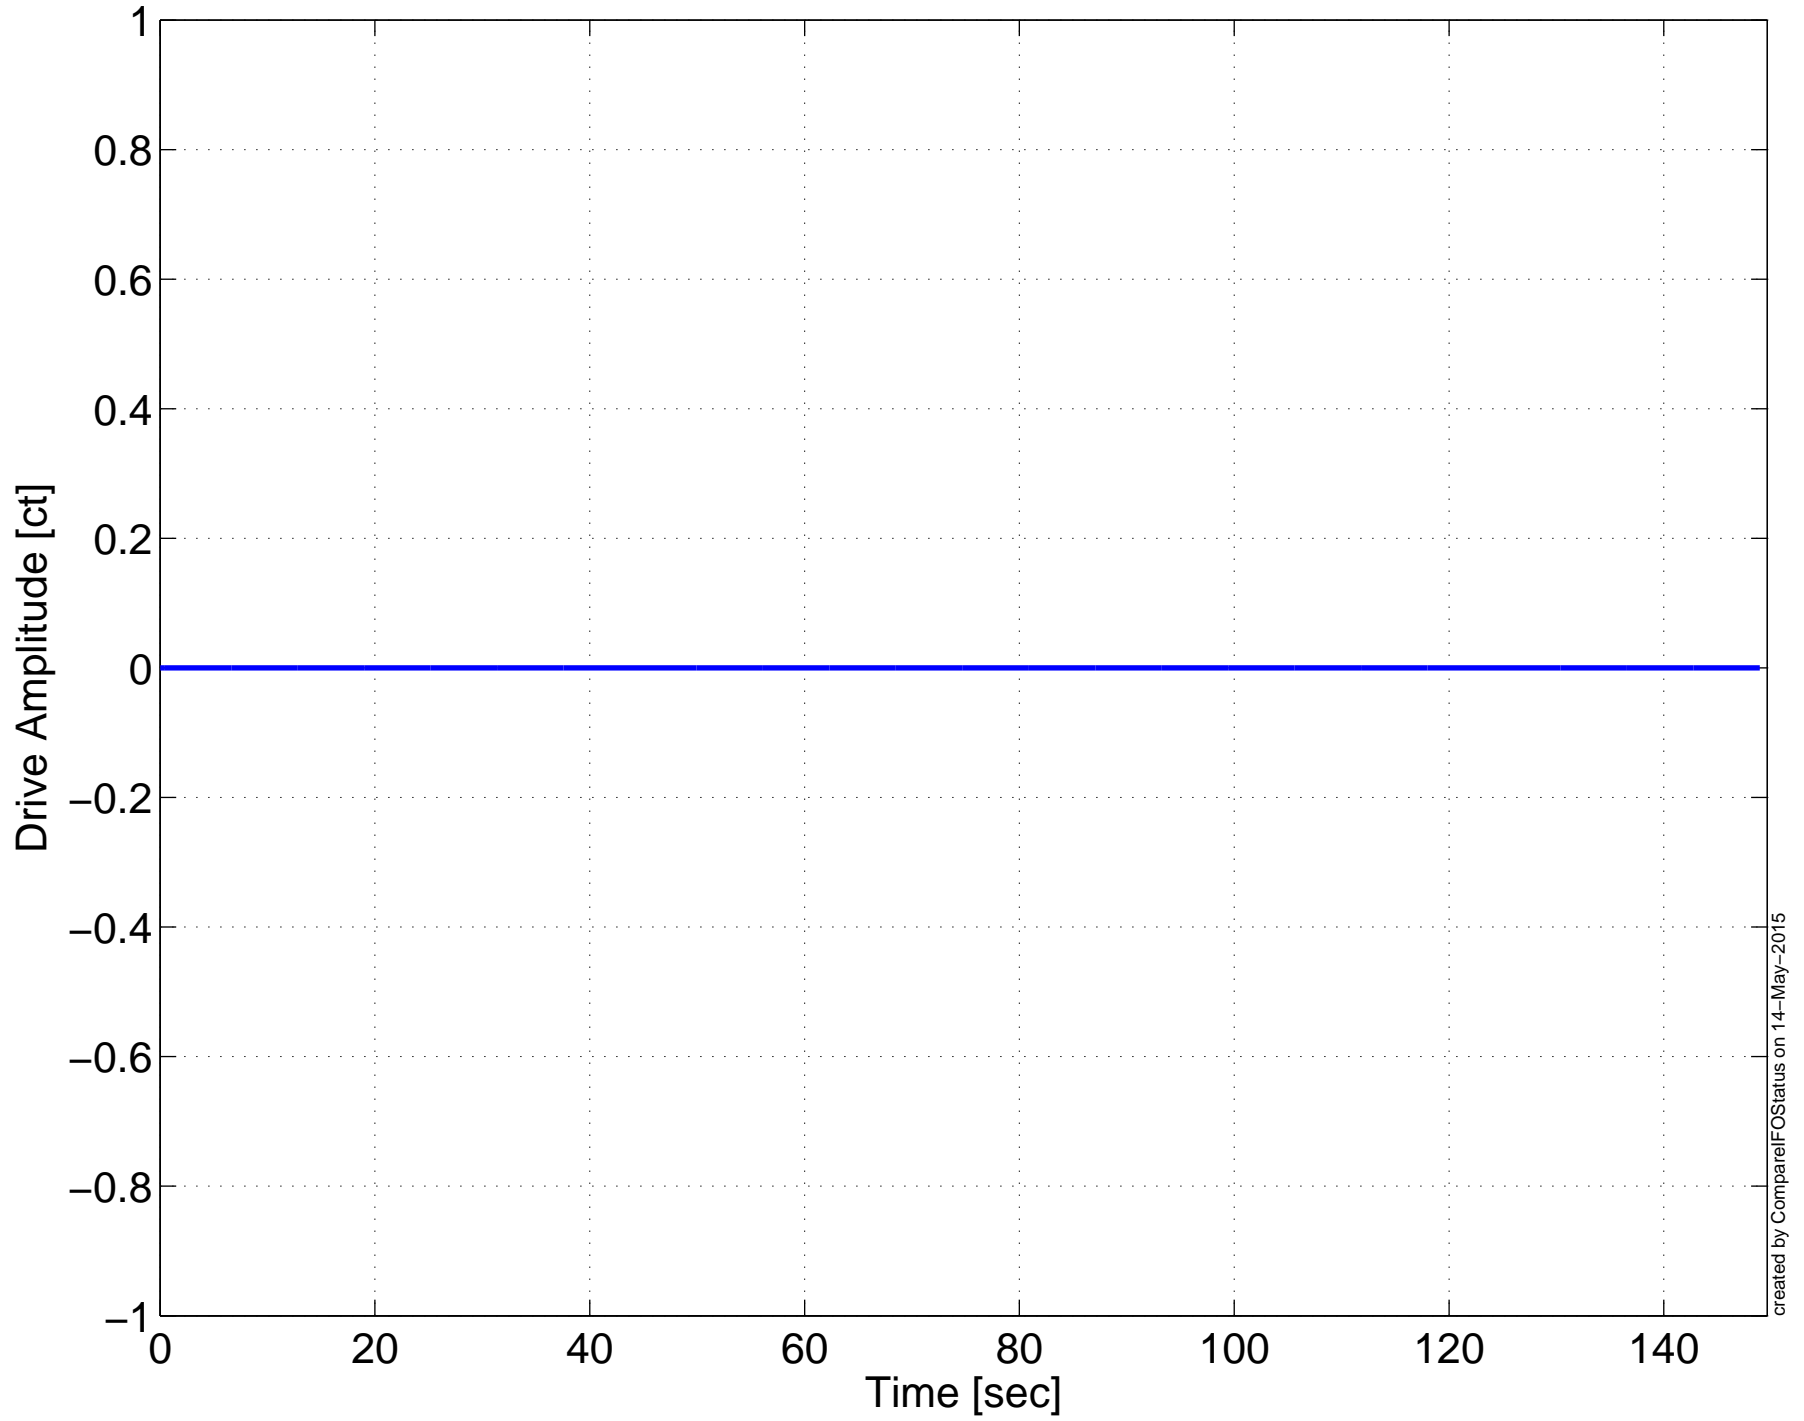


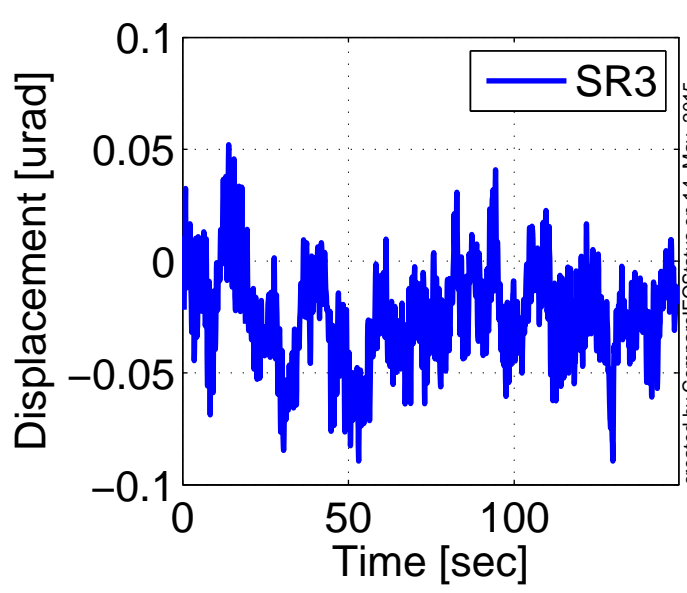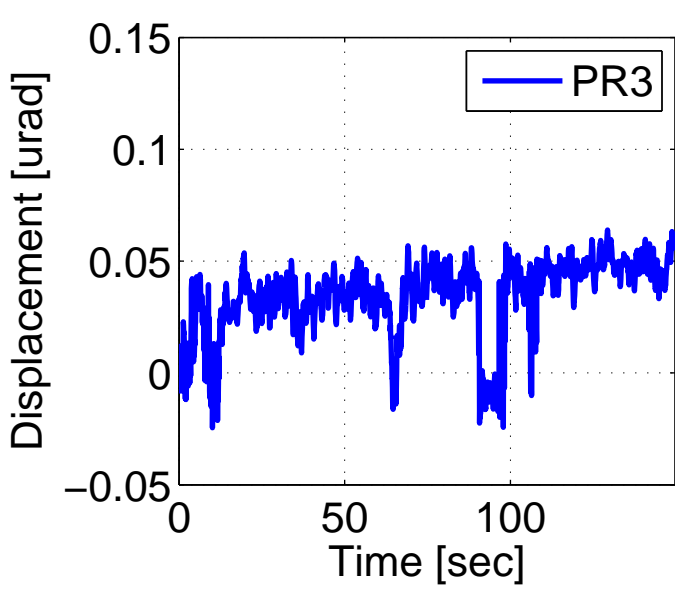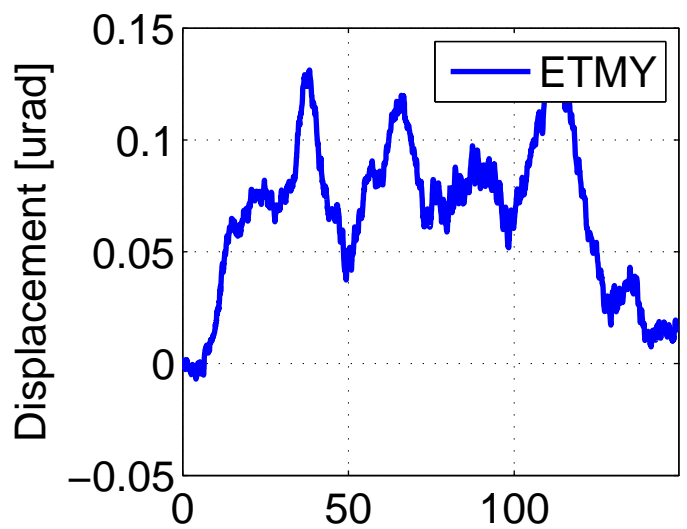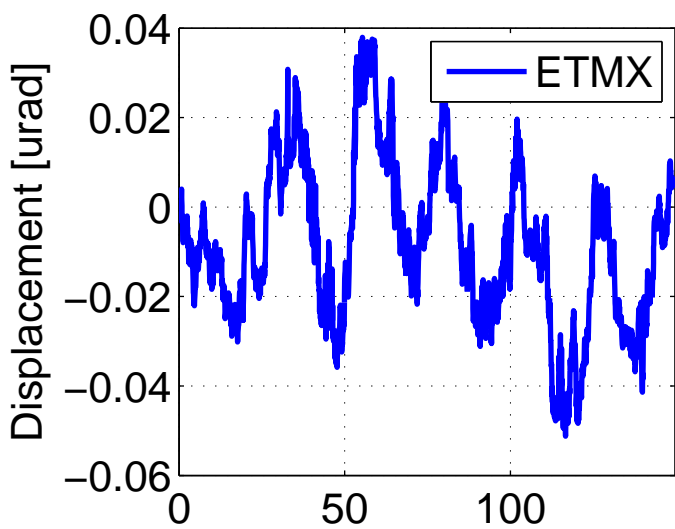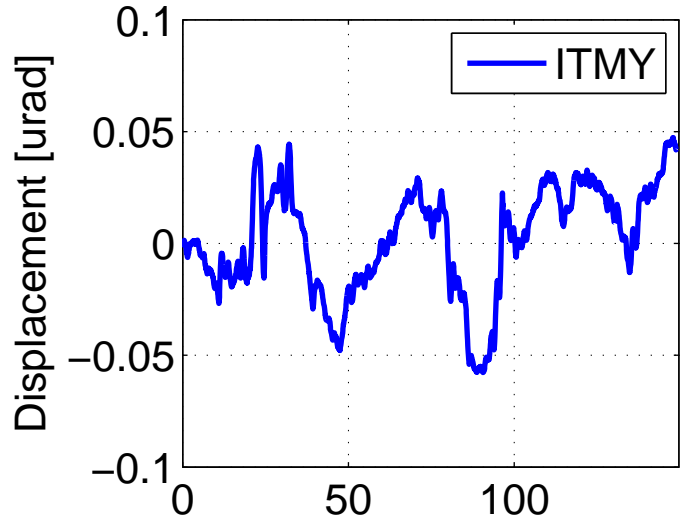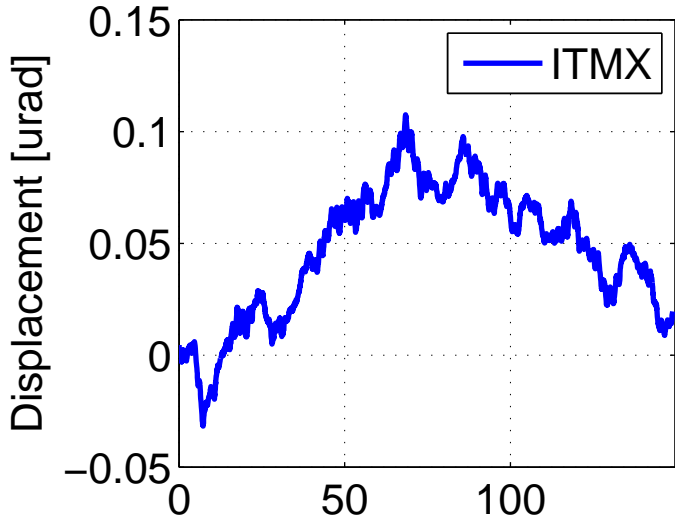

H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
TCS ITMX CO2 Laser Power

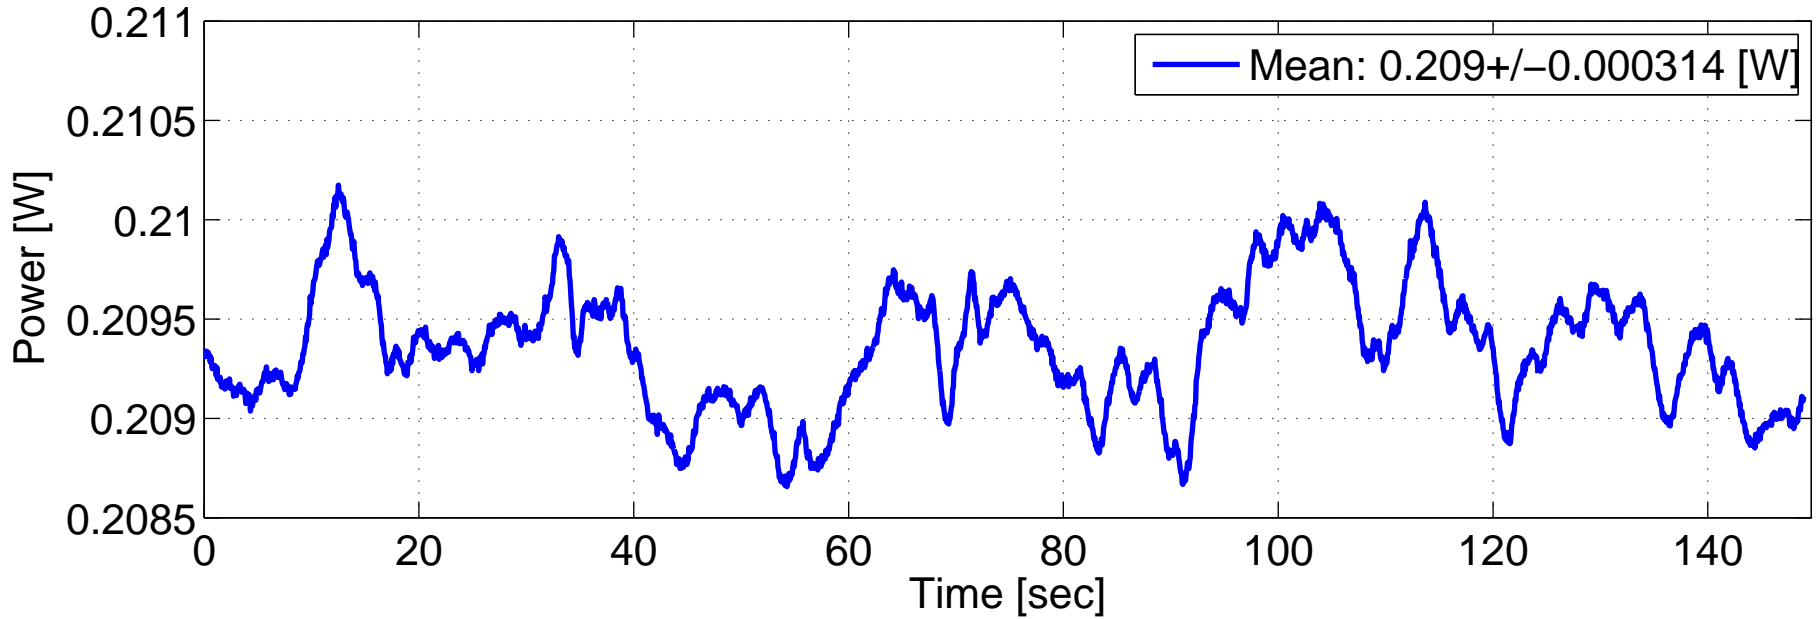


H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
TCS ETMX Ring Heater Power

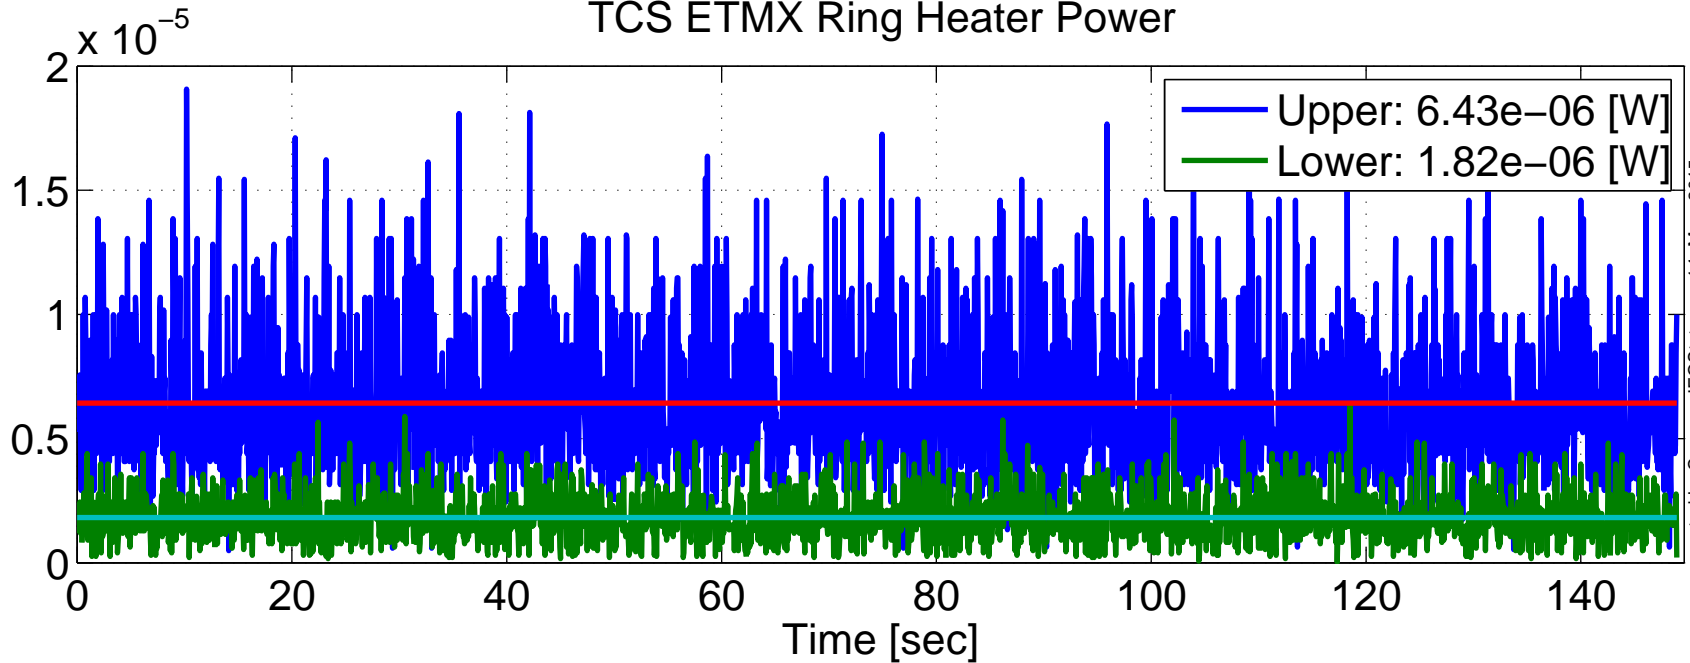


created by CompareFOSstatus on 14-May-2015


H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
Power Recycling Gain, Carrier

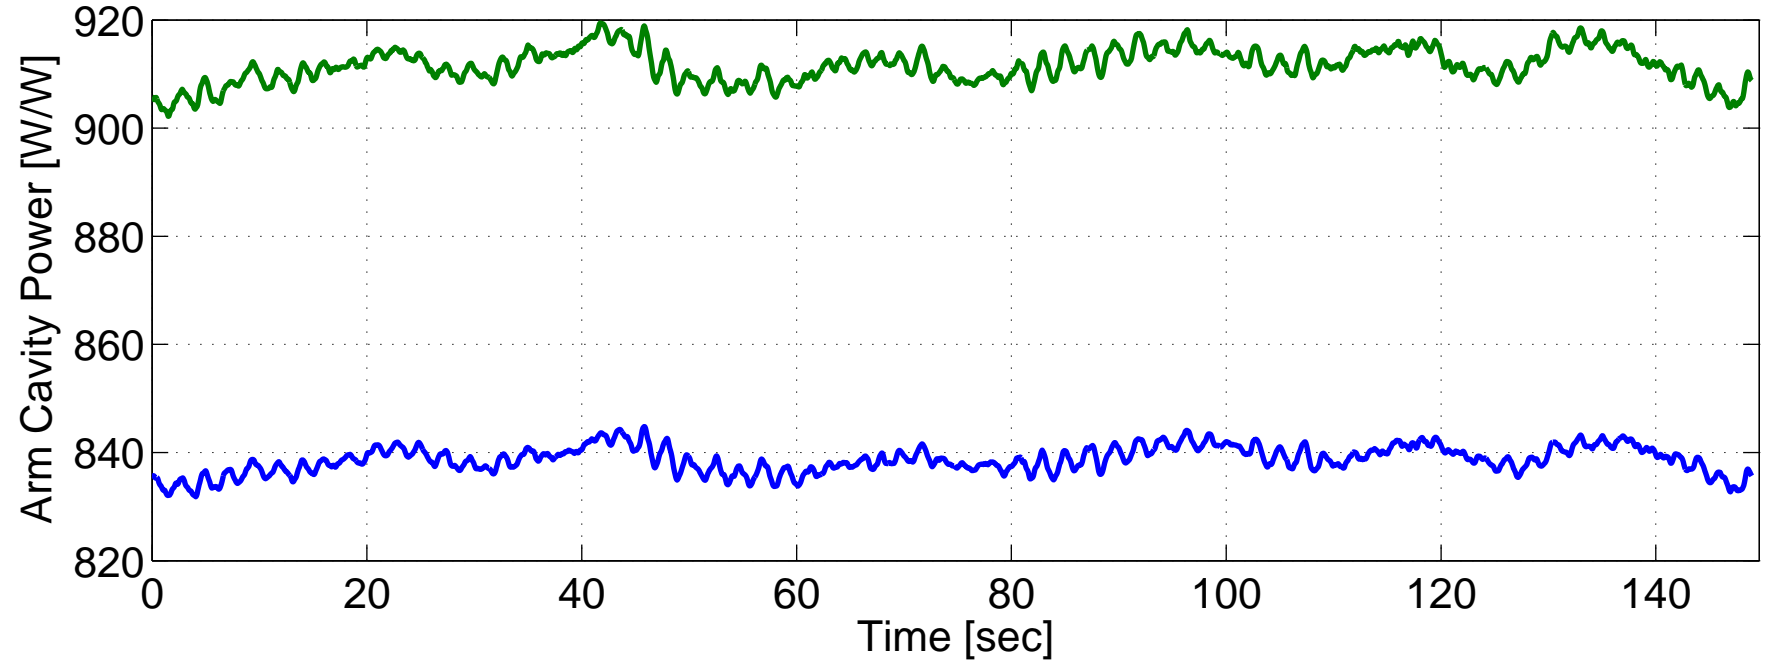


QPD Normalization Gains: [X,Y] = [0.21661,0.2187]

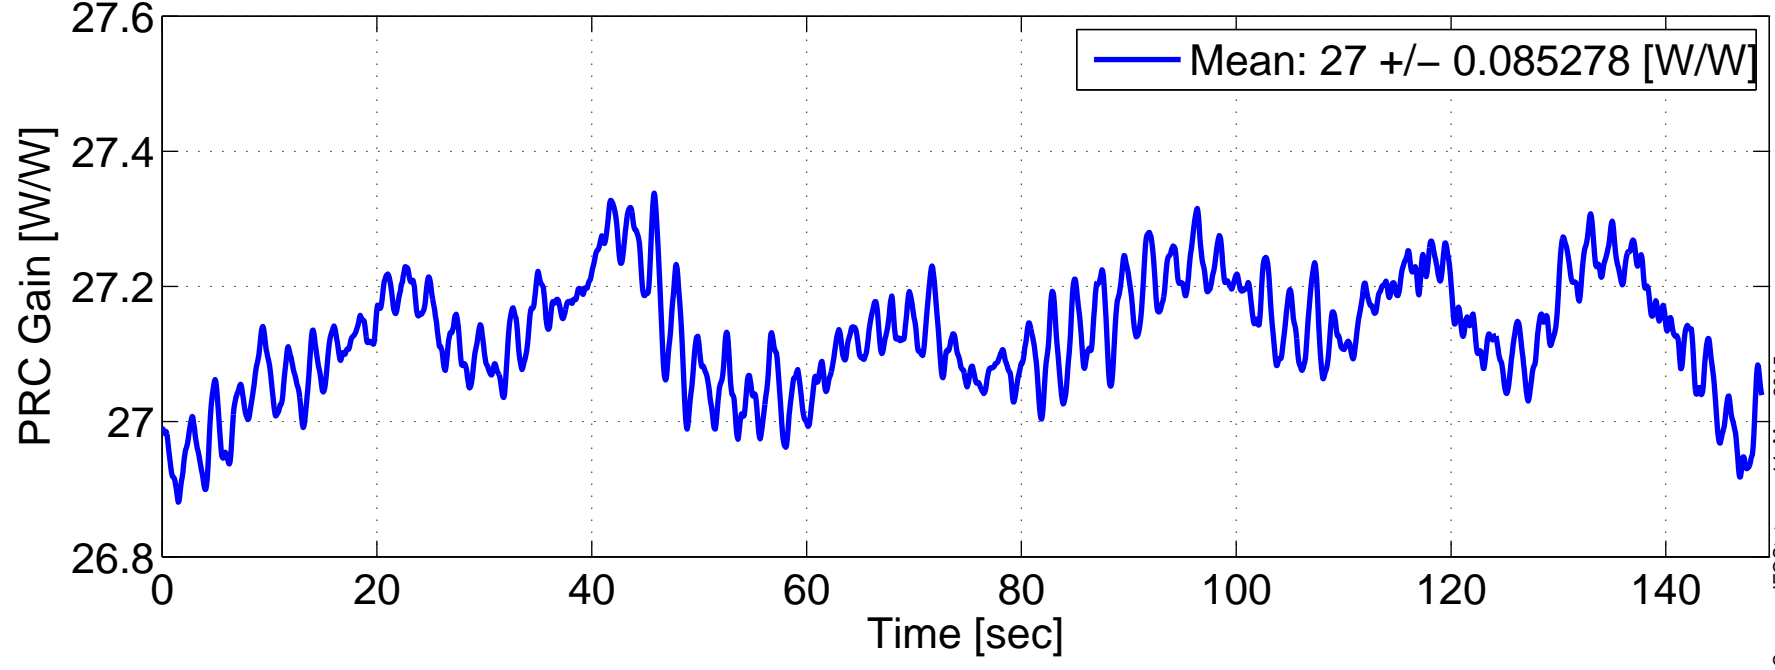


Power Into the IFO

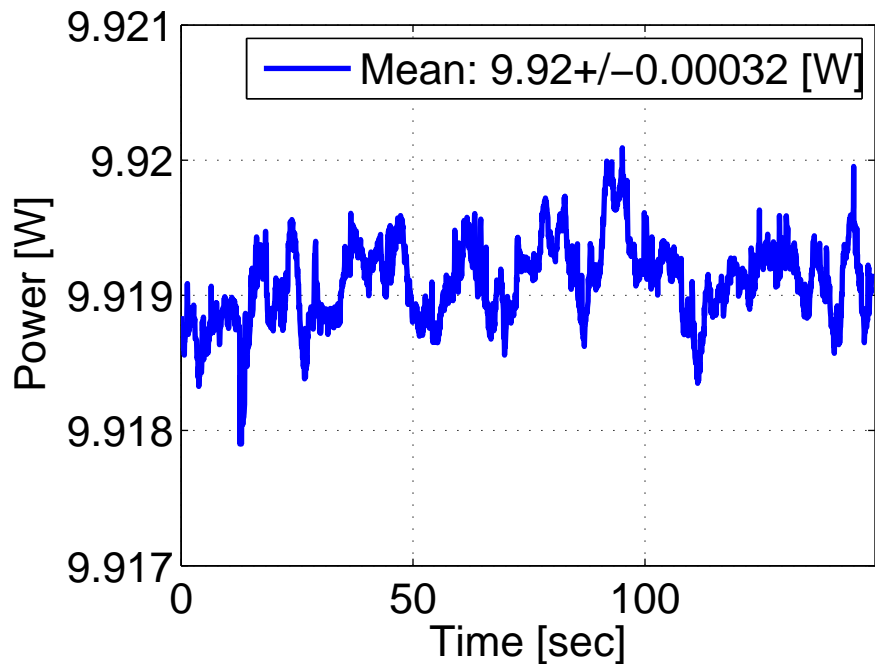


Power @ MC2 Trans

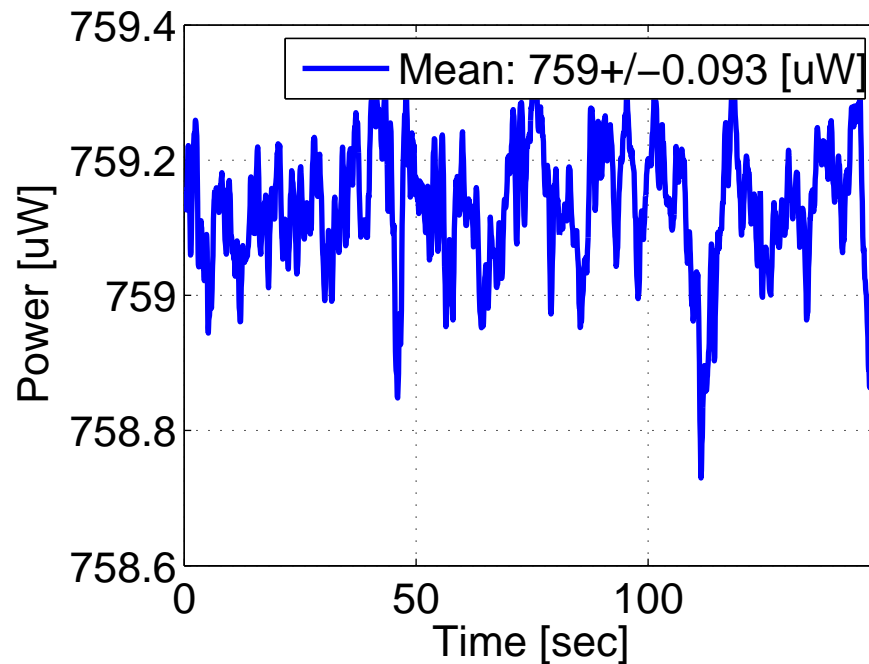


Power @ IM4 Trans

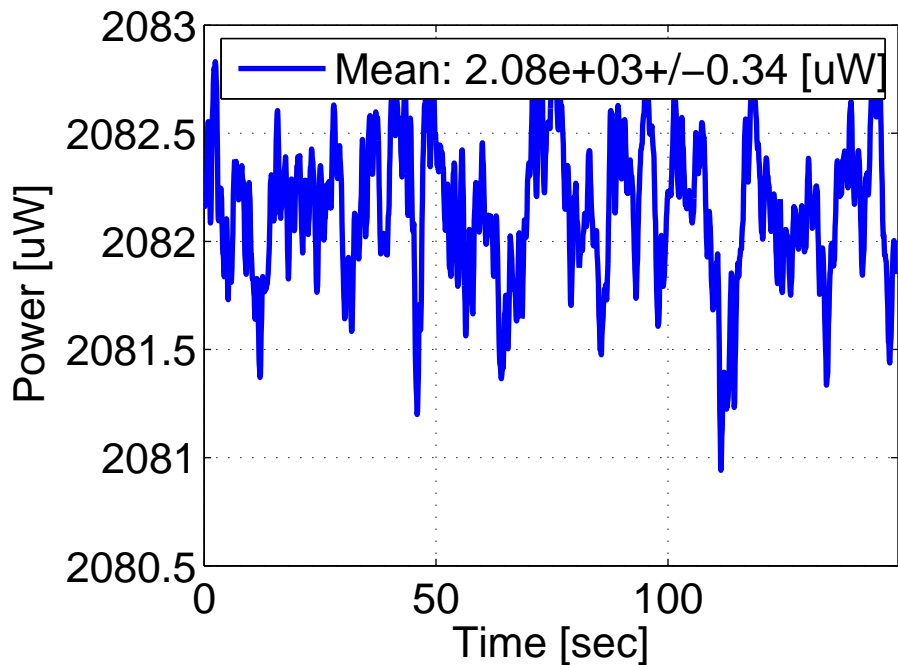


Power Scale Factor

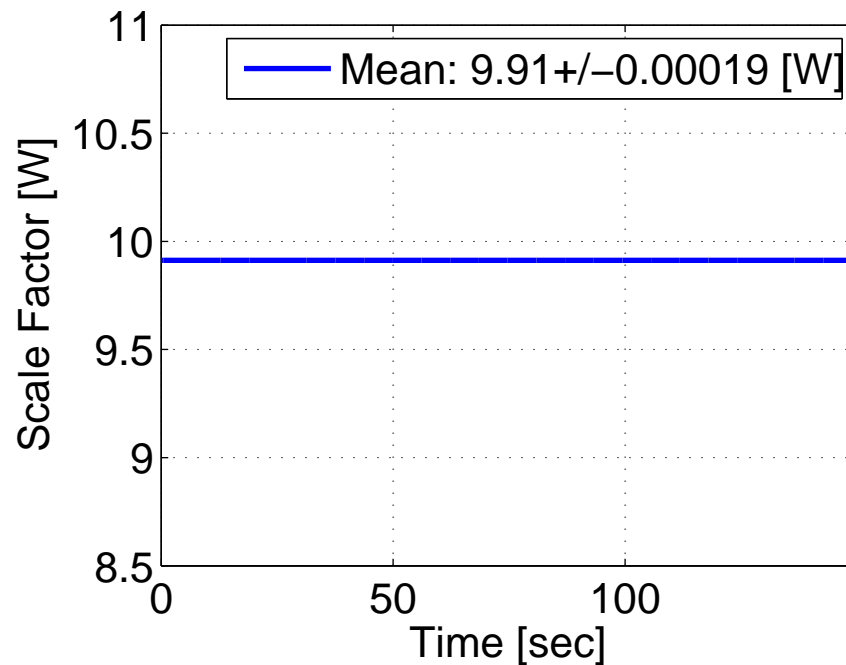


H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
Intra-Power in the IMC (Mean: 1.59 +/- 0.071 [kW])

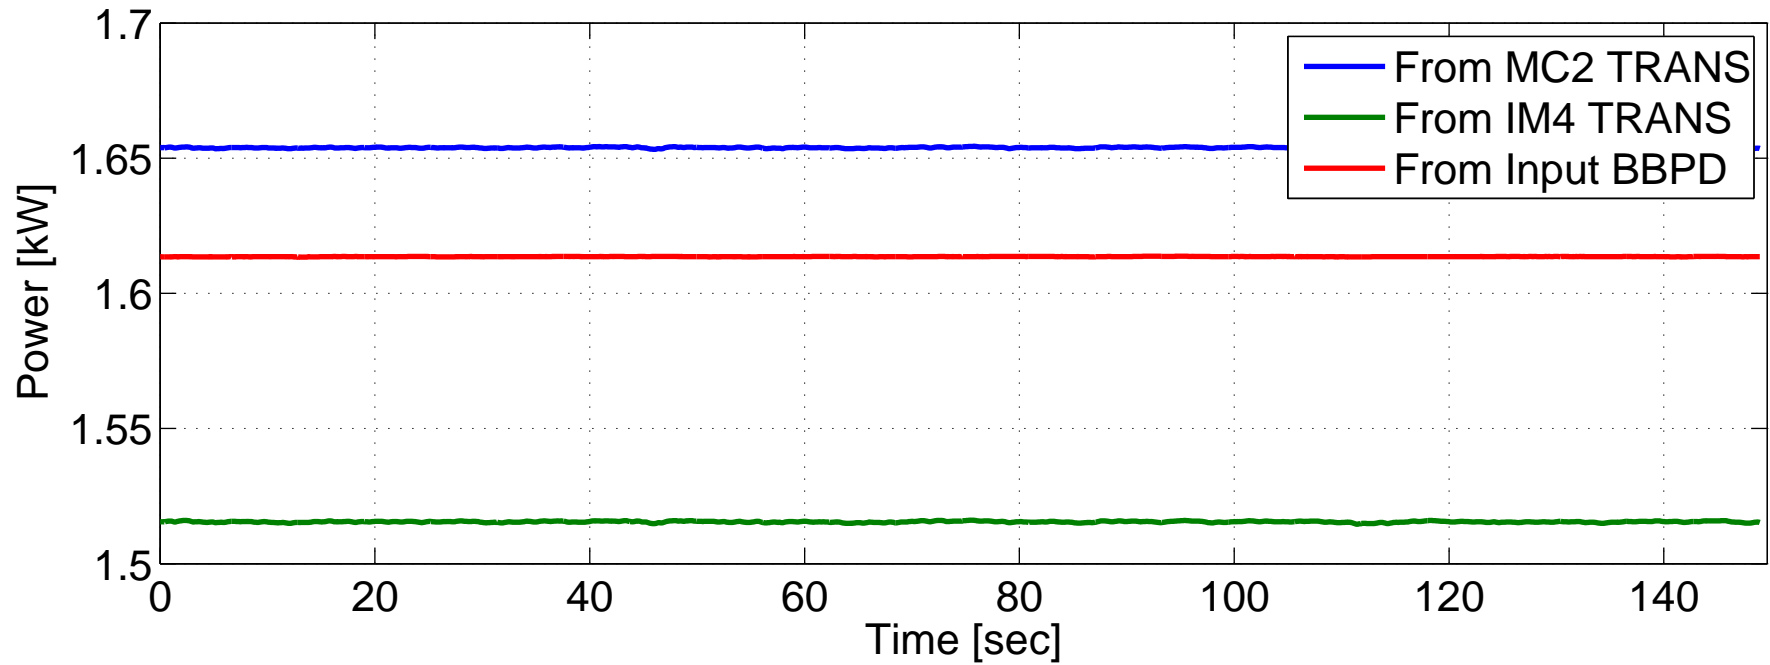


Power into PRM (Mean: 9.1 +/- 0.41 [W])

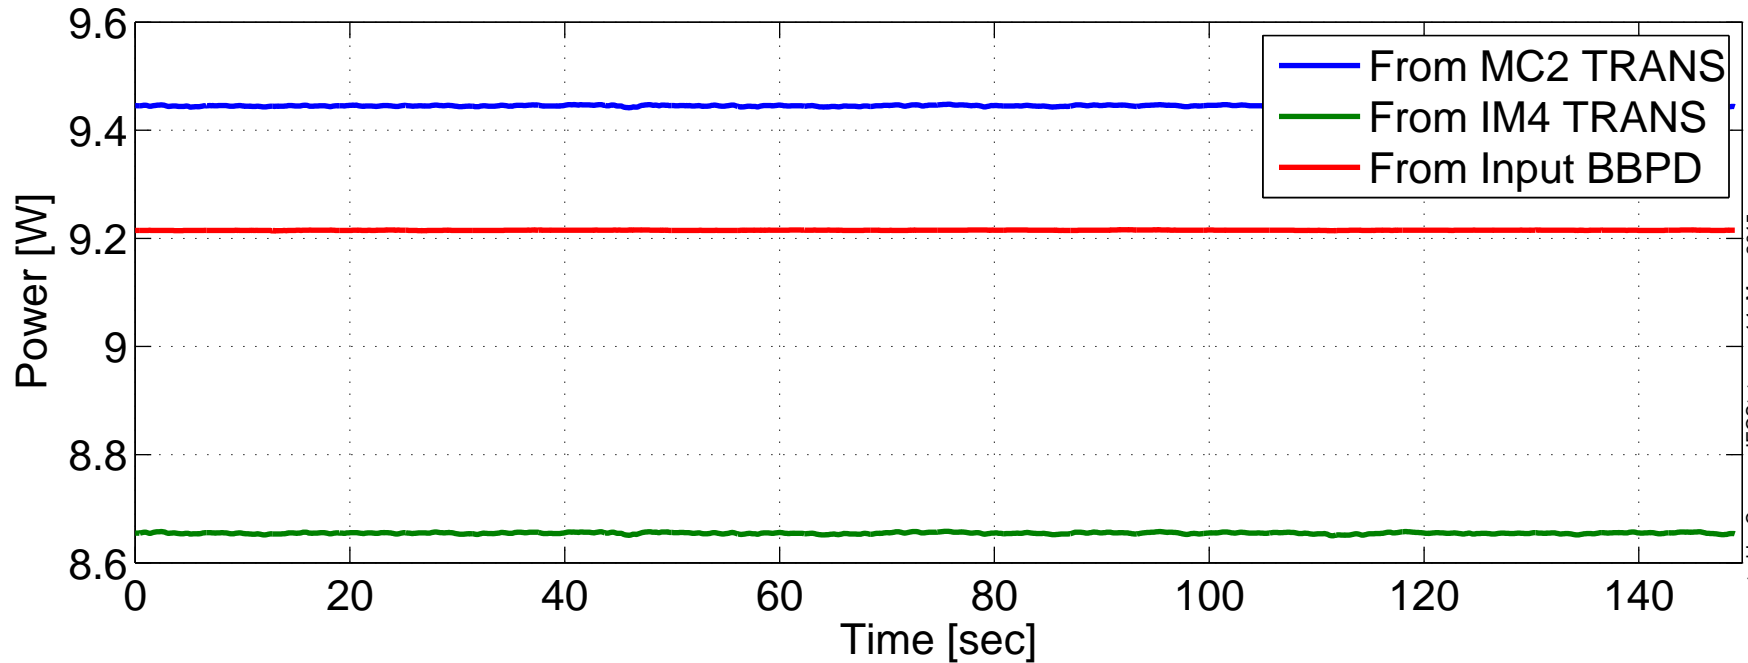


H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
POPAIR RF18 I, 9 [MHz] PRC Gain

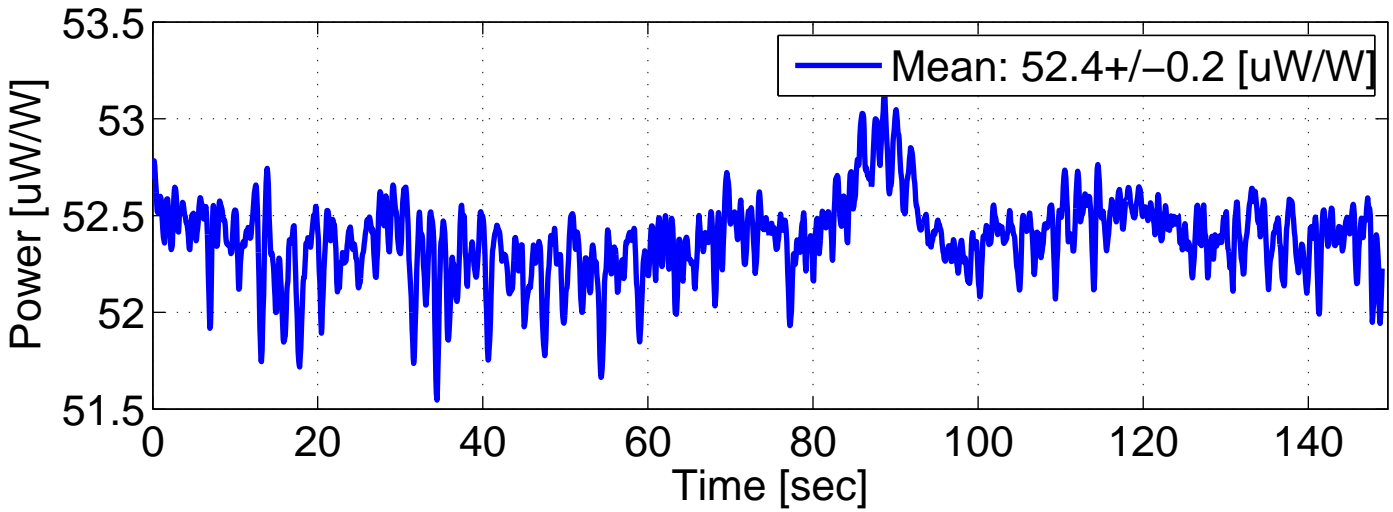


H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
POPAIR RF90 I, "SRC Reflectivity"

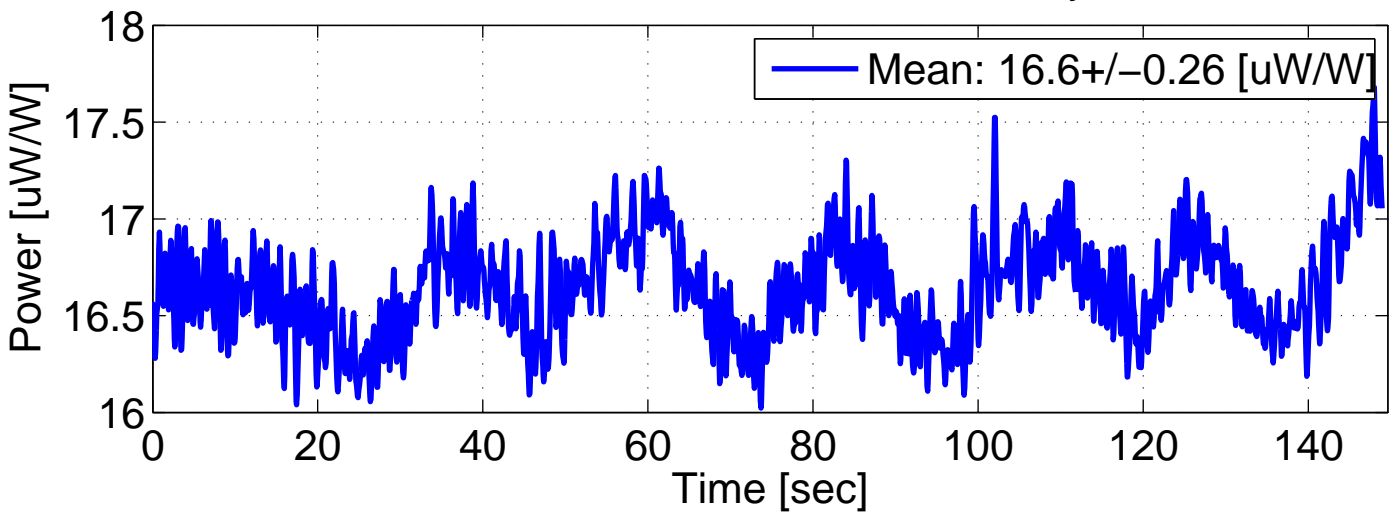

ASAIR RF90 I, "DRMI Recycling Gain"

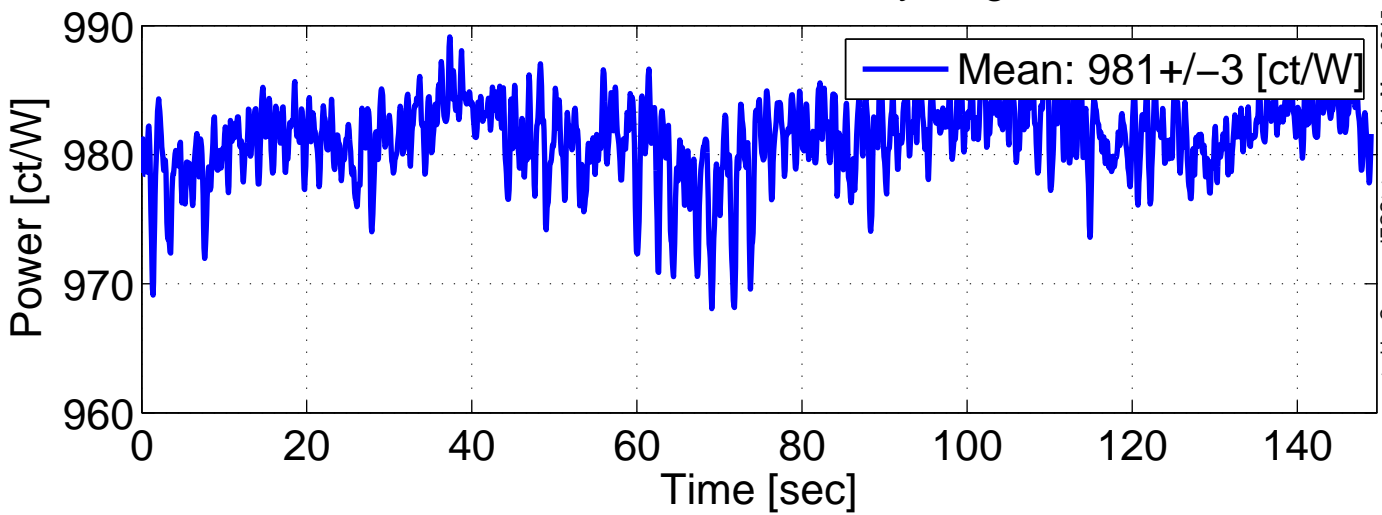

H1 DARM OLGTF, Apr 02 2015 08:34:20 UTC
MICH Subtraction Output

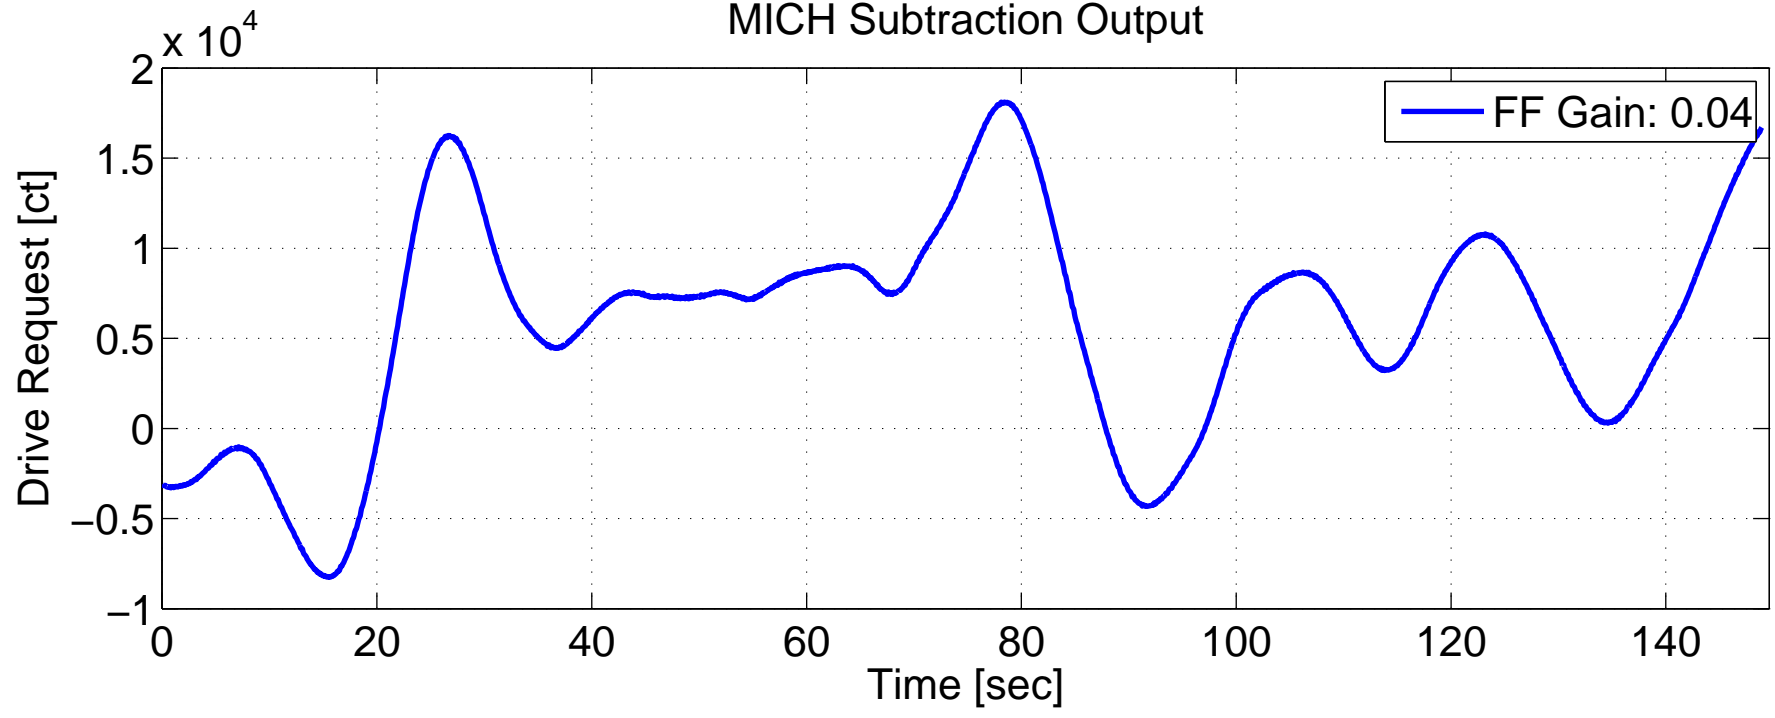

SRCL Subtraction Output

