


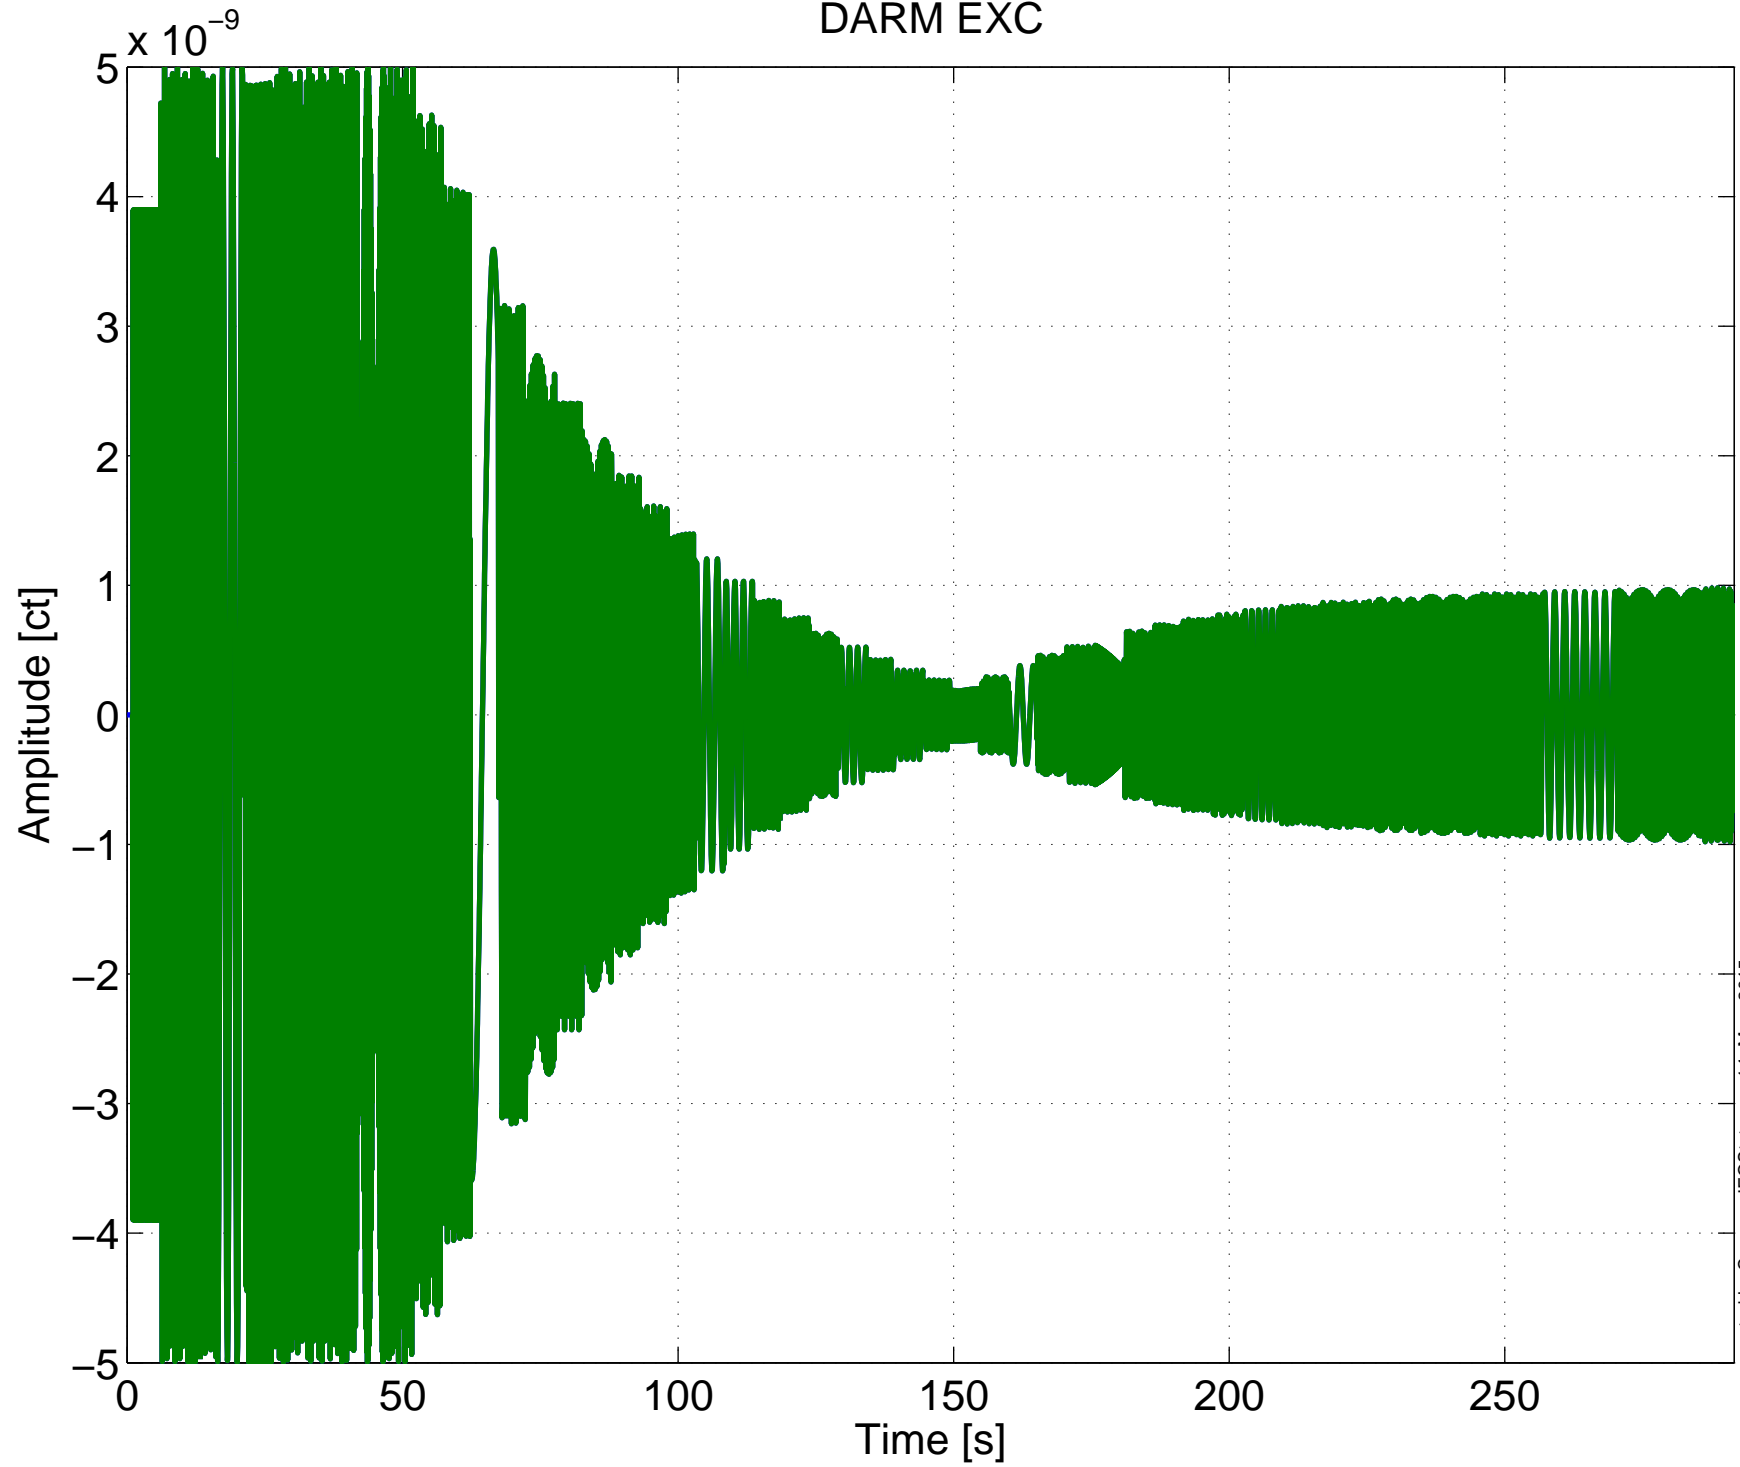
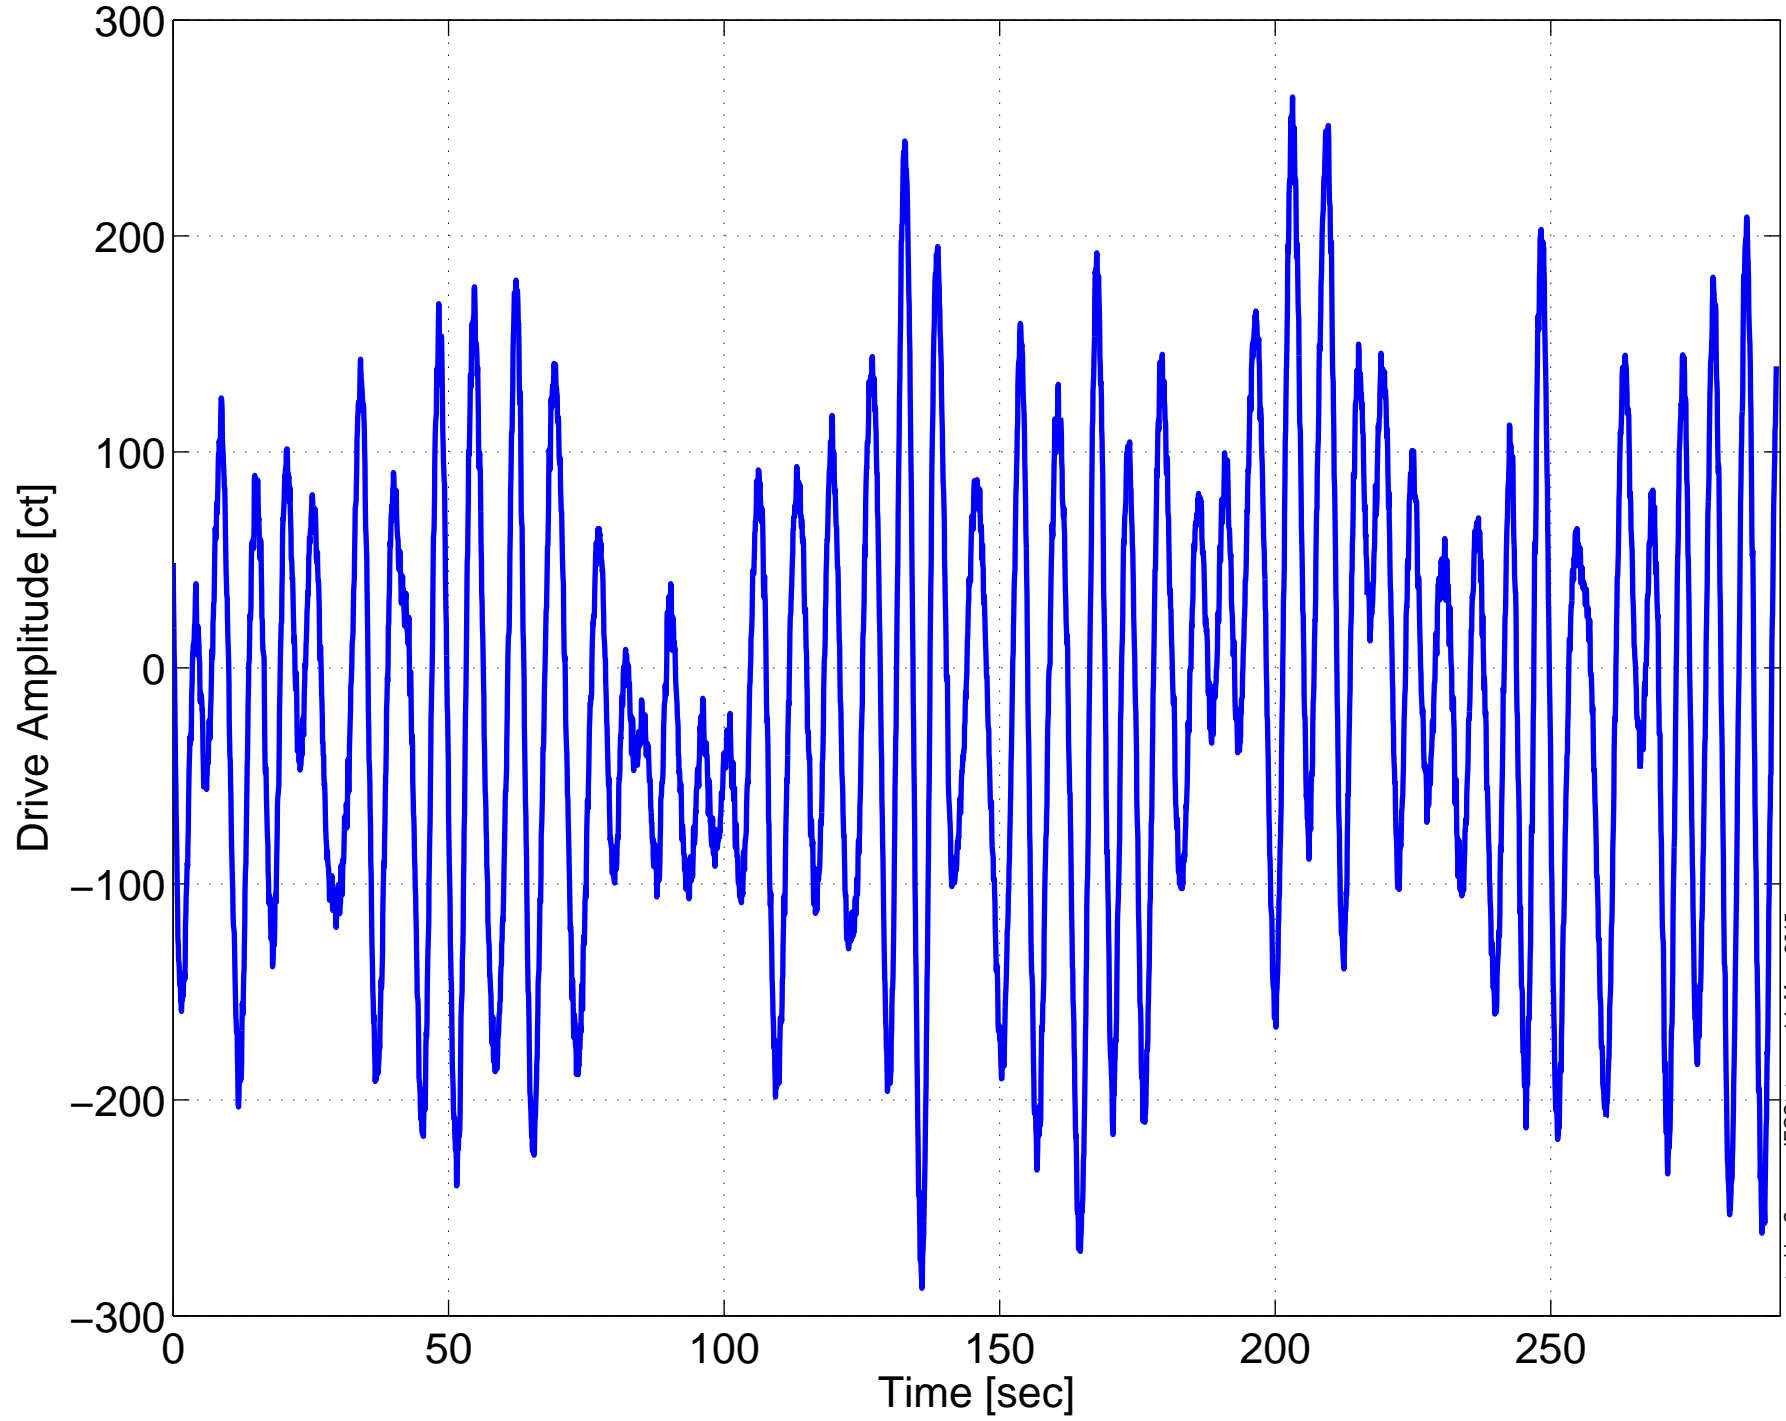
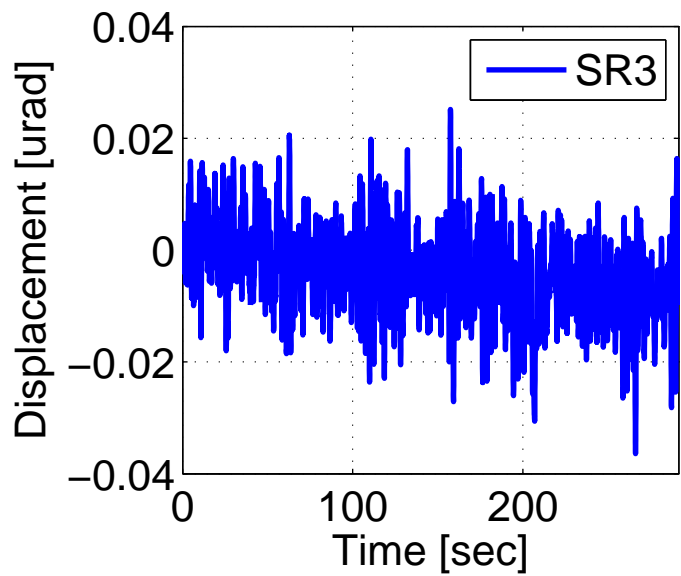
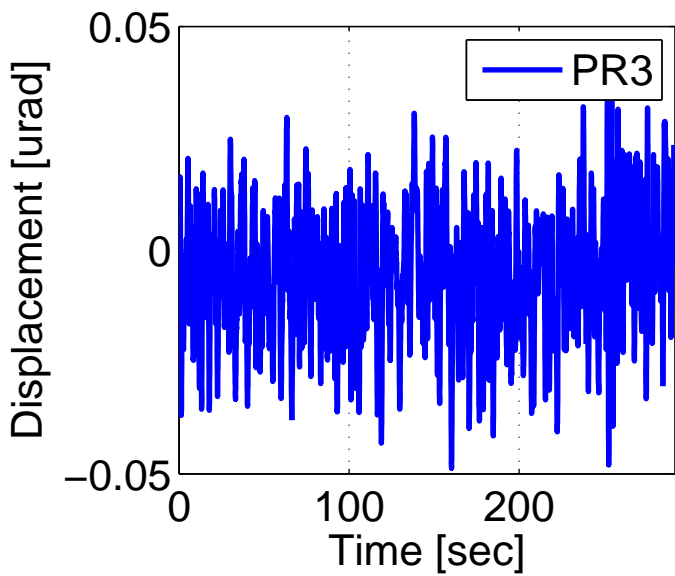
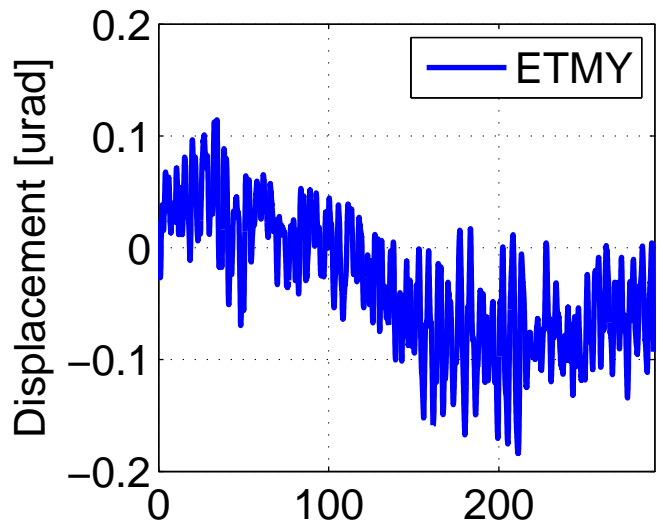


H1 DARM OLGTF, May 14 2015 09:21:34 UTC
DARM EXC

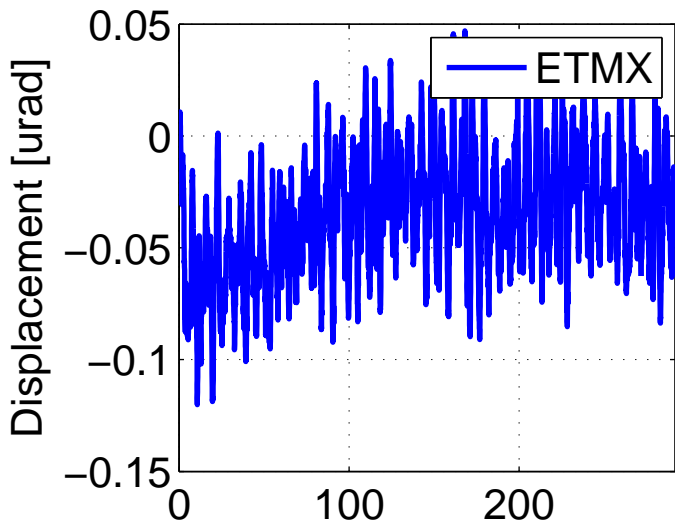








H1 DARM OLGTF, May 14 2015 09:21:34 UTC
Diff. SOFT (ITMX) Control Signal

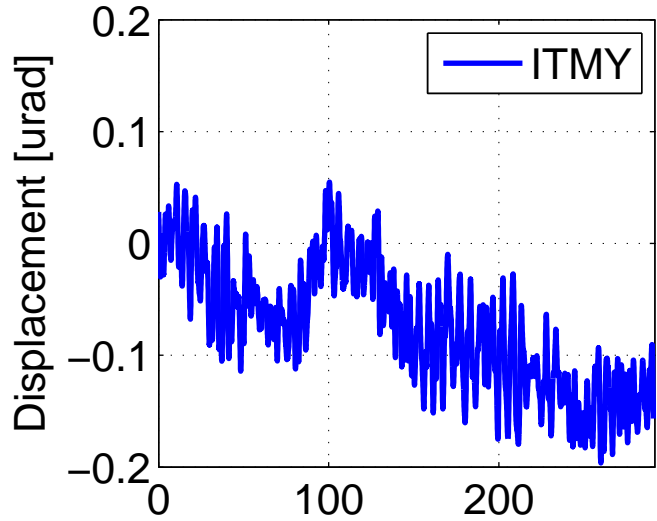

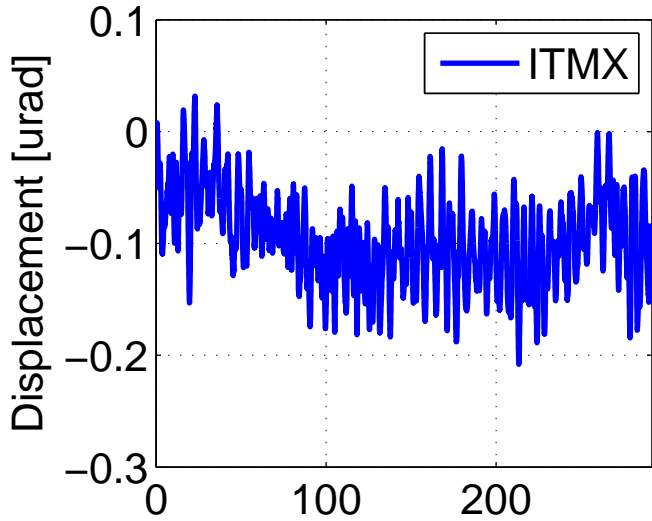


H1 DARM OLGTF, May 14 2015 09:21:34 UTC
Common SOFT (ITMY) Control Signal

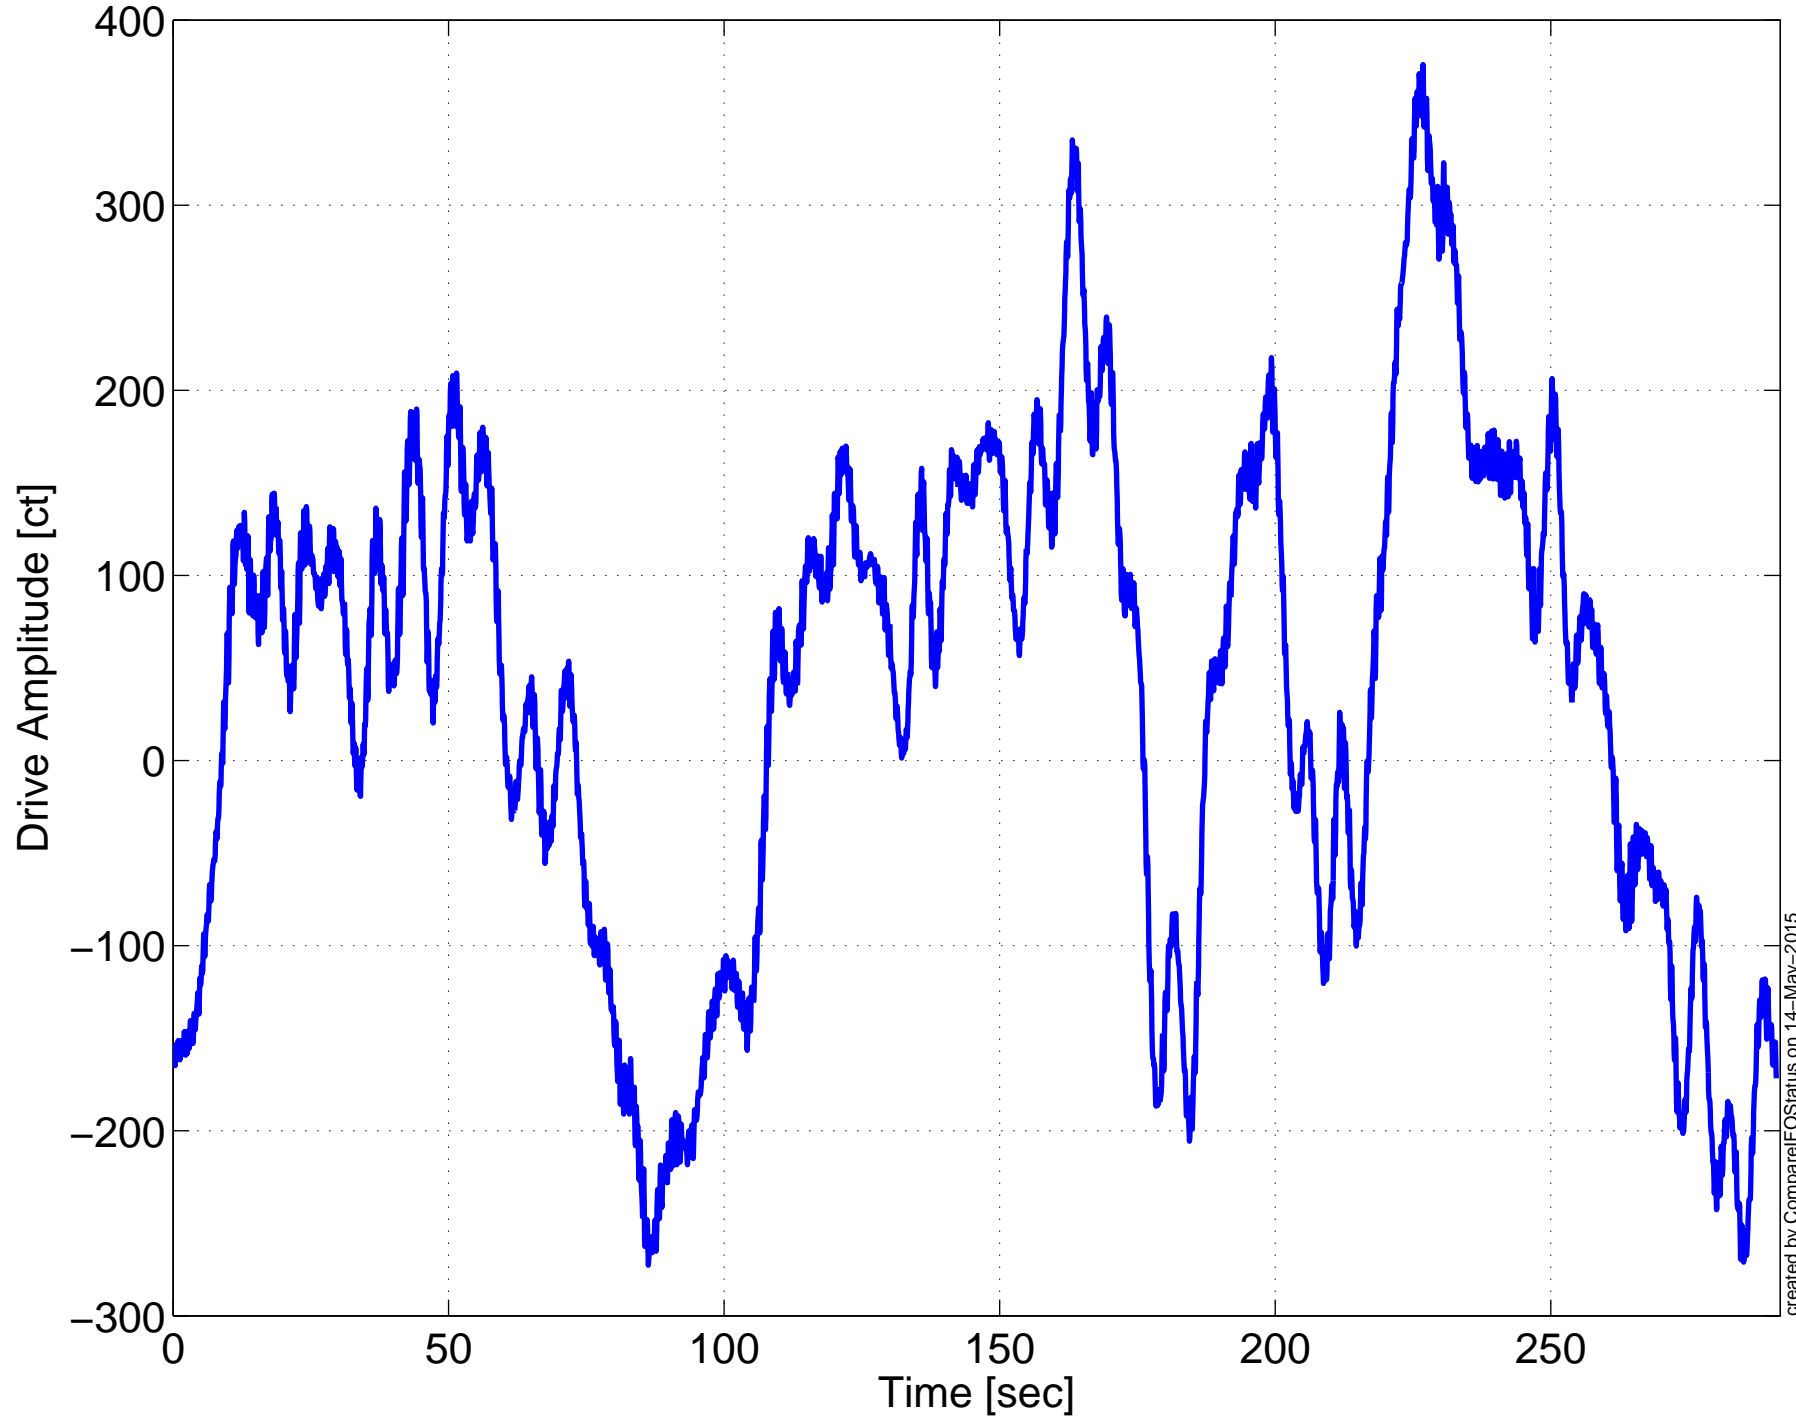


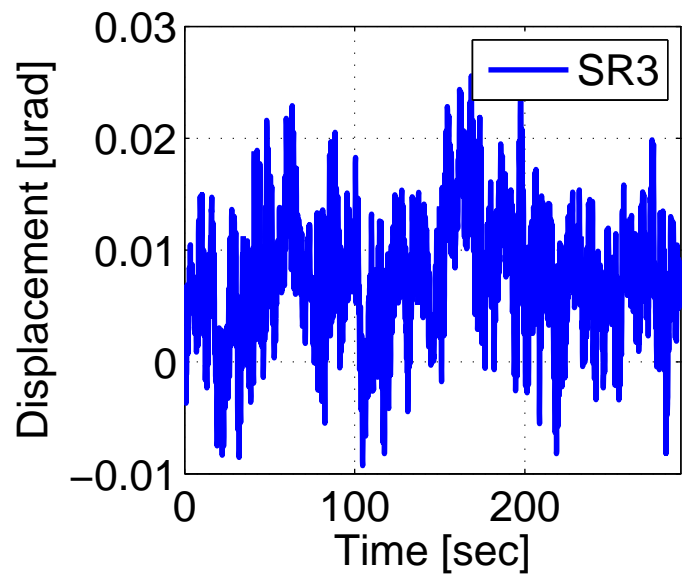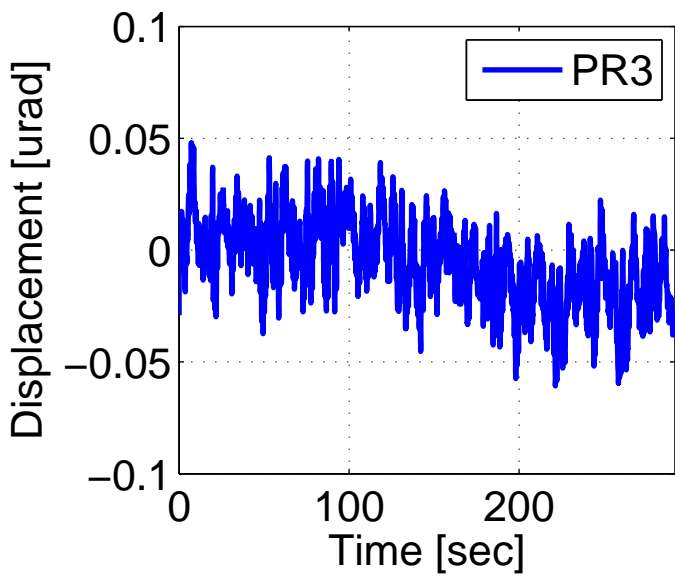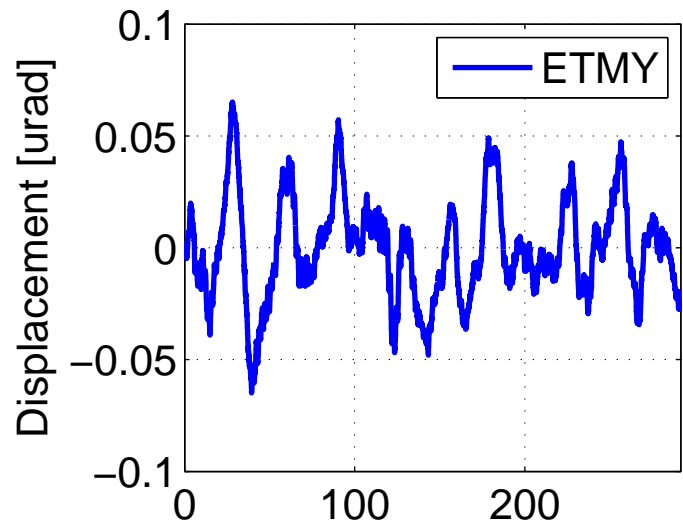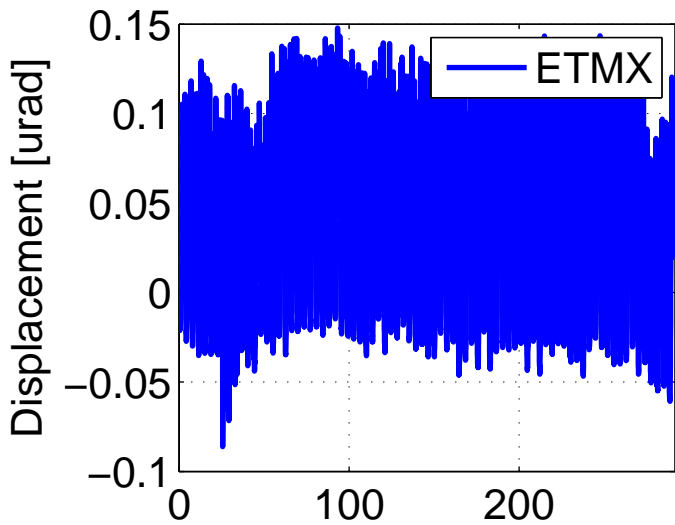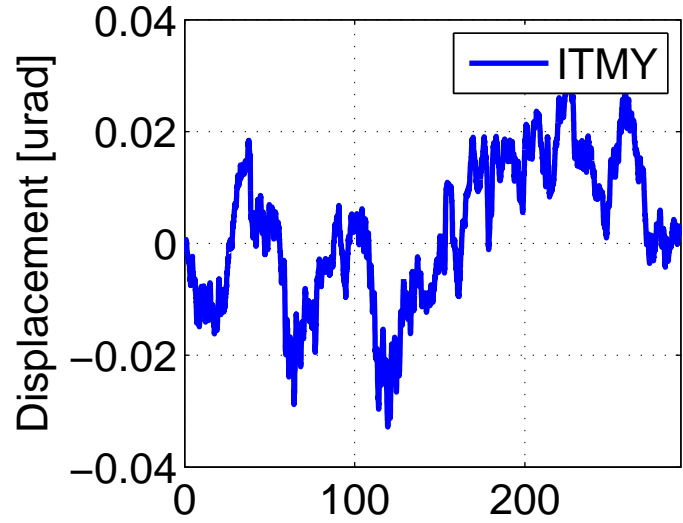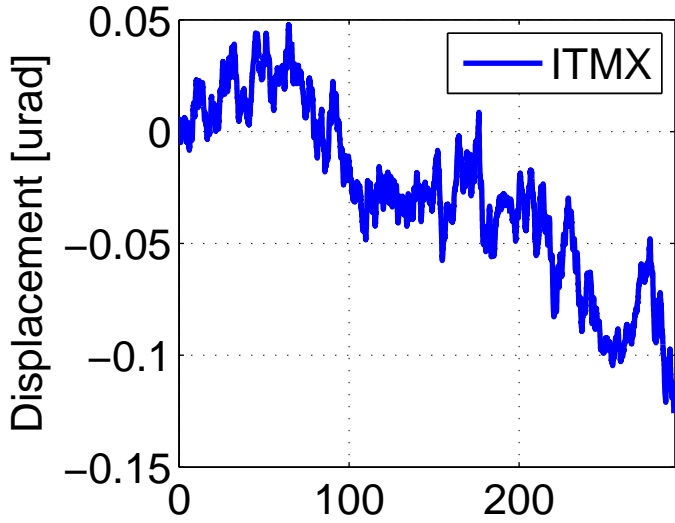

H1 DARM OLGTF, May 14 2015 09:21:34 UTC
TCS ITMX CO2 Laser Power

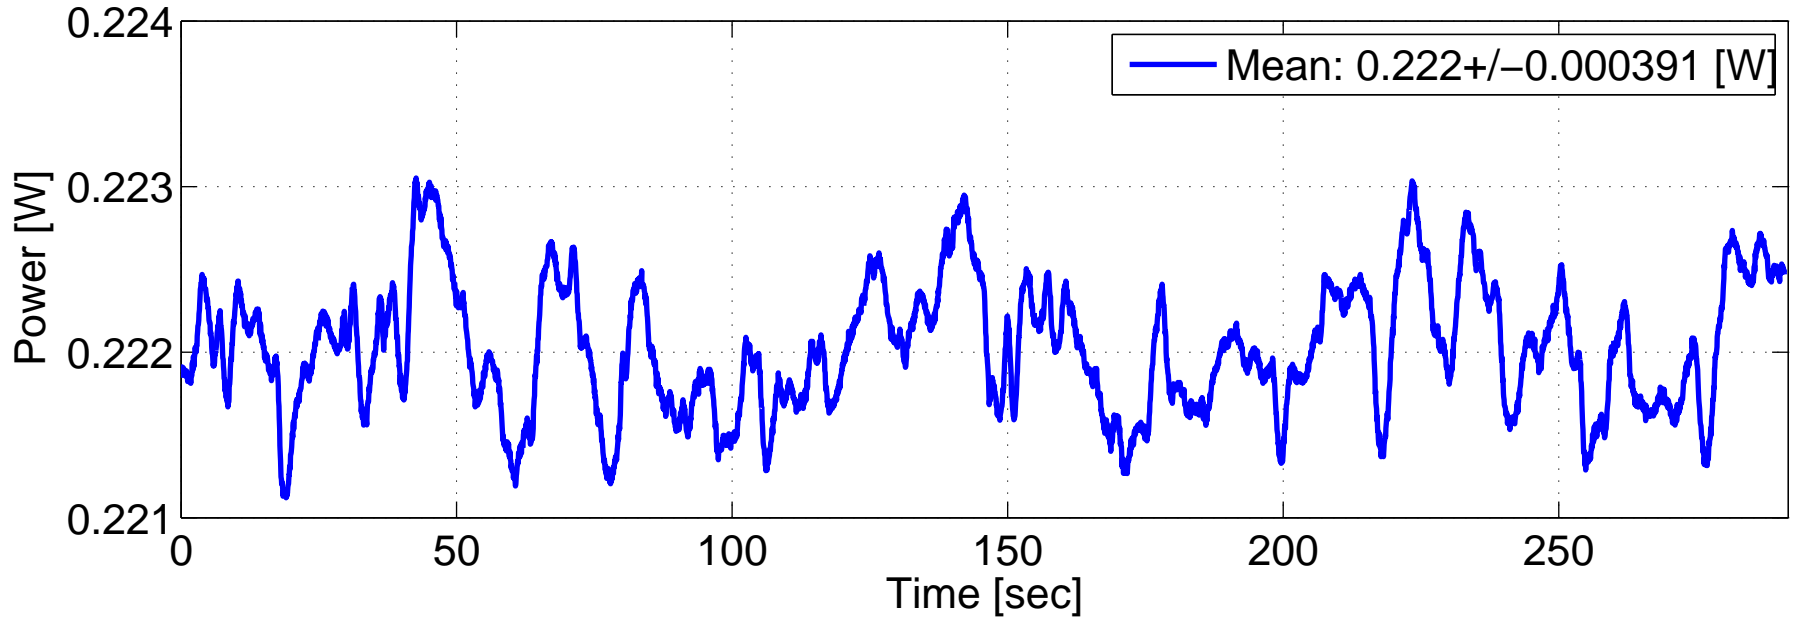


H1 DARM OLGTF, May 14 2015 09:21:34 UTC
TCS ETMX Ring Heater Power

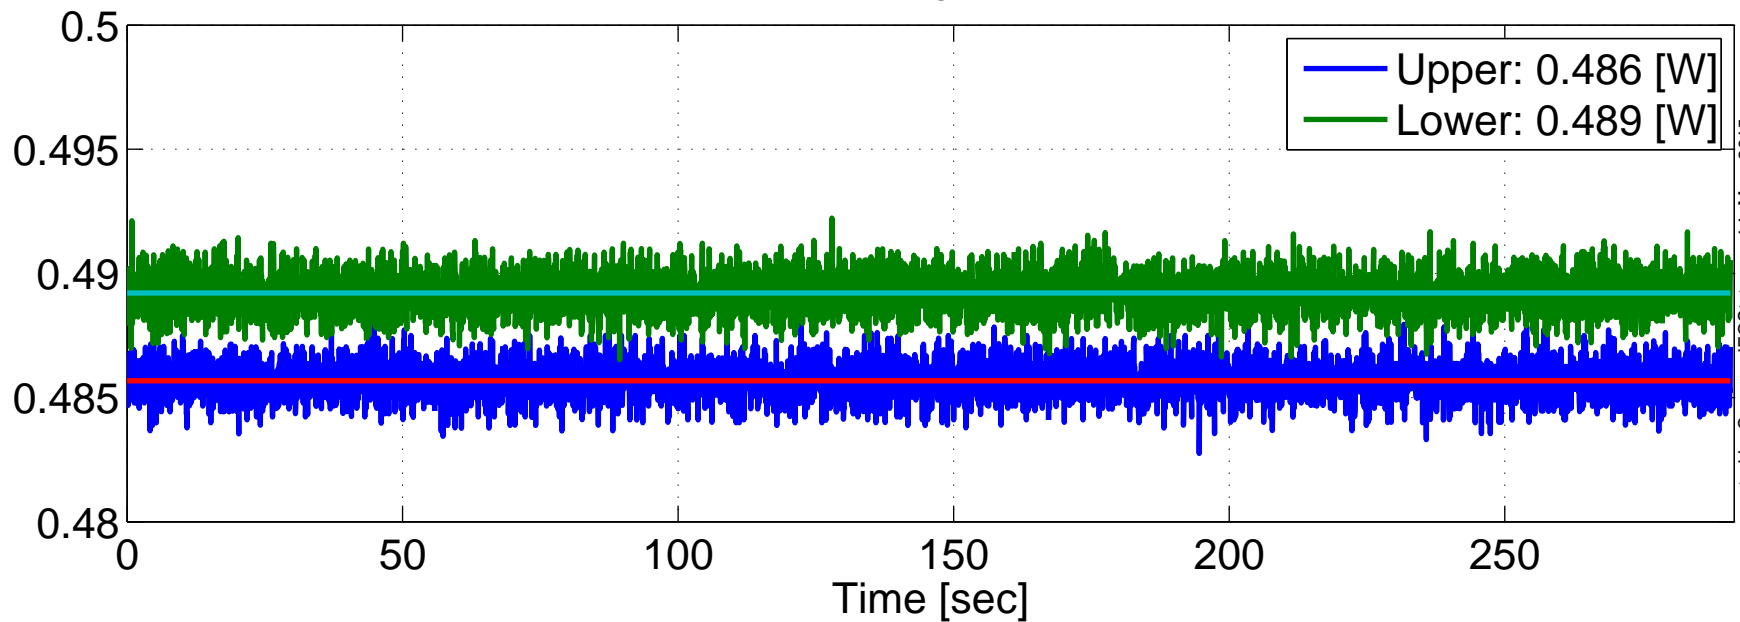


H1 DARM OLGTF, May 14 2015 09:21:34 UTC


Power Recycling Gain, Carrier

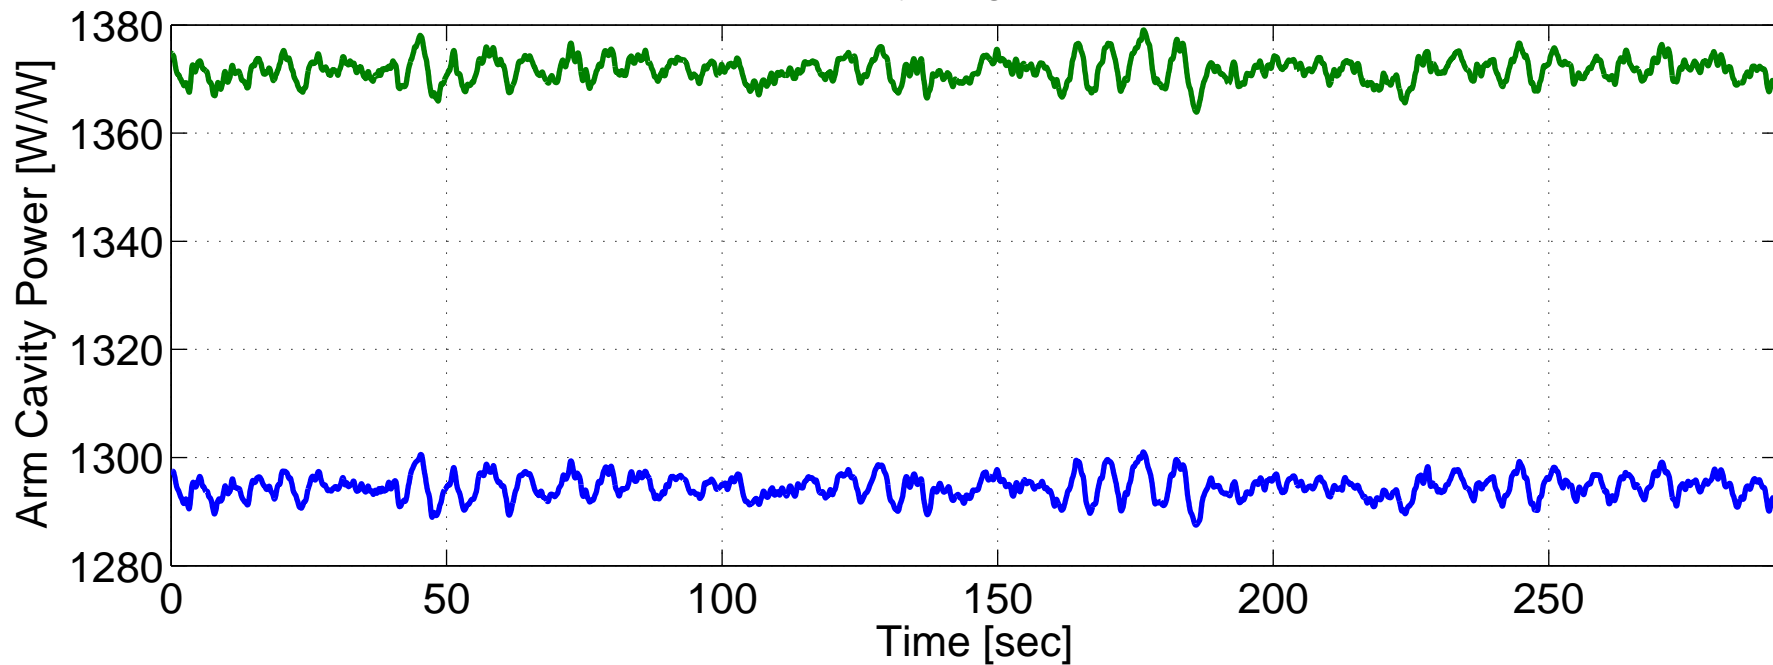


QPD Normalization Gains: [X,Y] = [0.23601,0.22999]

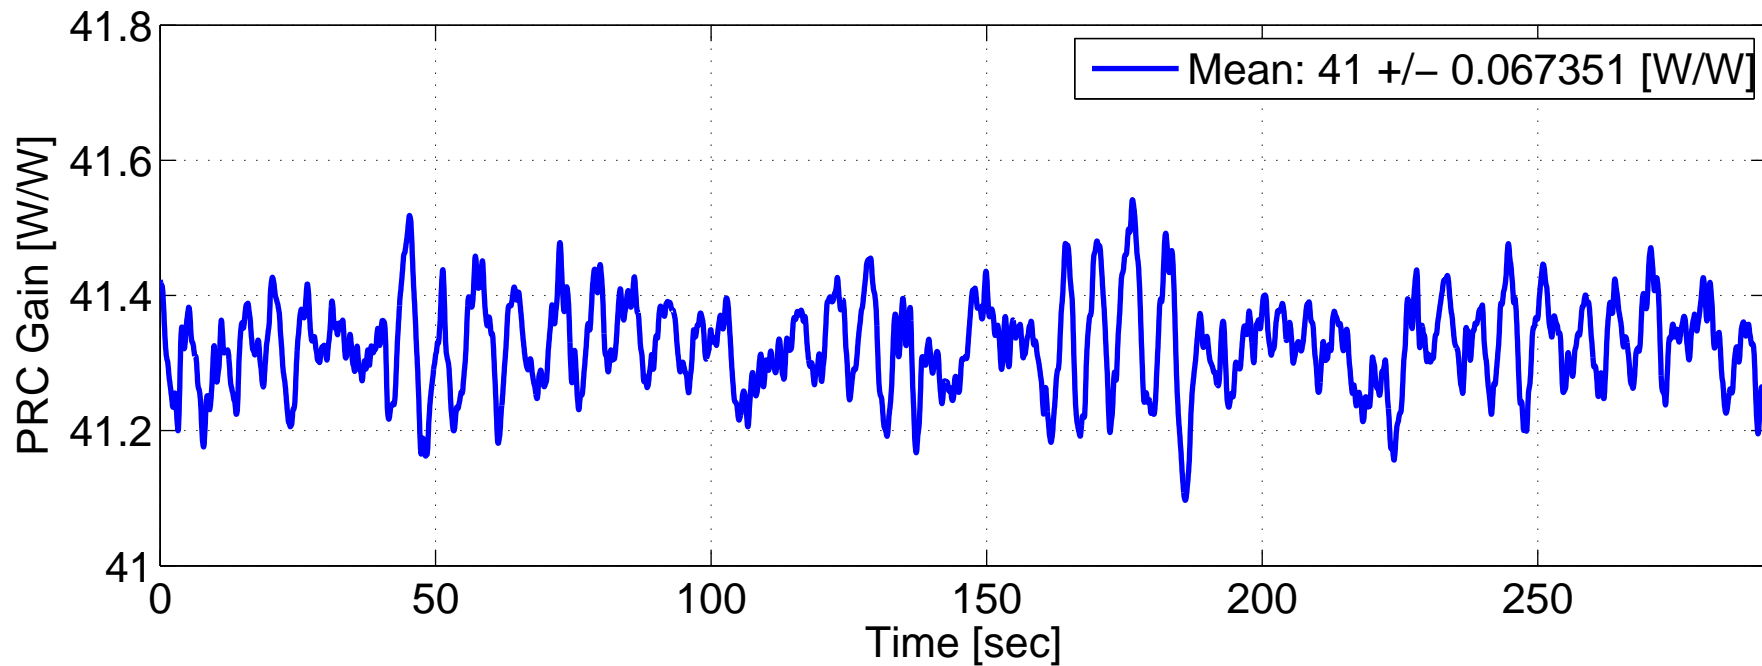


Power Into the IFO

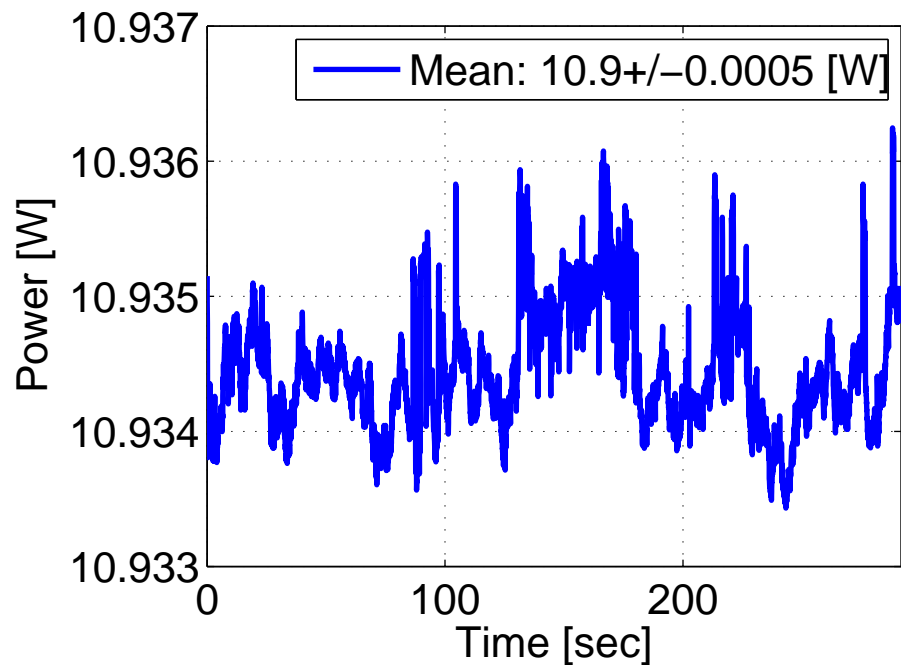


Power @ MC2 Trans

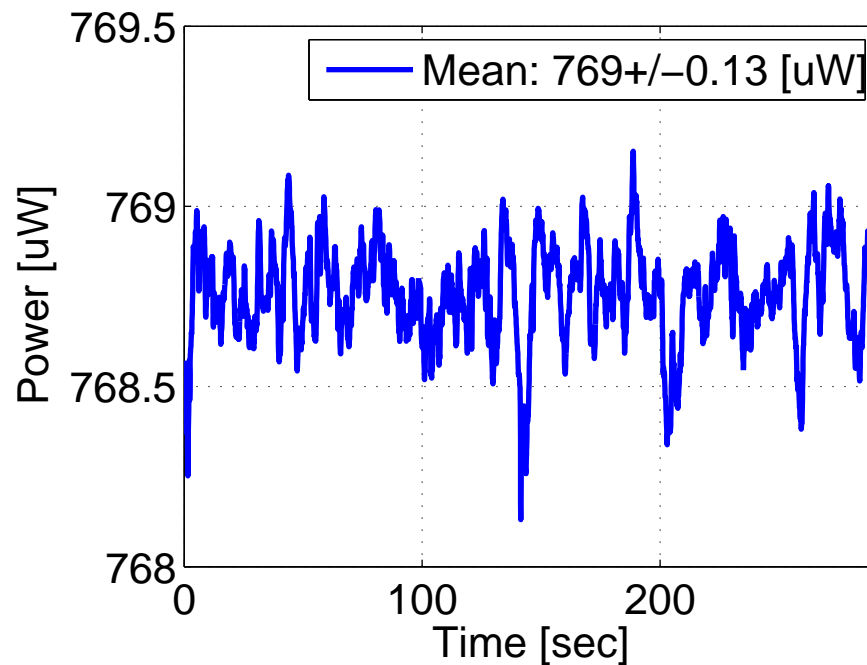


Power @ IM4 Trans

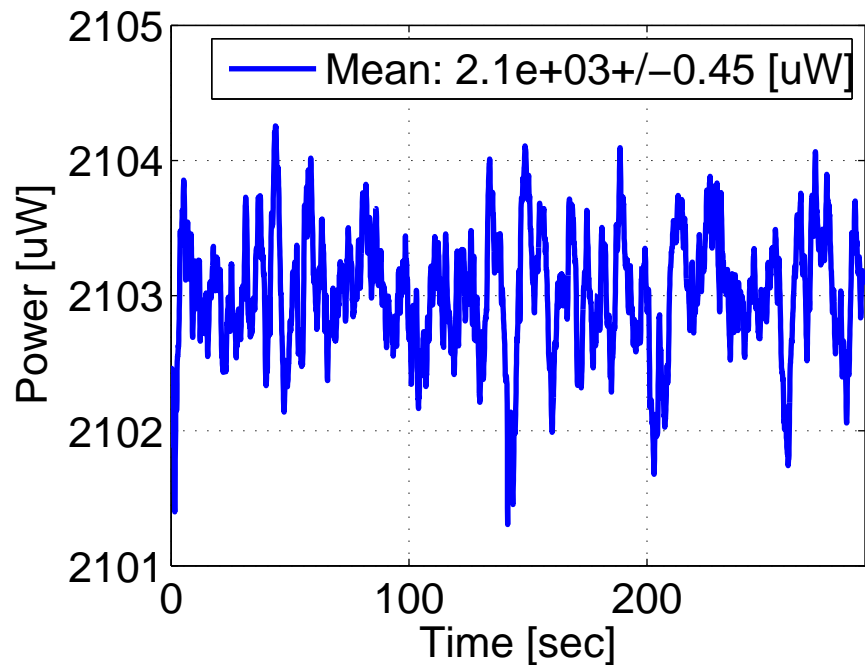


Power Scale Factor

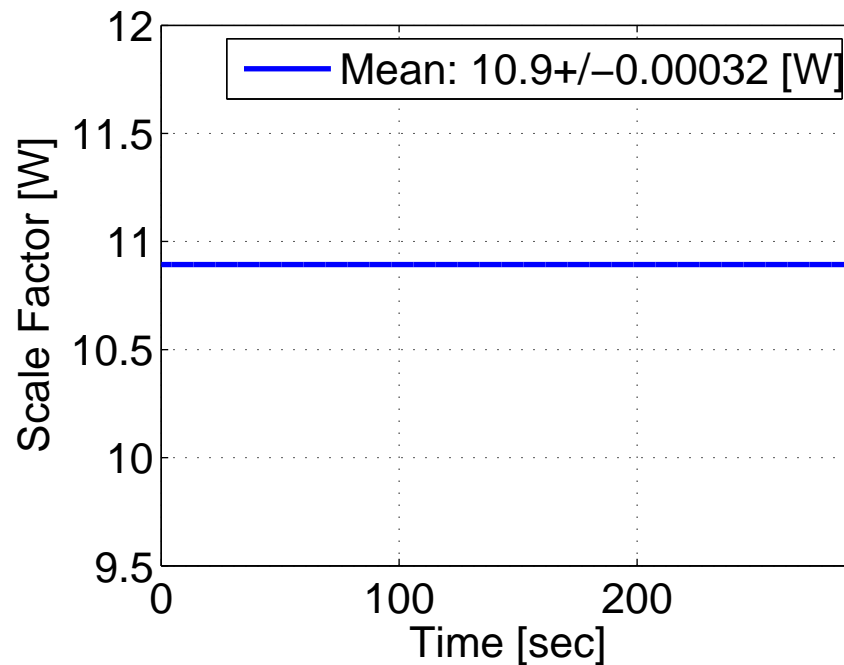


H1 DARM OLGTF, May 14 2015 09:21:34 UTC
Intra-Power in the IMC (Mean: 1.66 +/- 0.12 [kW])

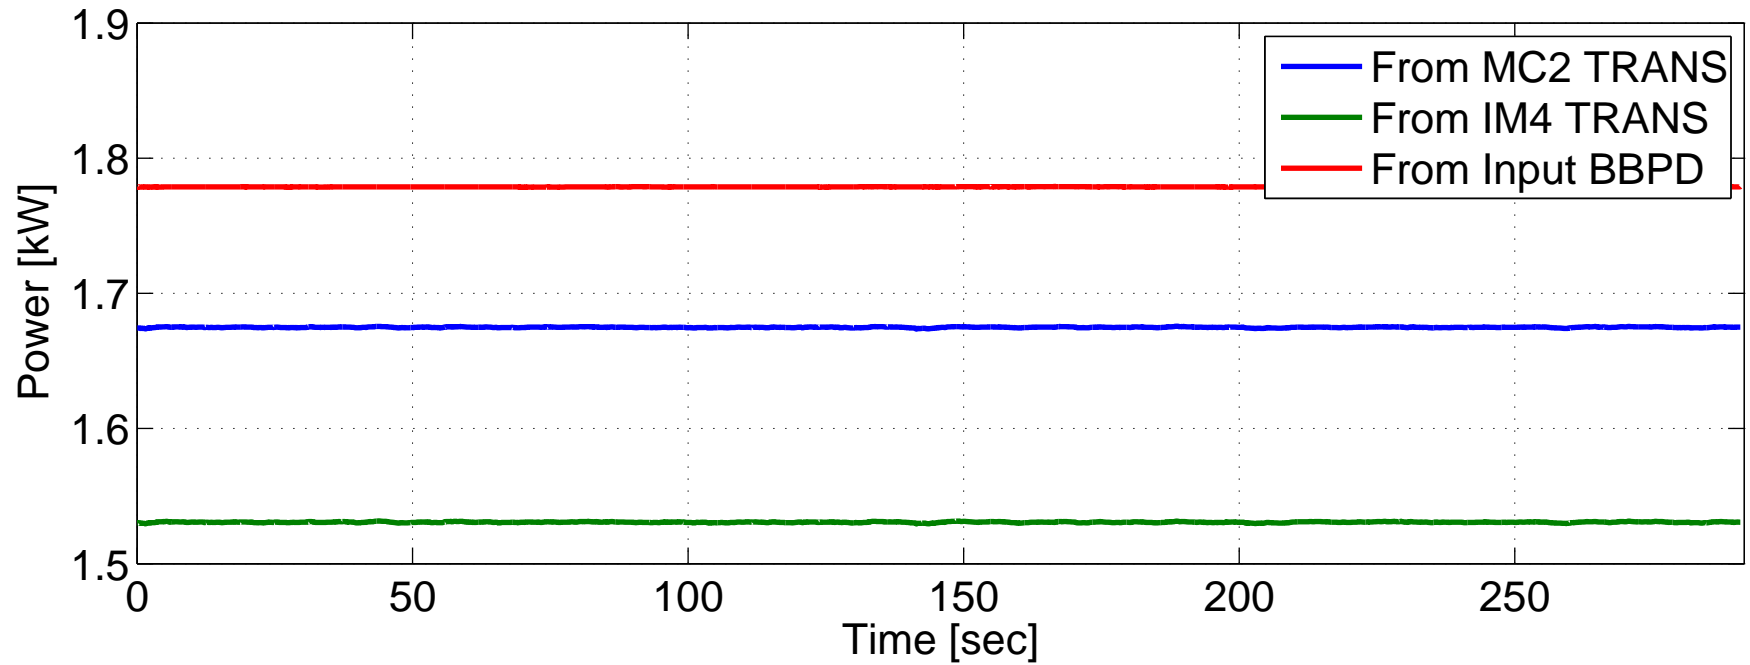


Power into PRM (Mean: 9.49 +/- 0.71 [W])

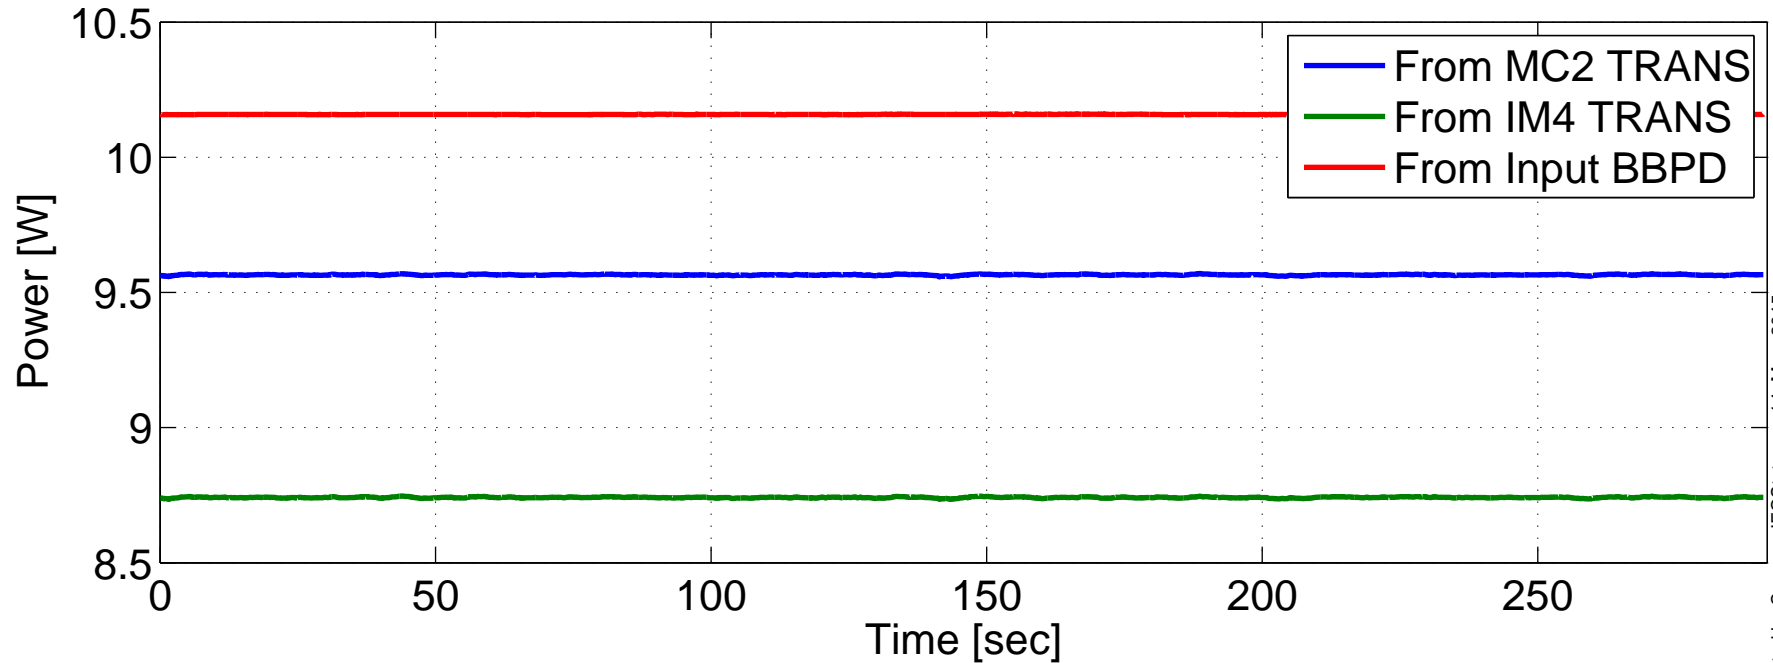


H1 DARM OLGTF, May 14 2015 09:21:34 UTC
POPAIR RF18 I, 9 [MHz] PRC Gain

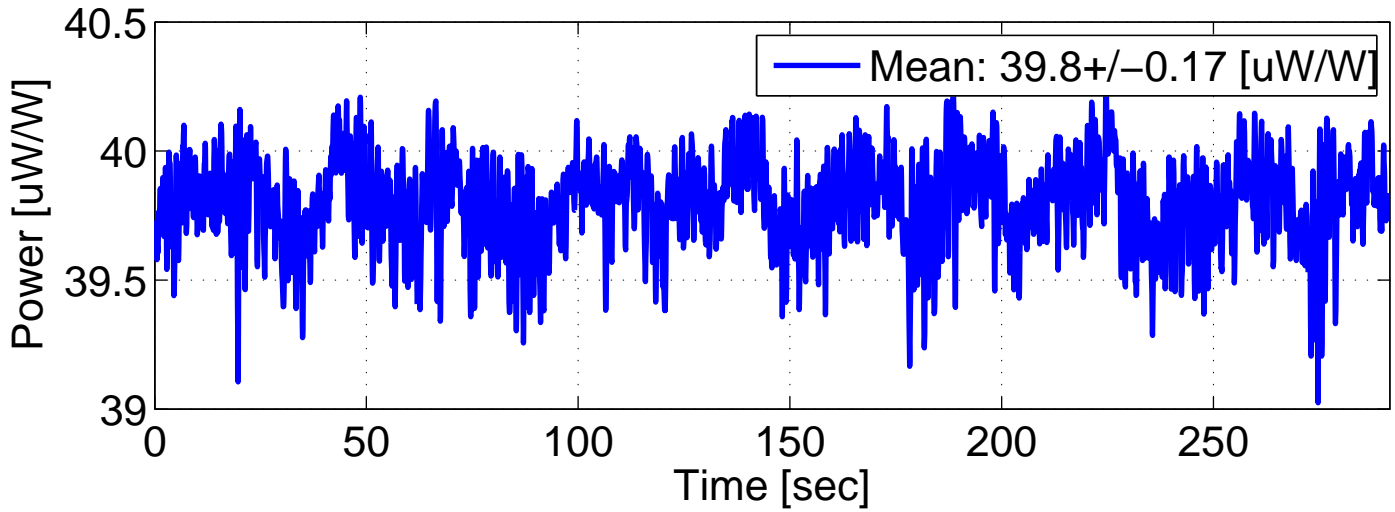


H1 DARM OLGTF, May 14 2015 09:21:34 UTC
POPAIR RF90 I, "SRC Reflectivity"

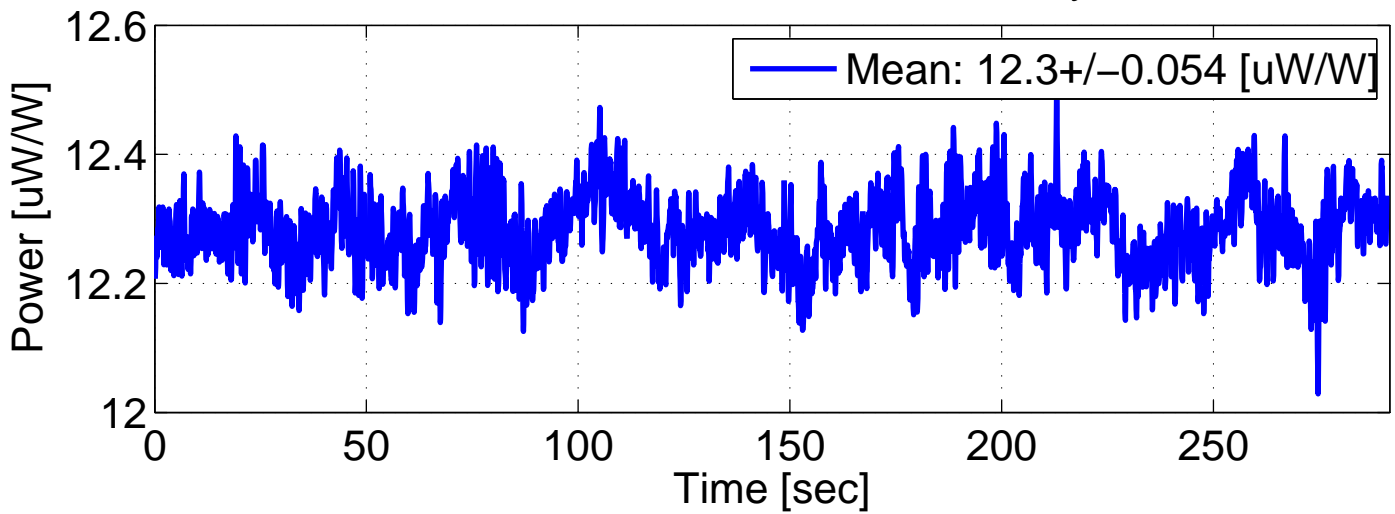

ASAIR RF90 I, "DRMI Recycling Gain"

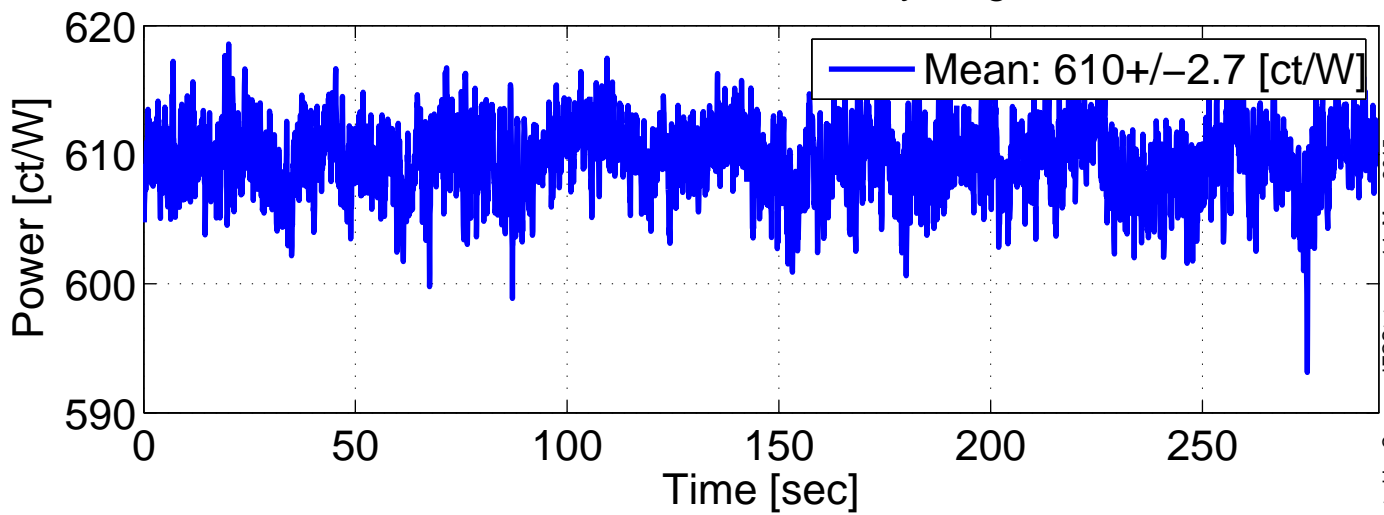

H1 DARM OLGTF, May 14 2015 09:21:34 UTC
MICH Subtraction Output

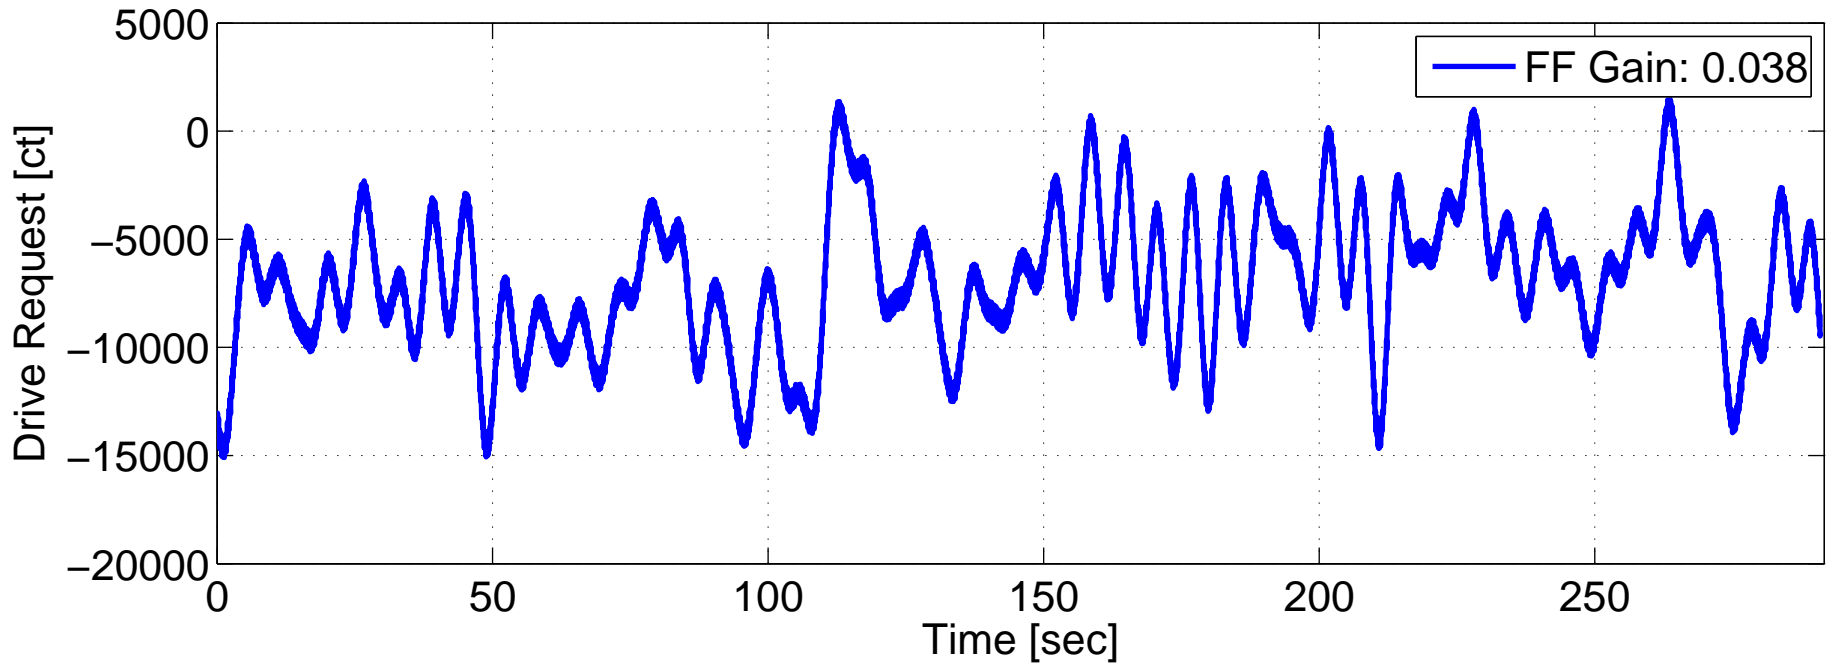

SRCL Subtraction Output

