

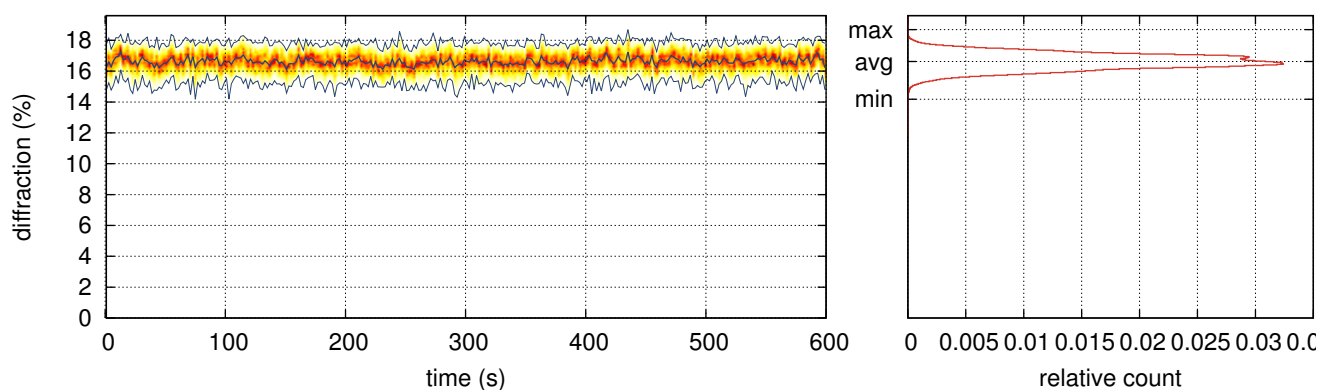
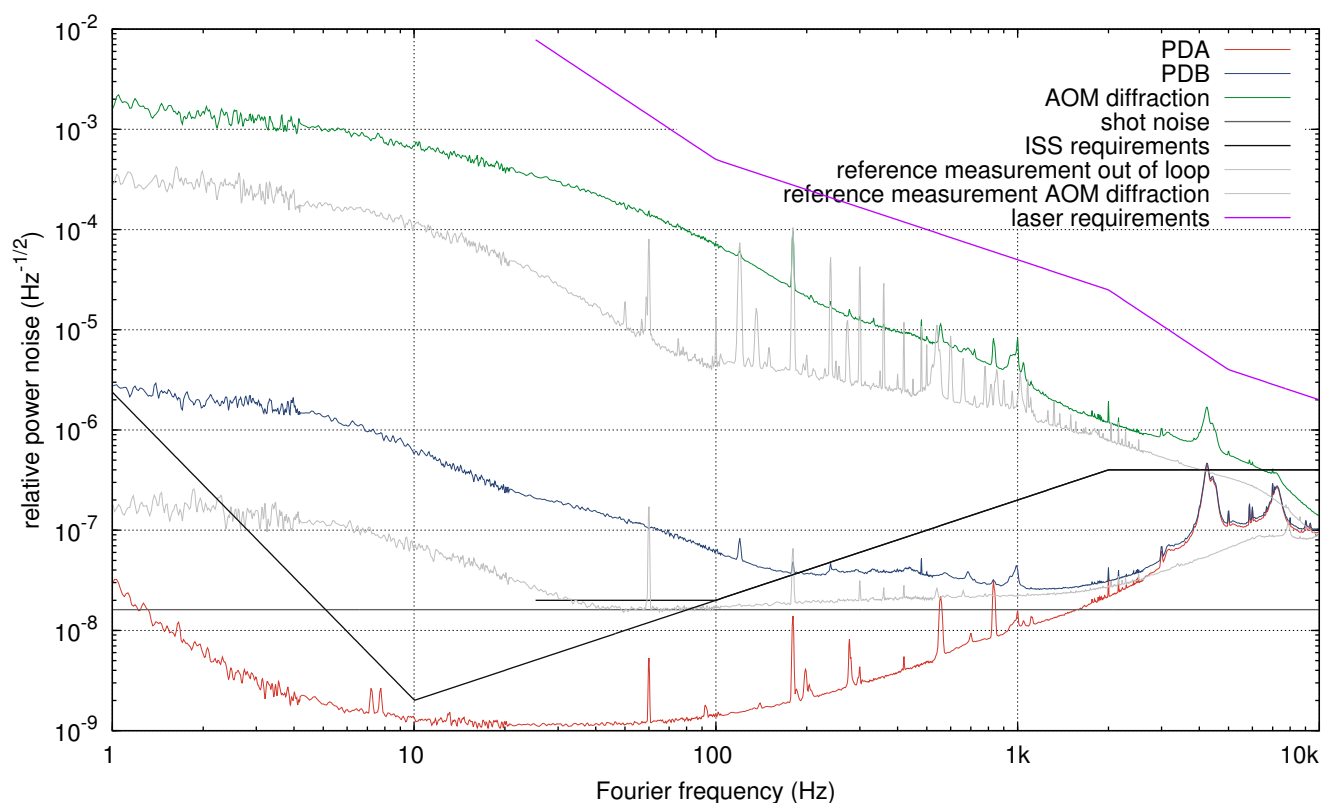


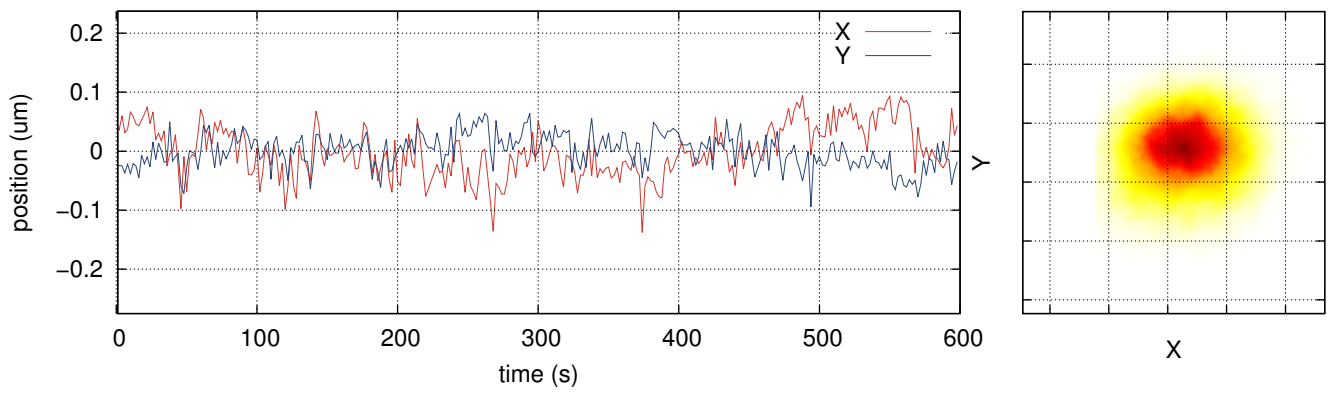

POWER STABILIZATION	
Measurement:	600 s = 10.0 min, 29. Jul 2016 08:50 PDT
Stabilization:	first loop closed, integrator on; second loop injection off
Reference signal:	-1.666 V
First-loop gain:	6.0 dB
Last saturation event:	0d 11h 41m
Average AOM diffraction:	16.63%
Diffraction signal range:	14.18%...18.70% (4.52% peak-to-peak, 32768 Hz samplingrate)

POWER NOISE		
	Photodiode A (PDA)	Photodiode B (PDB)
Average DC signal:	8.413 V	8.009 V
FILT signal range:	1.677 V...1.688 V (0.001 V _{rms})	1.558 V...1.648 V (0.010 V _{rms})
FILT samplingrate:	32768 Hz	32768 Hz
Photocurrent:	2.5 mA	2.4 mA
Relative shot noise level:	1.12e-08 Hz ^{-1/2}	1.15e-08 Hz ^{-1/2}

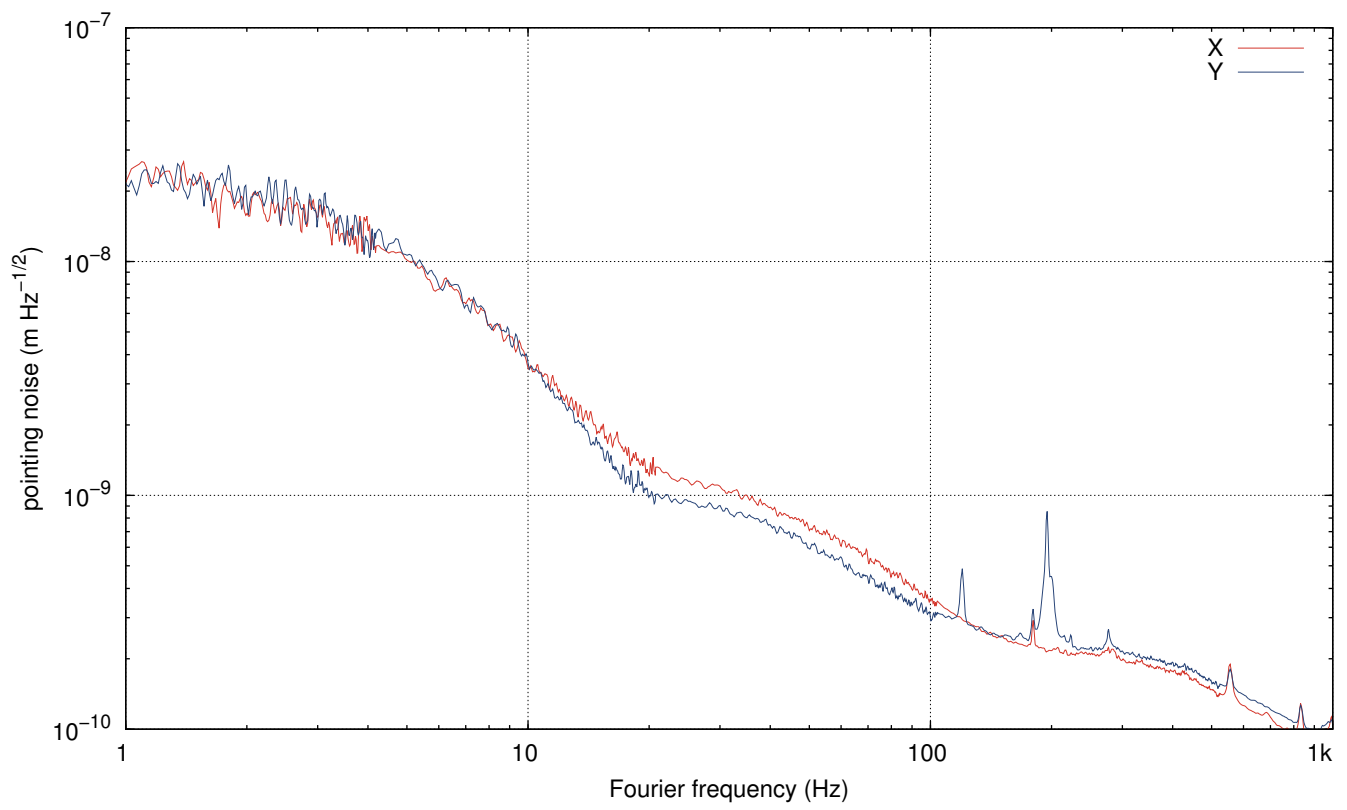

POSITION FLUCTUATIONS	
X position:	$8.629 \pm 0.064 \mu\text{m}$, $8.354 \mu\text{m} \dots 8.867 \mu\text{m}$
Y position:	$-11.448 \pm 0.055 \mu\text{m}$, $-11.706 \mu\text{m} \dots -11.212 \mu\text{m}$
Samplingrate:	32768 Hz, 32768 Hz

D A Q	
Measurement duration:	600 s = 10.0 min
Measurement start:	29. Jul 2016 08:50 PDT (29. Jul 2016 15:50 UTC, 1153842665 GPS)
NDS:	h1nds1:8088 (v12r2)
User:	edmond.merilh@opsws6
Channels:	H1:PSL-ISS_PDA_OUT 32768 Hz, H1:PSL-ISS_PDB_OUT 32768 Hz, H1:PSL-ISS_DIFFRACTION_OUT 32768 Hz, H1:PSL-ISS_QPD_DX_OUT 32768 Hz, H1:PSL-ISS_QPD_DY_OUT 32768 Hz, H1:PSL-ISS_LOOP_STATE_OUTPUT 16 Hz, H1:PSL-ISS_REFSIGNAL_MON_OUTPUT 16 Hz, H1:PSL-ISS_GAIN 16 Hz, H1:PSL-ISS_SECONDDLOOP_CLOSED 16 Hz, H1:PSL-ISS_SAT_MIN 16 Hz, H1:PSL-ISS_SAT_HOUR 16 Hz, H1:PSL-ISS_SAT_DAY 16 Hz
Raw data:	rawdata.zip (attached to this .pdf file, use Adobe Reader)
Calibration:	default.cali (embedded), 01. Jan 1970 00:00 UTC
Report source files:	report.zip (attached to this .pdf file, use Adobe Reader)
Program:	iss_rpn.py v0.7, Patrick Kwee, patrick.kwee@aei.mpg.de

I N F O	
Measurement method: The power noise downstream of the PMC is measured with two low-noise 2 mm InGaAs photodetectors. One of the photodetectors is used as sensor in the ISS first feedback control loop. The signal to the AOM driver is used to estimate the free-running power noise of the laser system.	
<i>no comment</i>	