


Improvement with dither reduction for upconversion region of acoustic injections (4100 - injection f) , BLACK: no injection, RED: nominal 6000 dither, BLUE: 750 dither

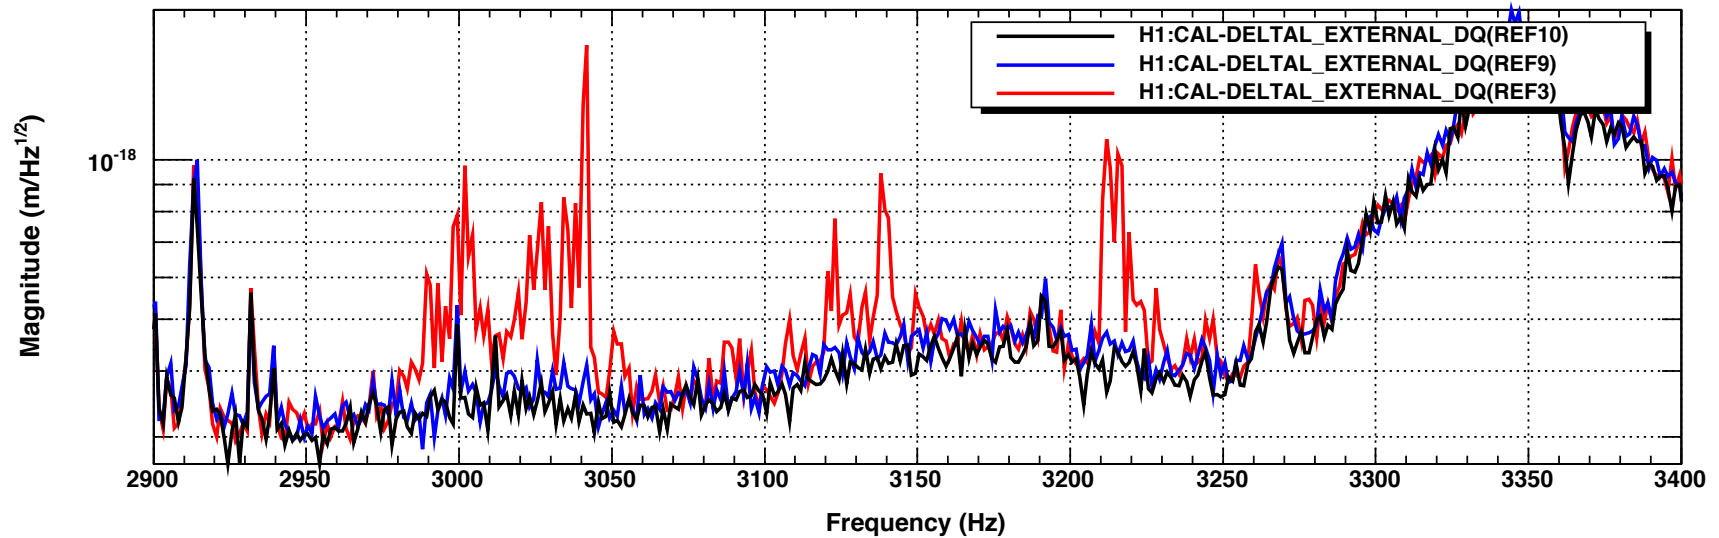


*T0=05/10/2016 02:55:20

*Avg=10/Bin=20

BW=0.0937422

X-manifold acoustic injection, same color scheme as above

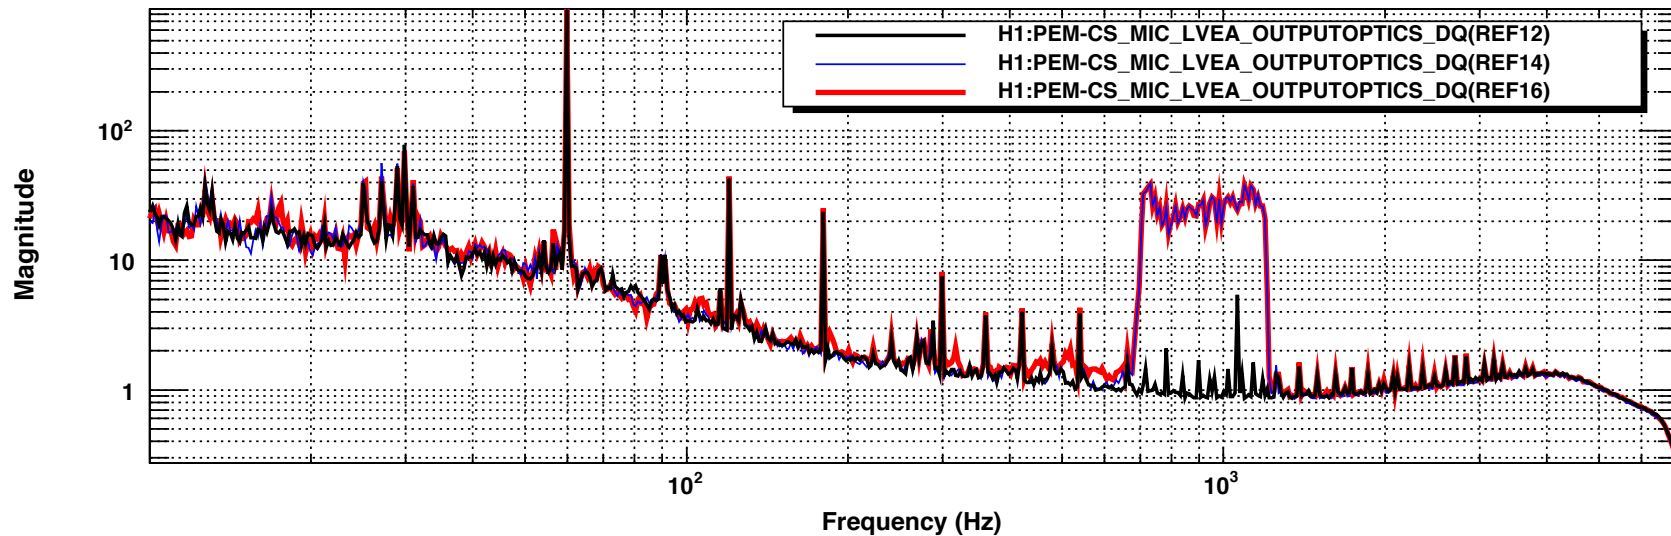

*T0=05/10/2016 02:02:14

*Avg=1/Bin=100L

BW=0.0937422