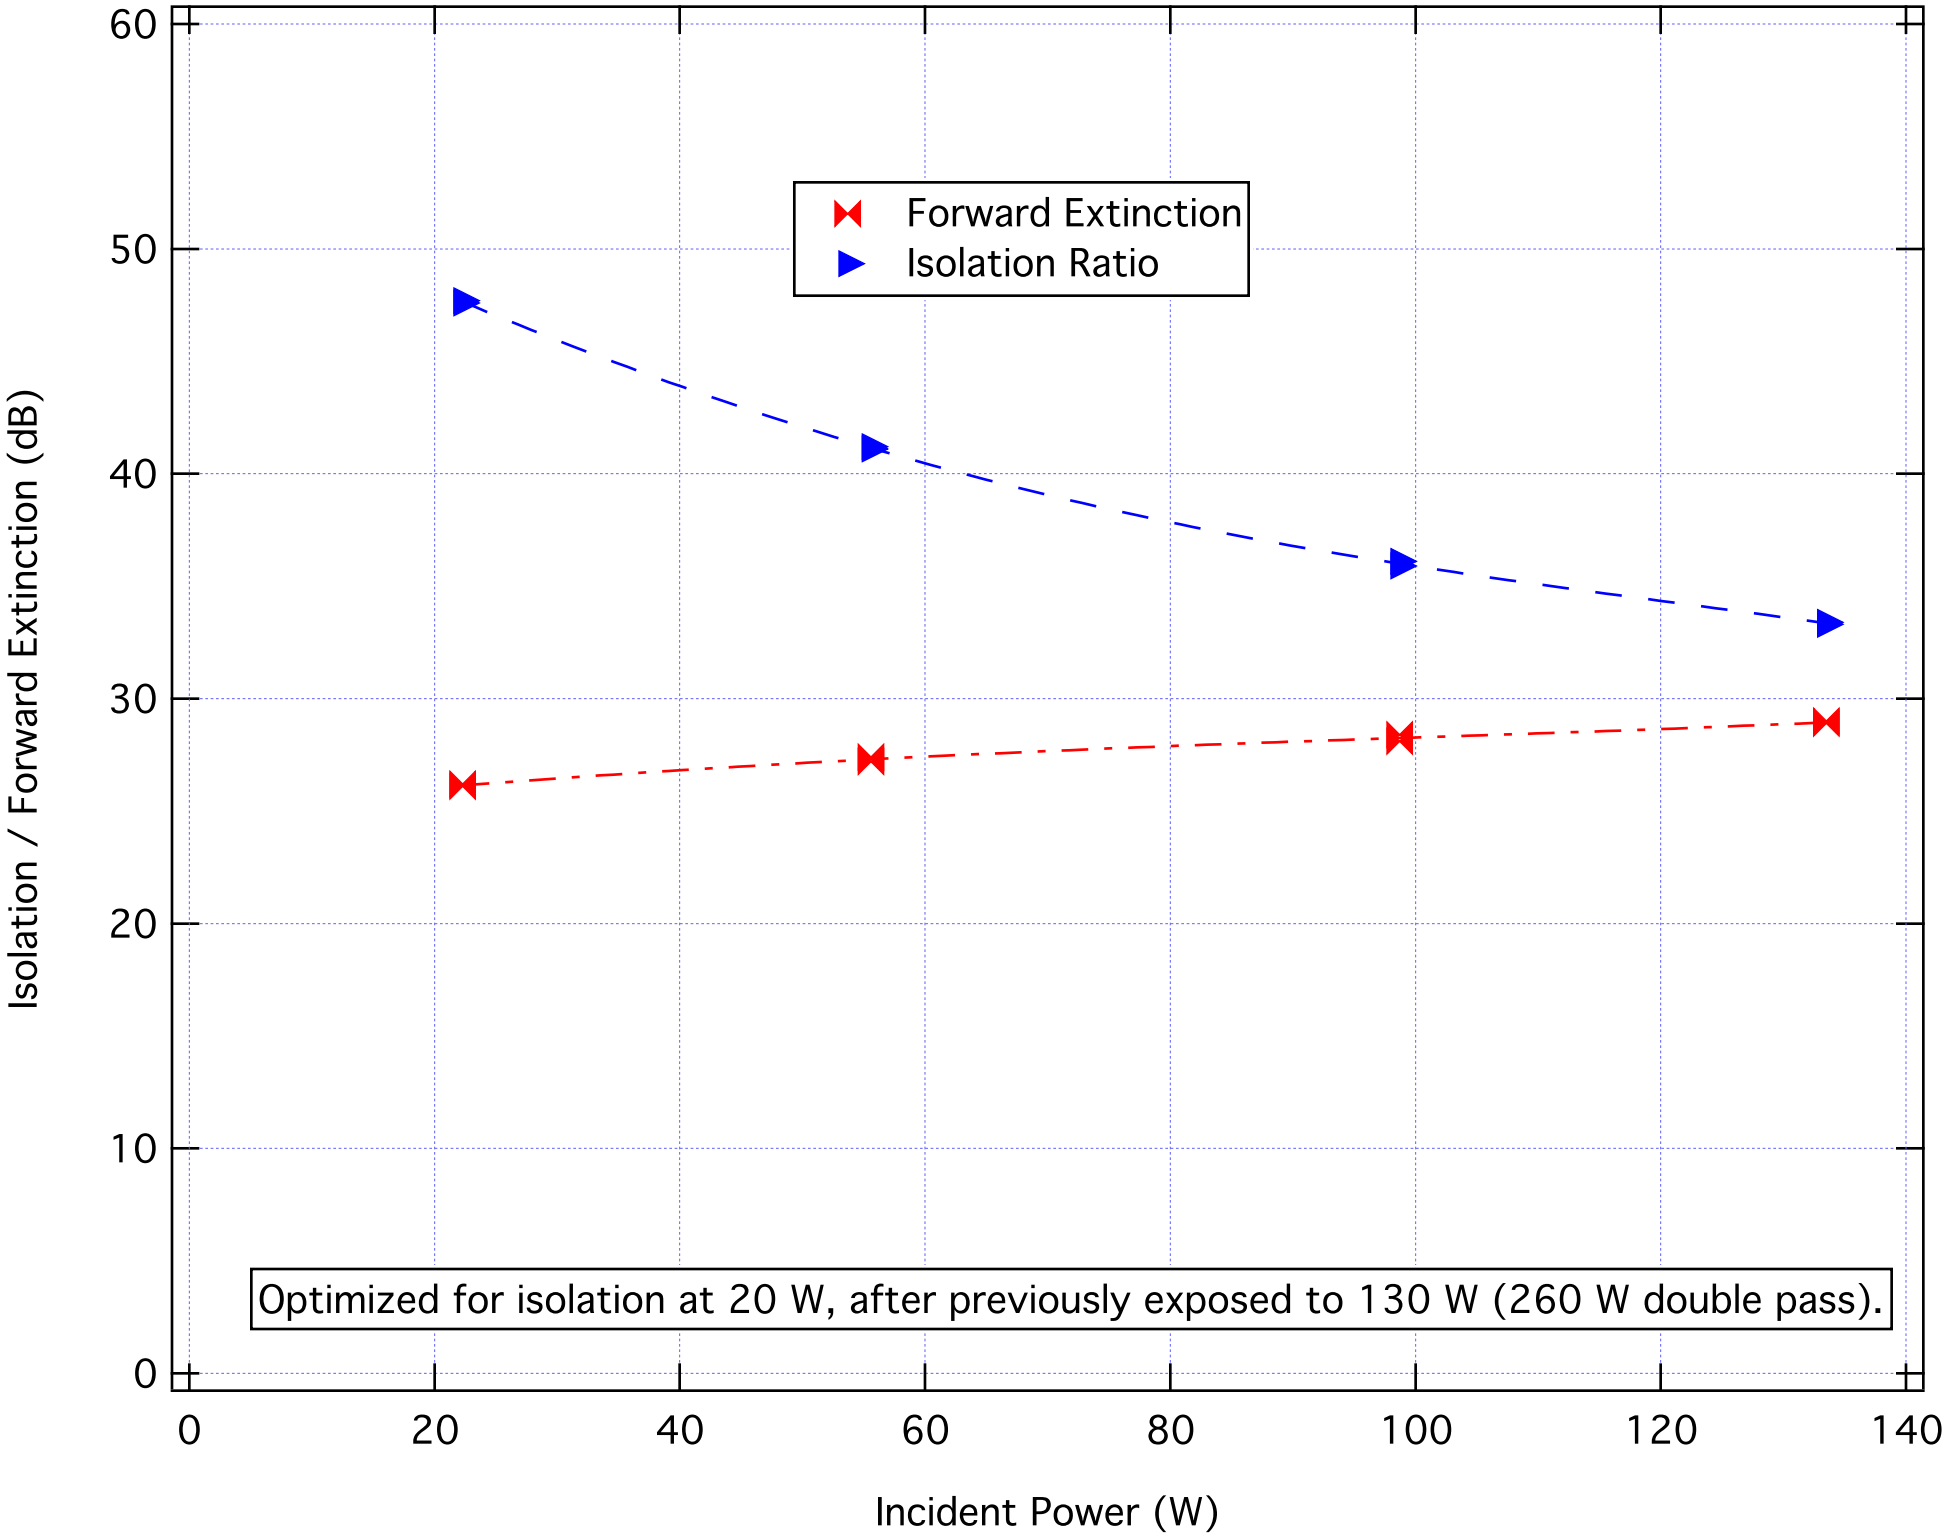
Forward Extinction
Isolation Ratio
Optimized for isolation at 20 W, after previously exposed to 130 W (260 W double pass).
Isolation / Forward Extinction (dB)
Incident Power (W)
0
10
20
30
40
50
60
0
20
40
60
80
100
120
140