


## View from illuminator port on HAM3 measurements on next page

PR2 suspension

Reflection of PR2  
suspension in far side  
of scraper baffle

Source of stray beam  
partially hidden behind  
scraper baffle to avoid  
camera saturation.  
Note how close it is to  
where the reflection of  
the PR2 beamspot  
should be.

Different ghost beam hitting  
baffle

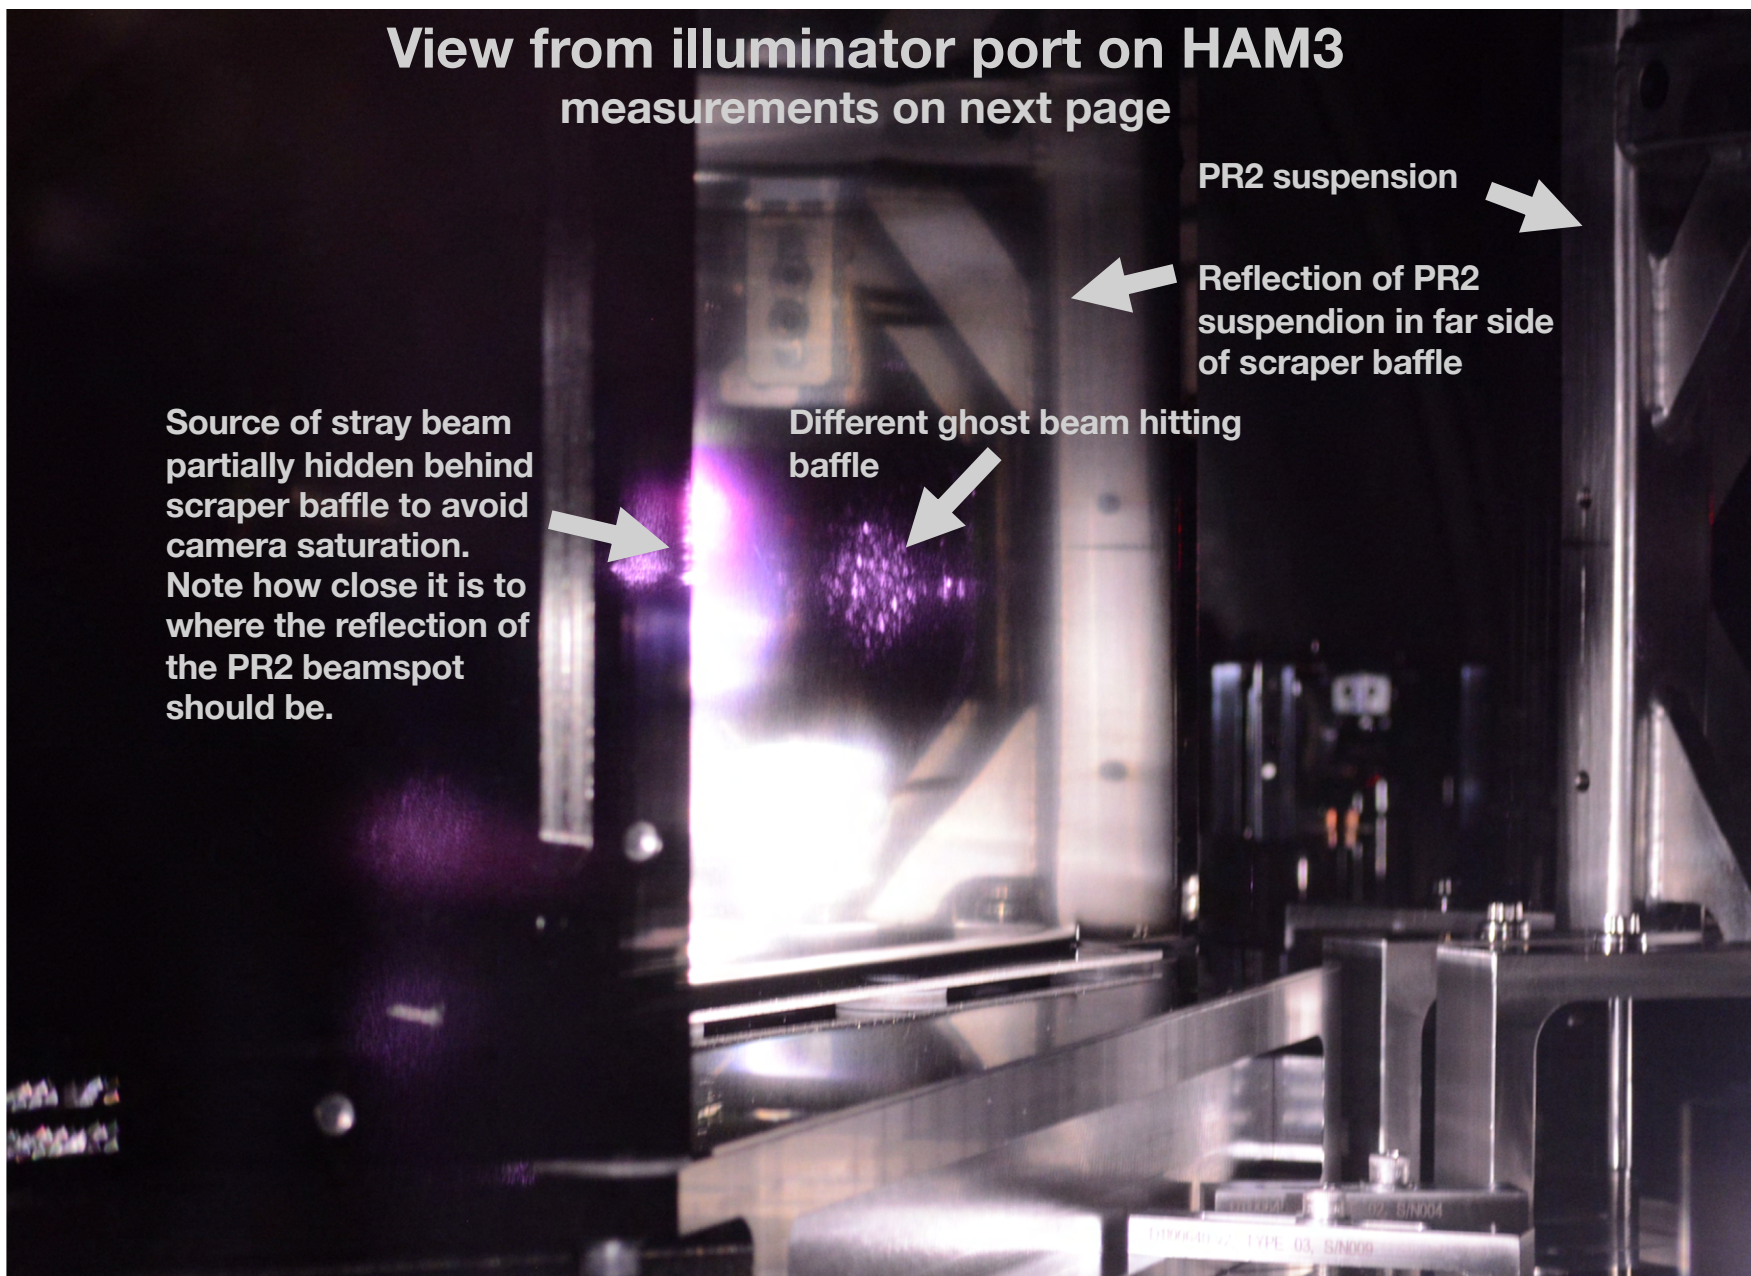

**Stray beam at illuminator  
viewport (-Y,-X) on HAM3.**



**Part of the  
elongated beam  
measured 19.41  
mW.**

