


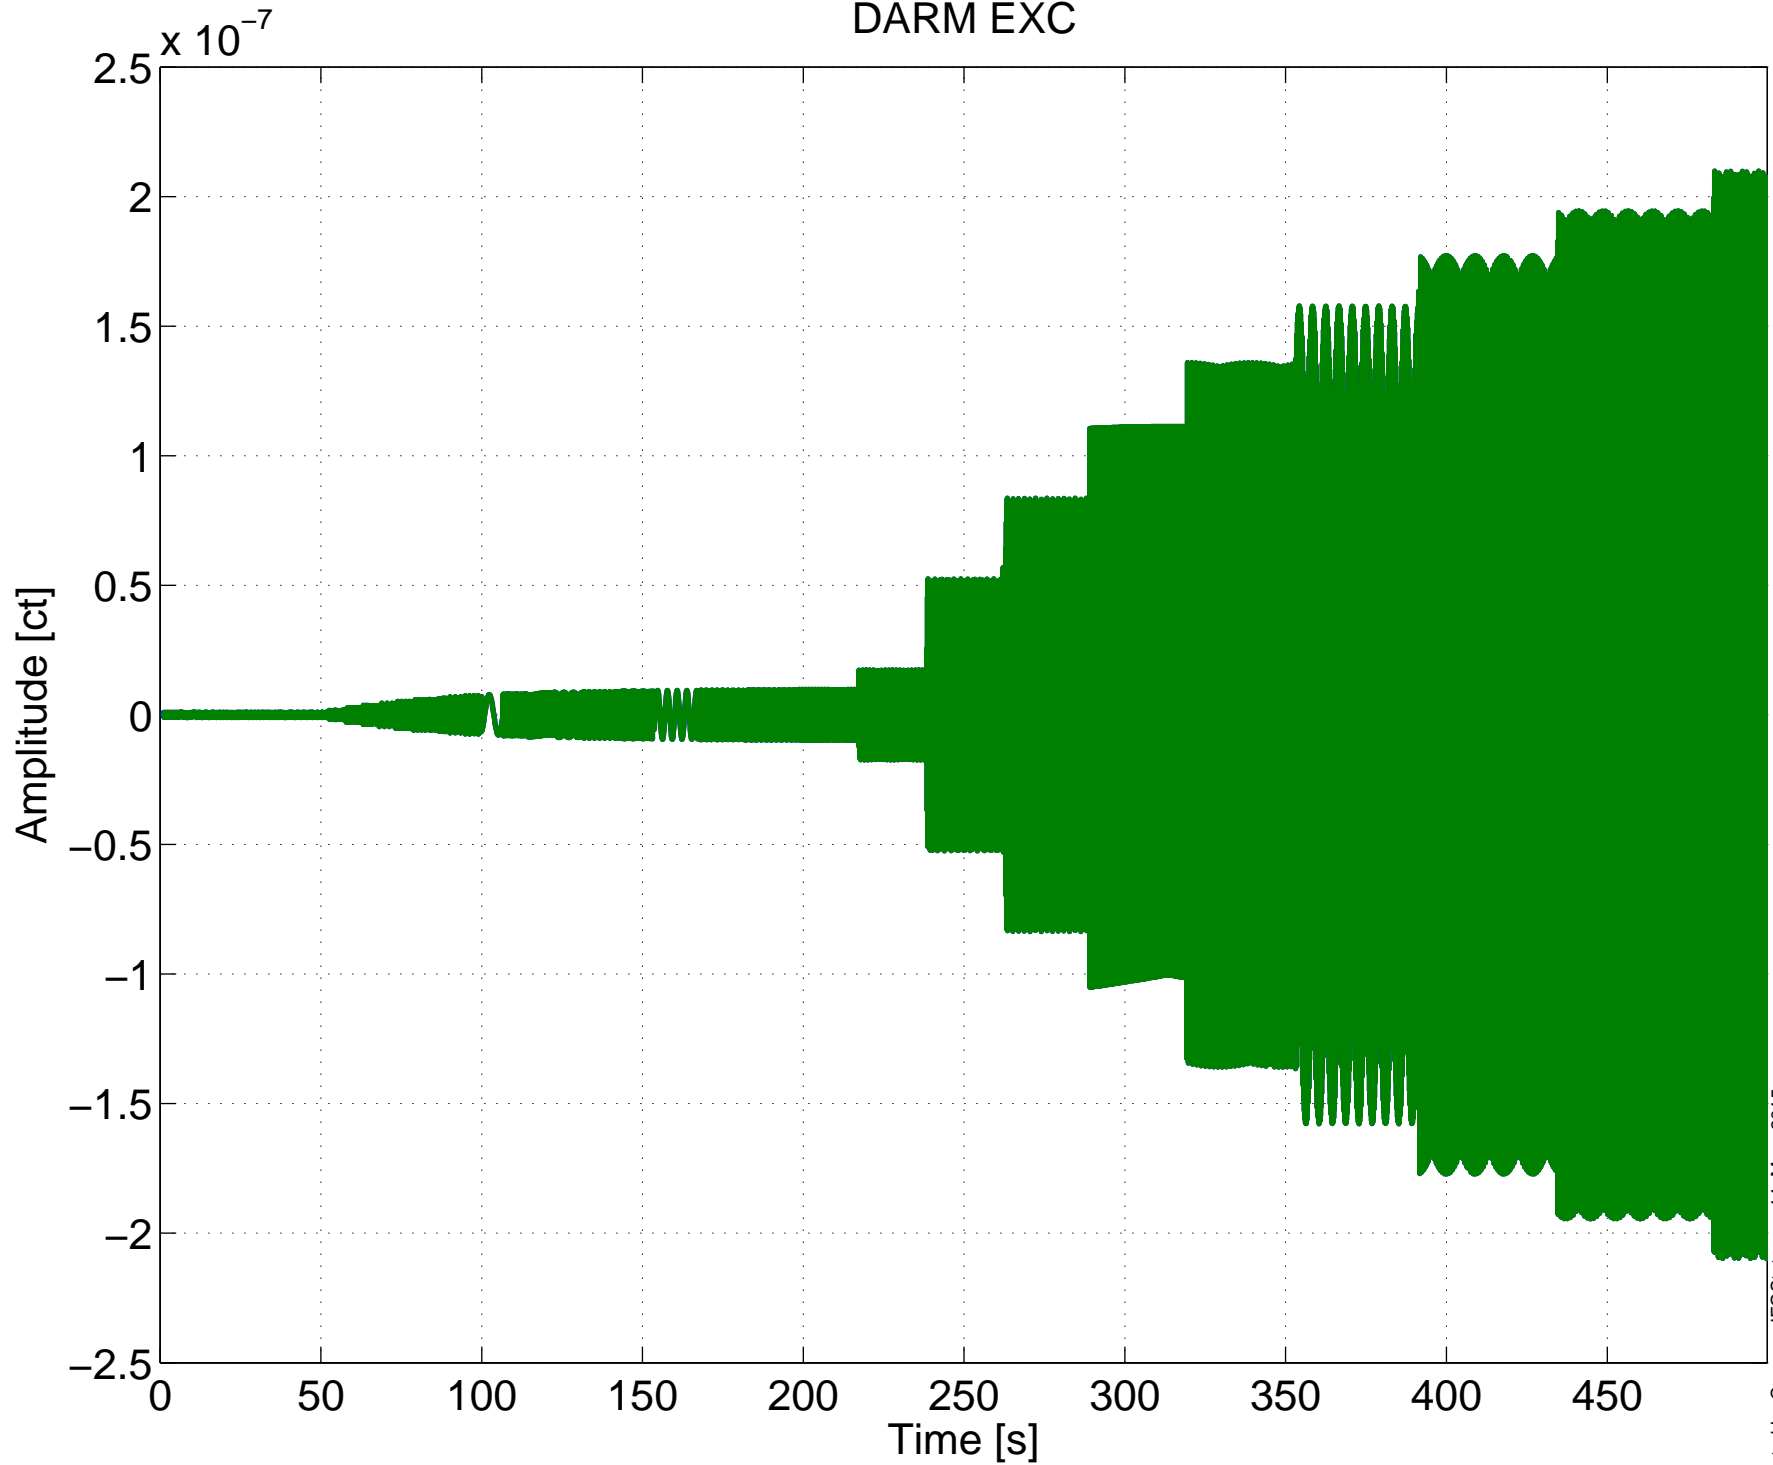
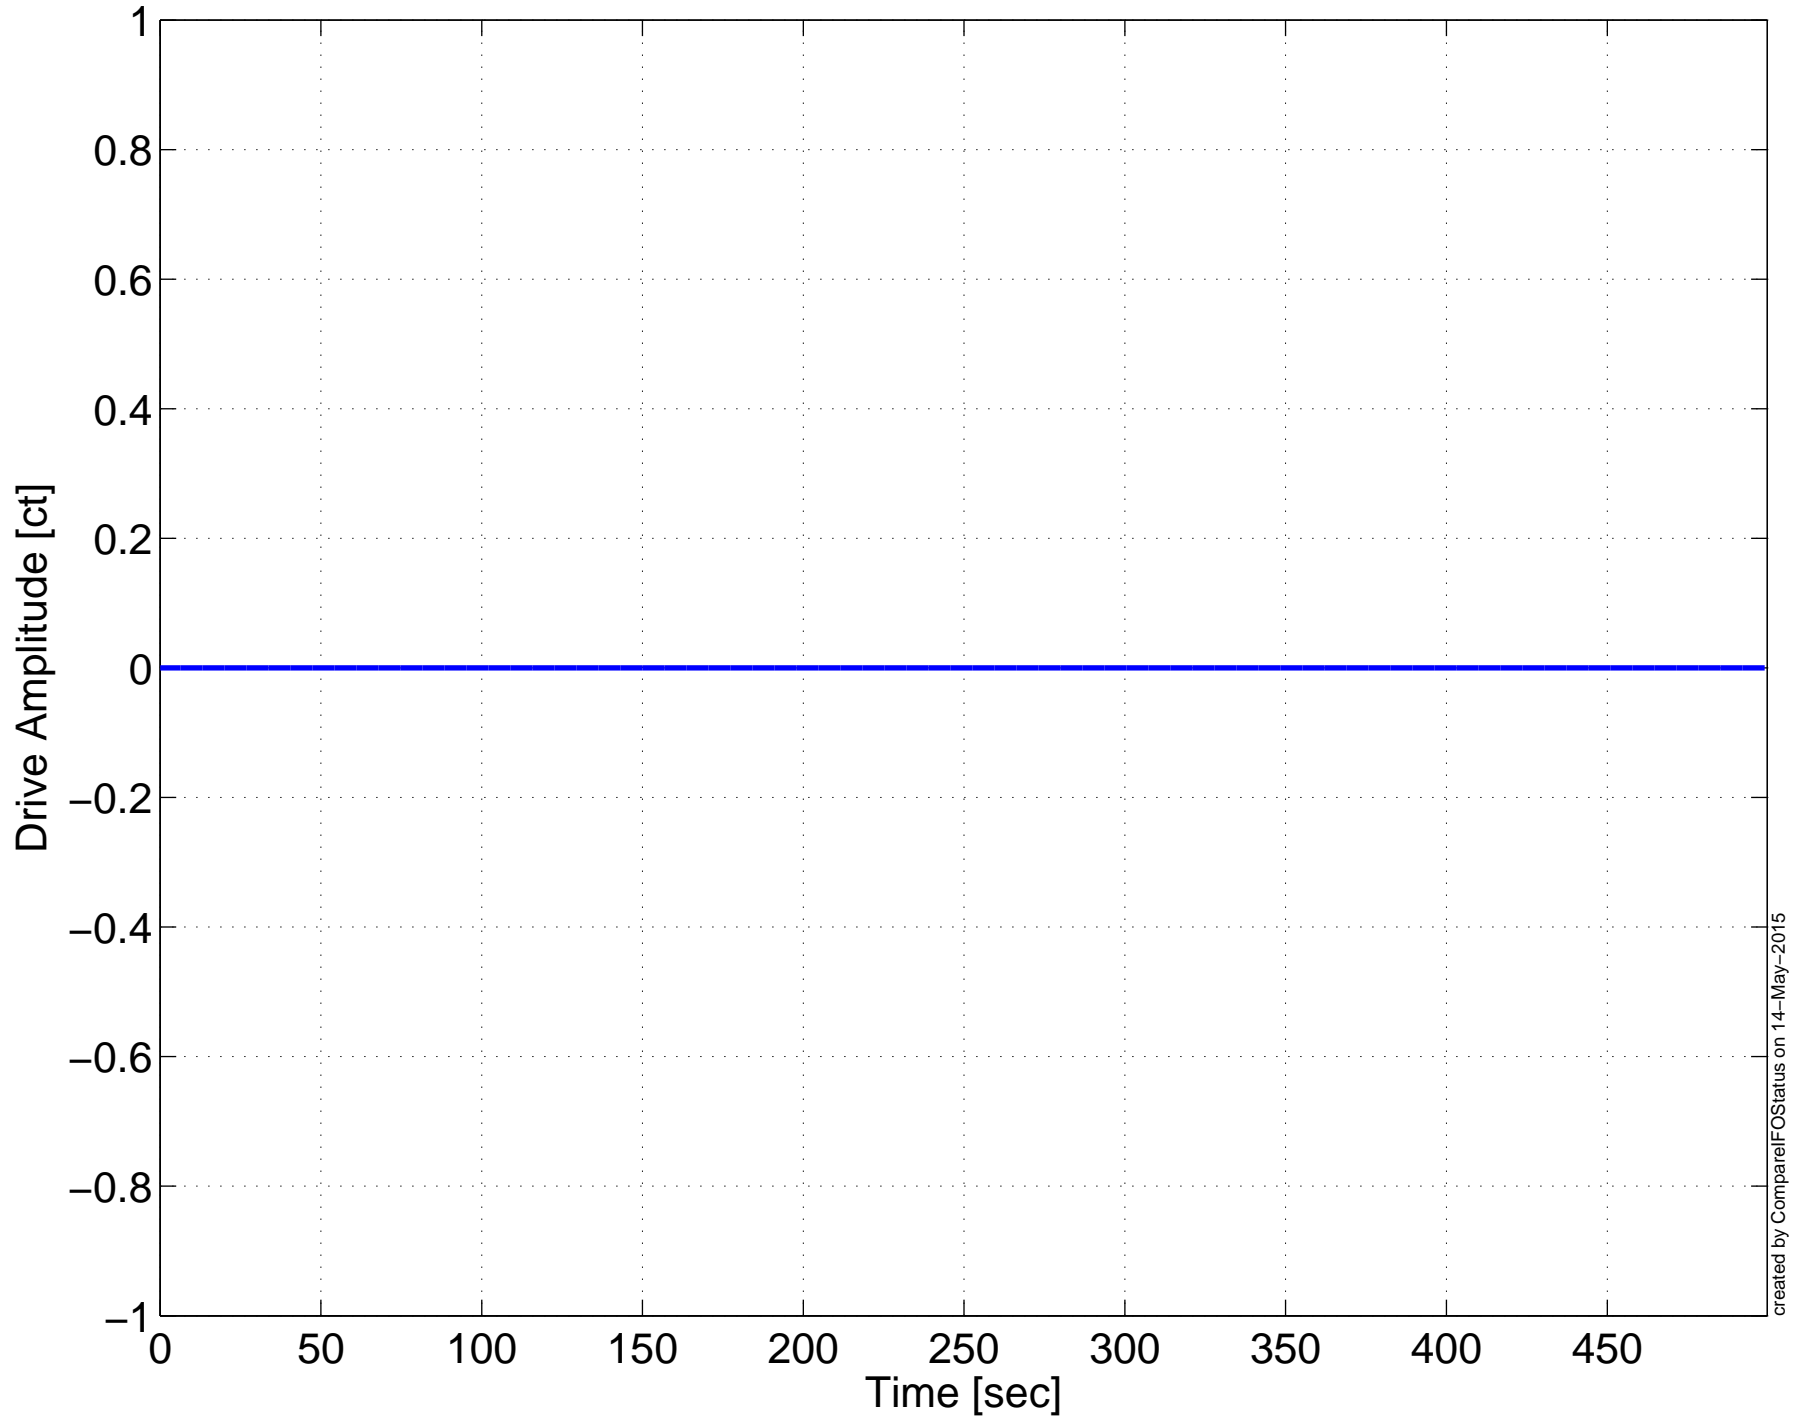
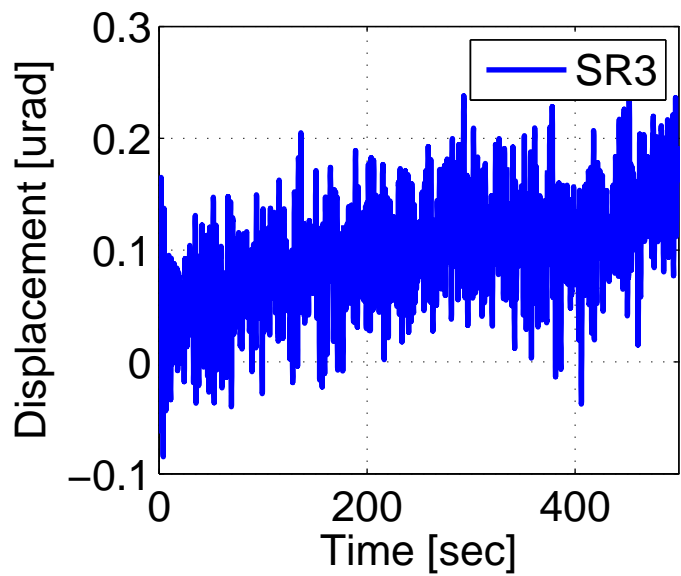
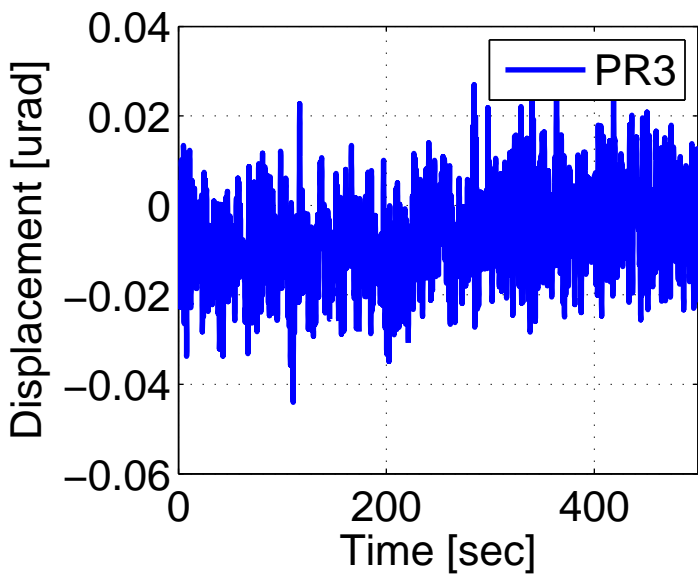
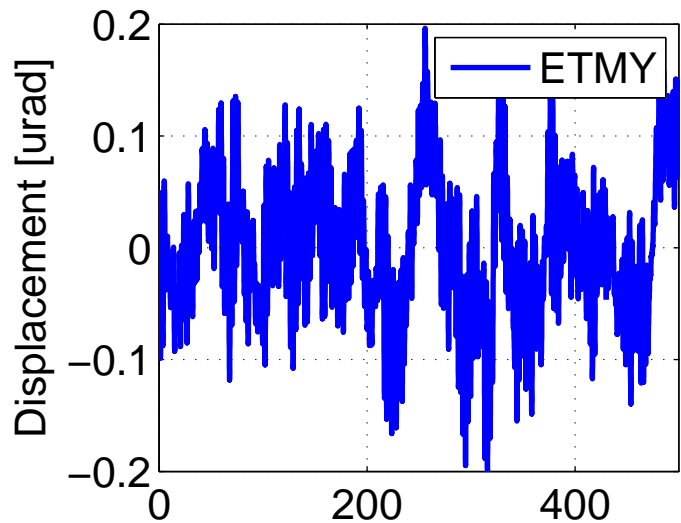


H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
DARM EXC

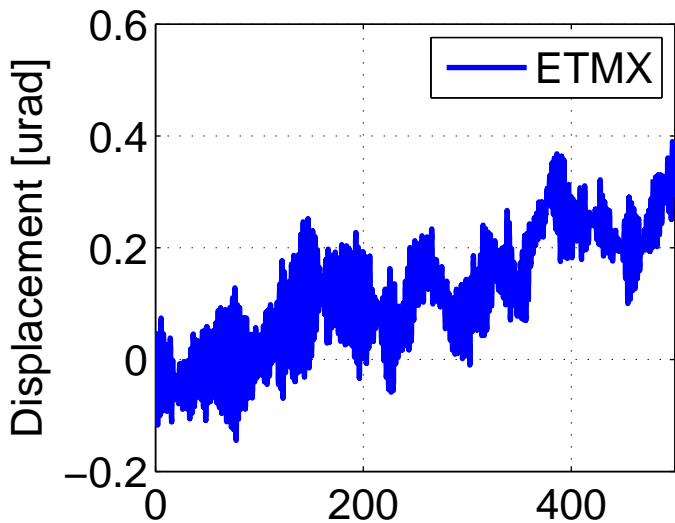








H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
Diff. SOFT (ITMX) Control Signal

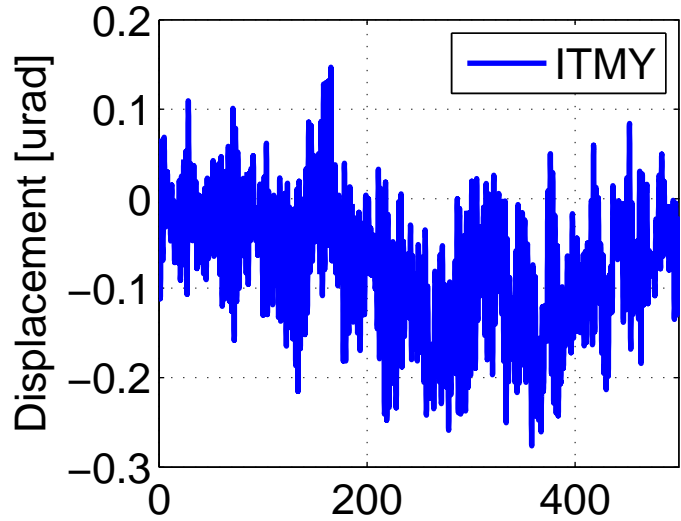

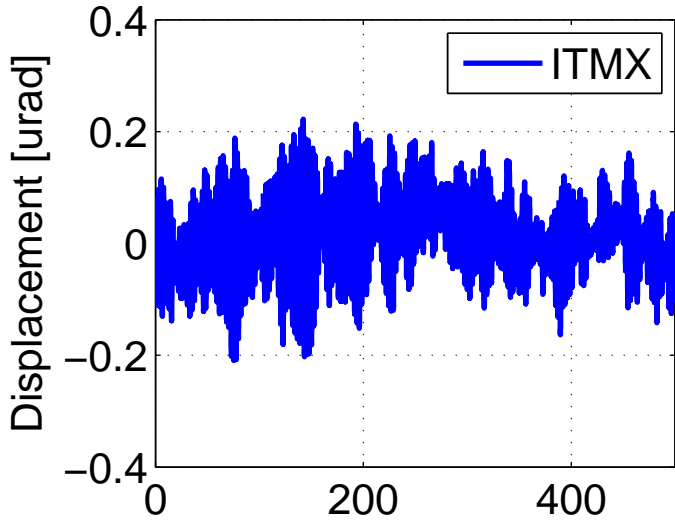


H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
Common SOFT (ITMY) Control Signal

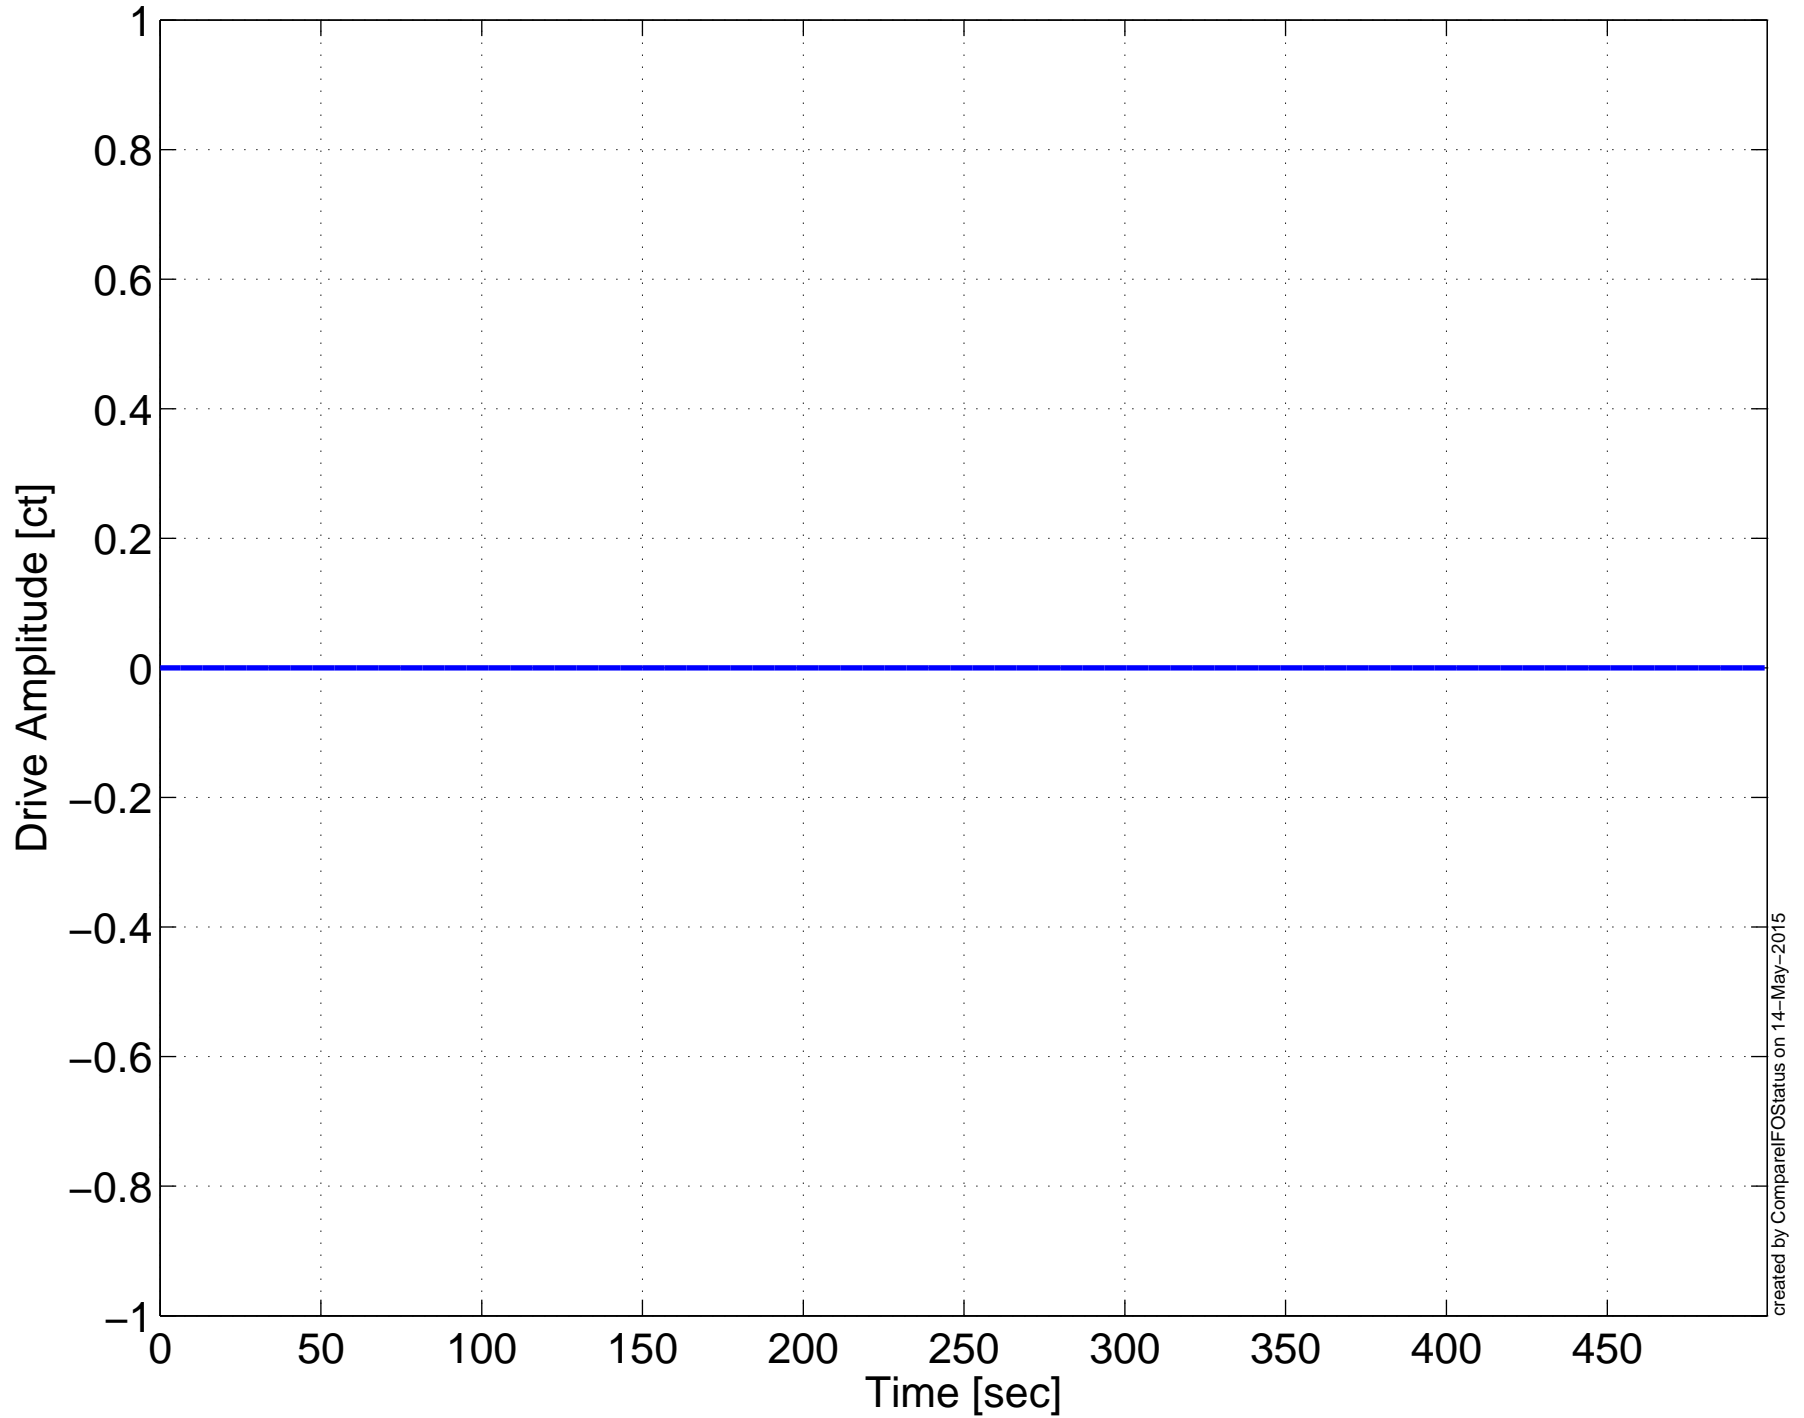


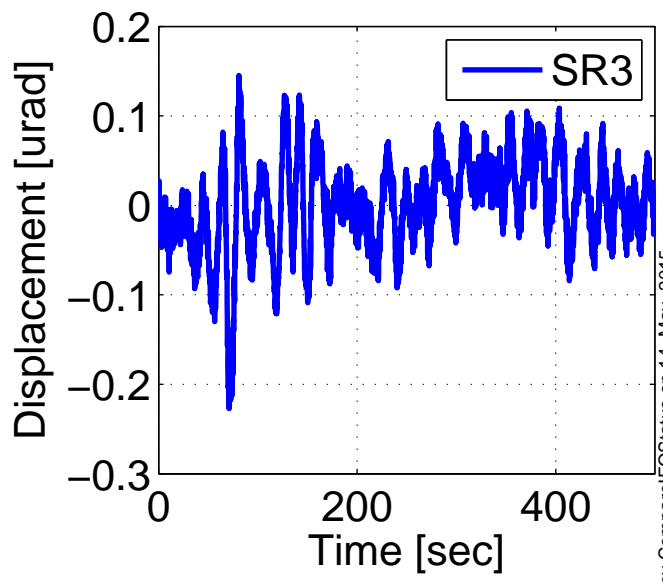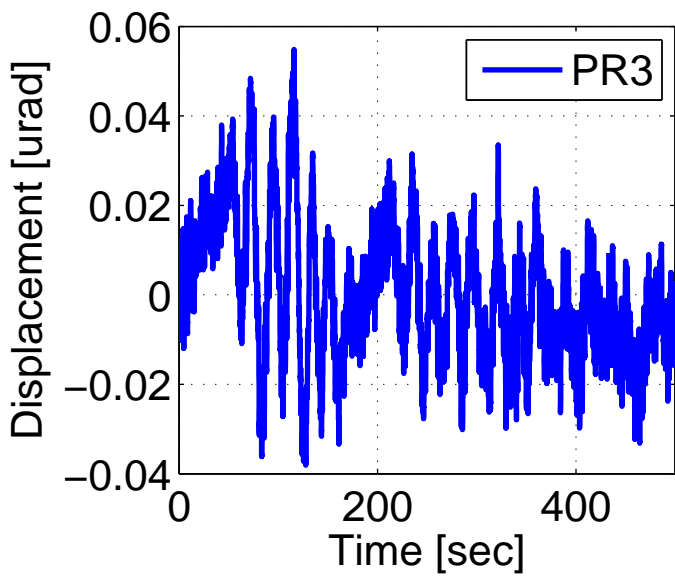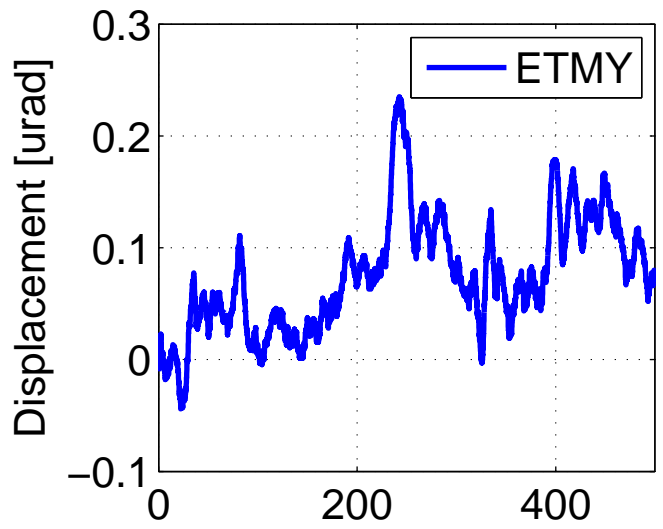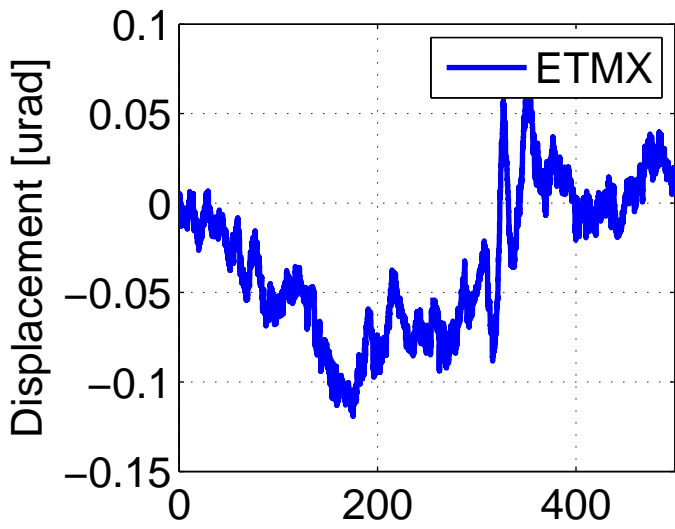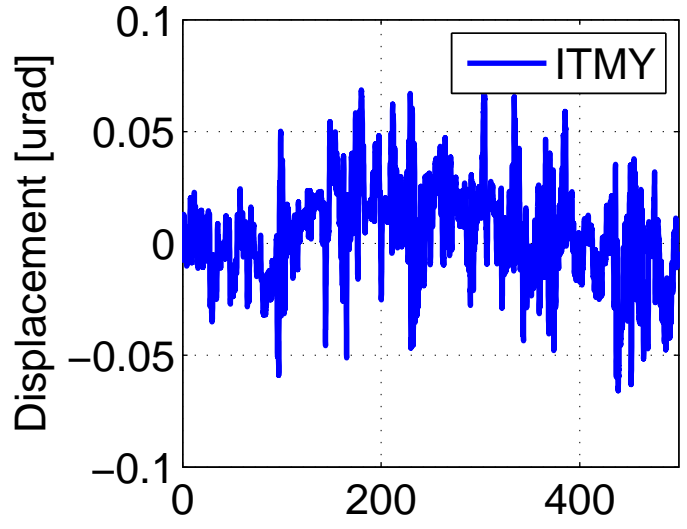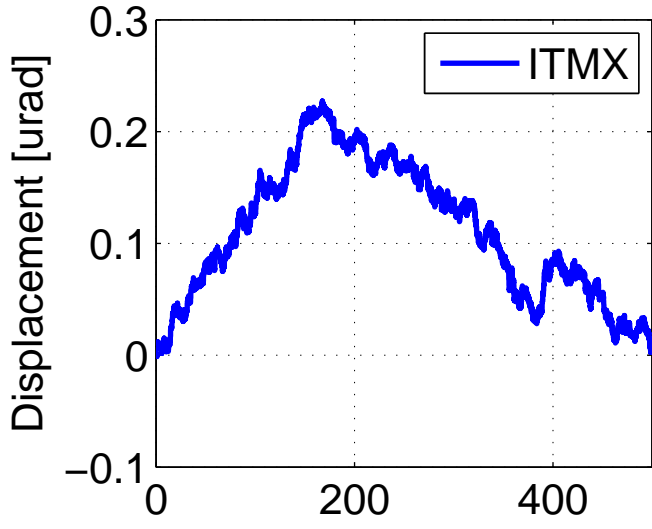


H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
TCS ITMX CO2 Laser Power

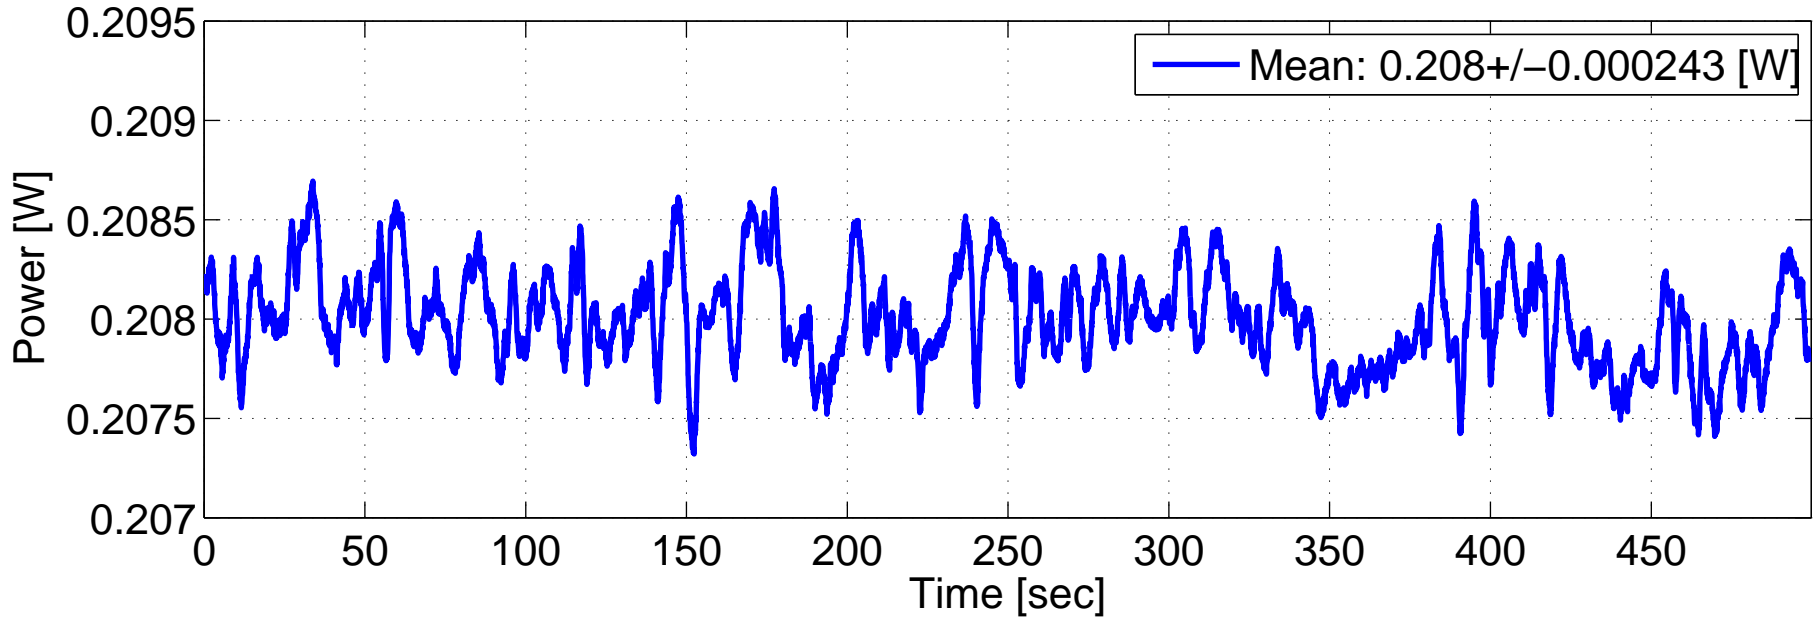


H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
TCS ETMX Ring Heater Power

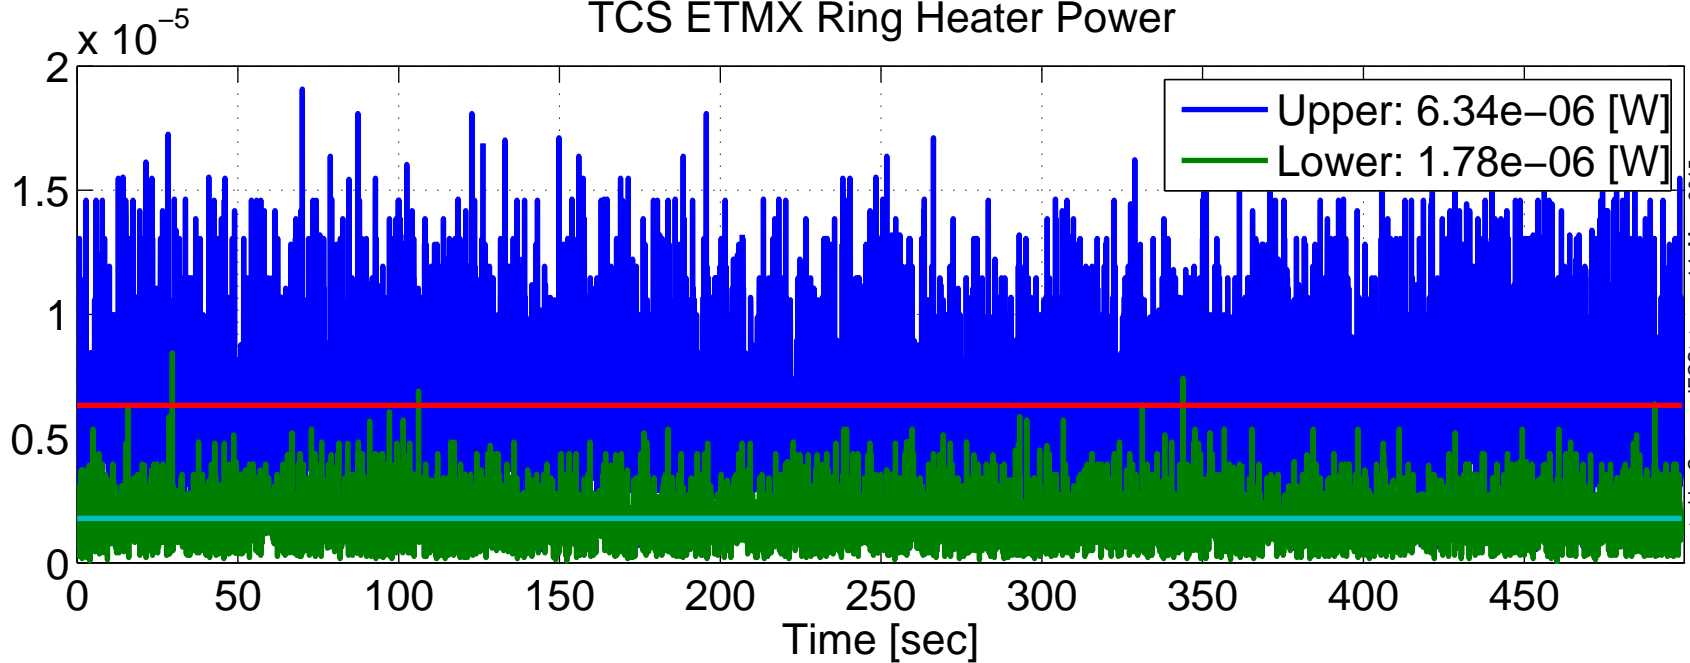


H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
Power Recycling Gain, Carrier

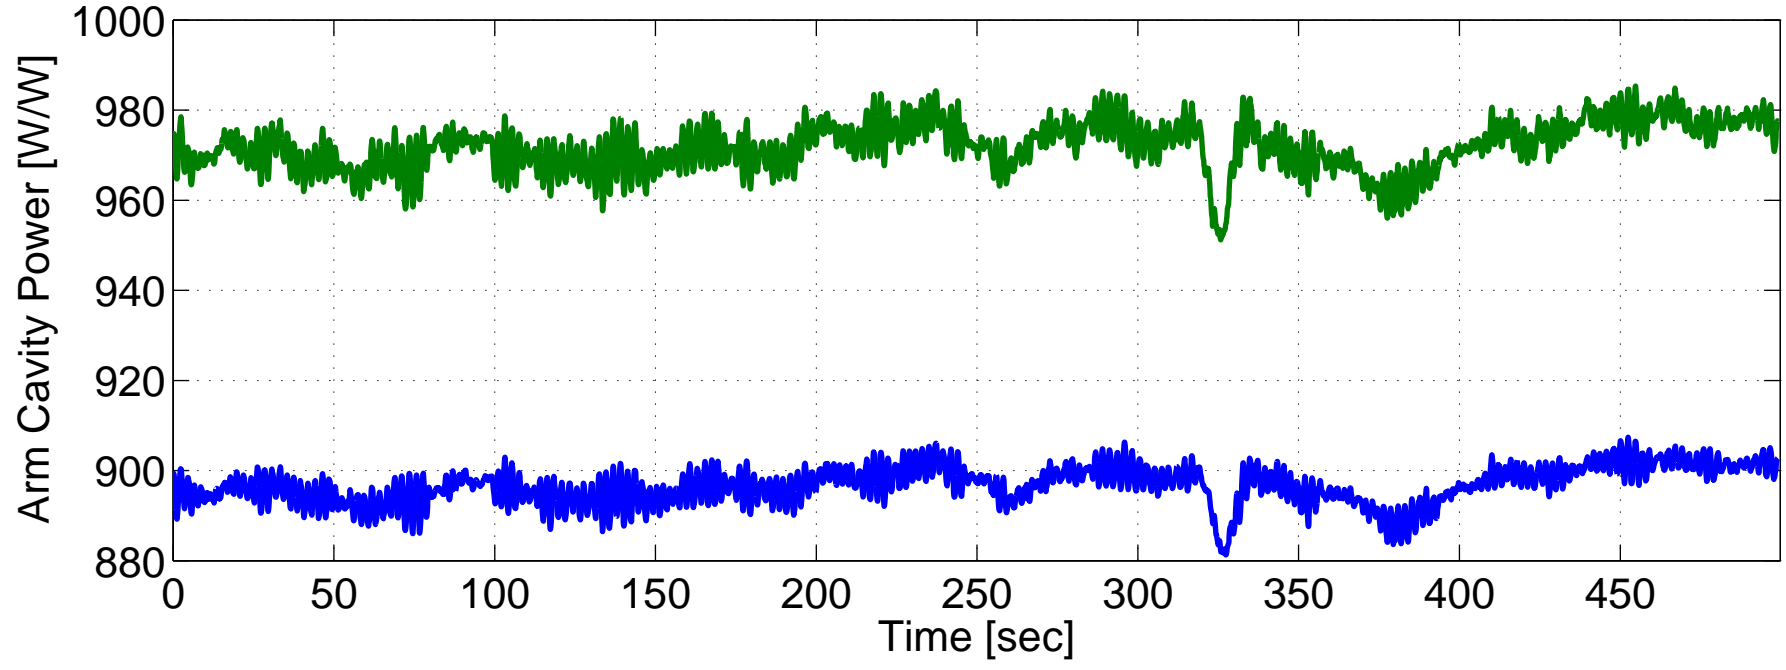


QPD Normalization Gains: [X,Y] = [0.21659,0.21872]

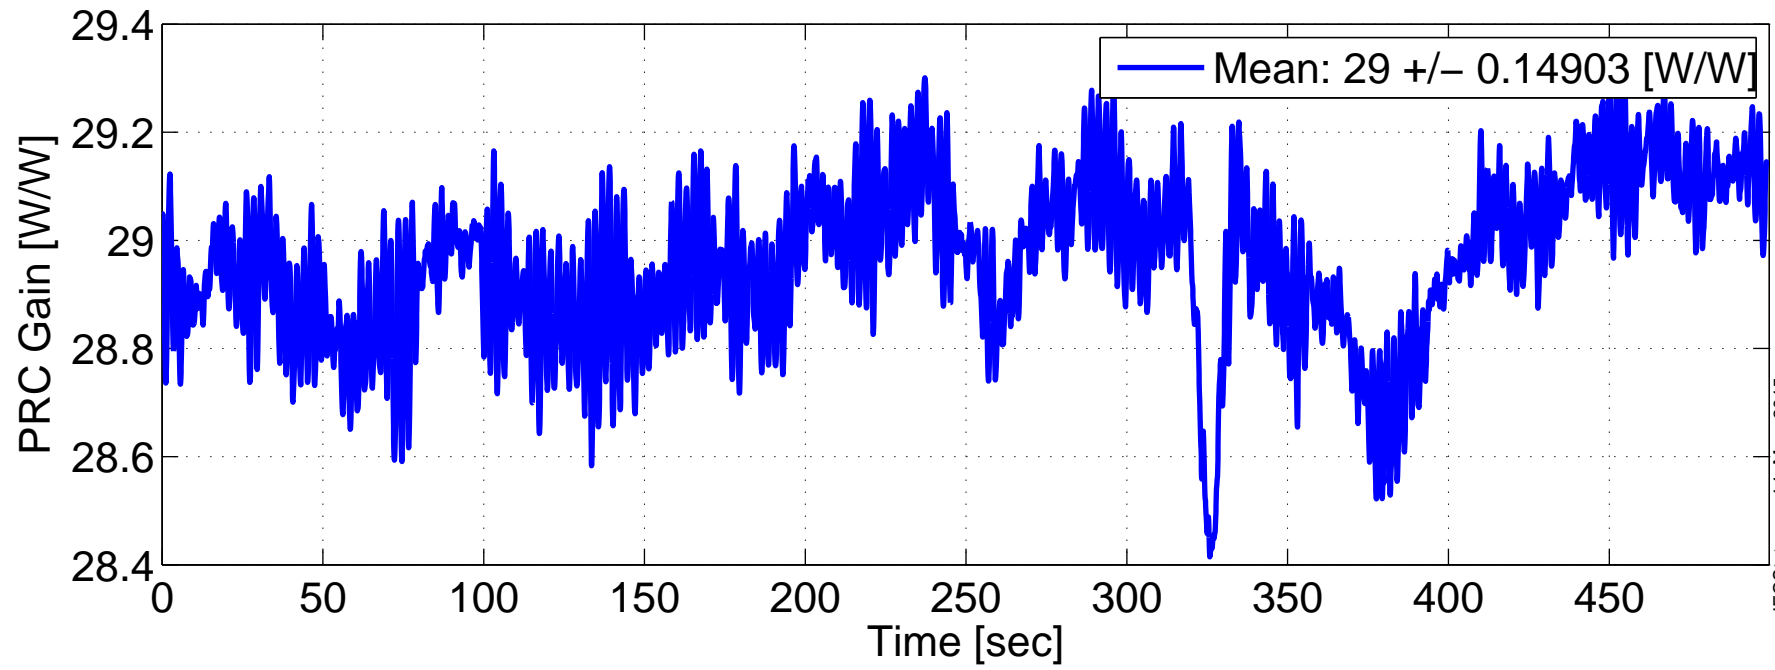


Power Into the IFO

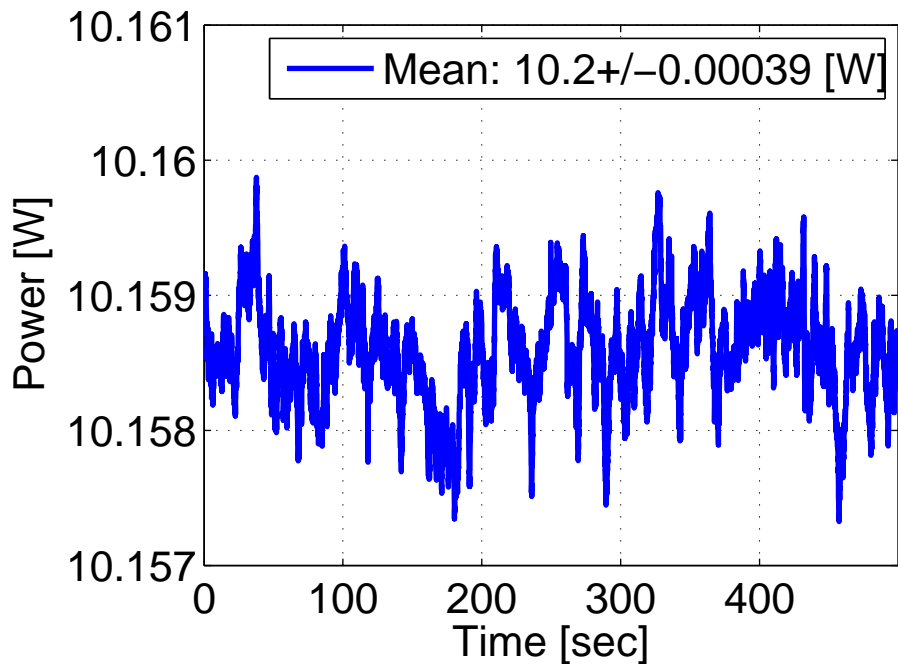


Power @ MC2 Trans

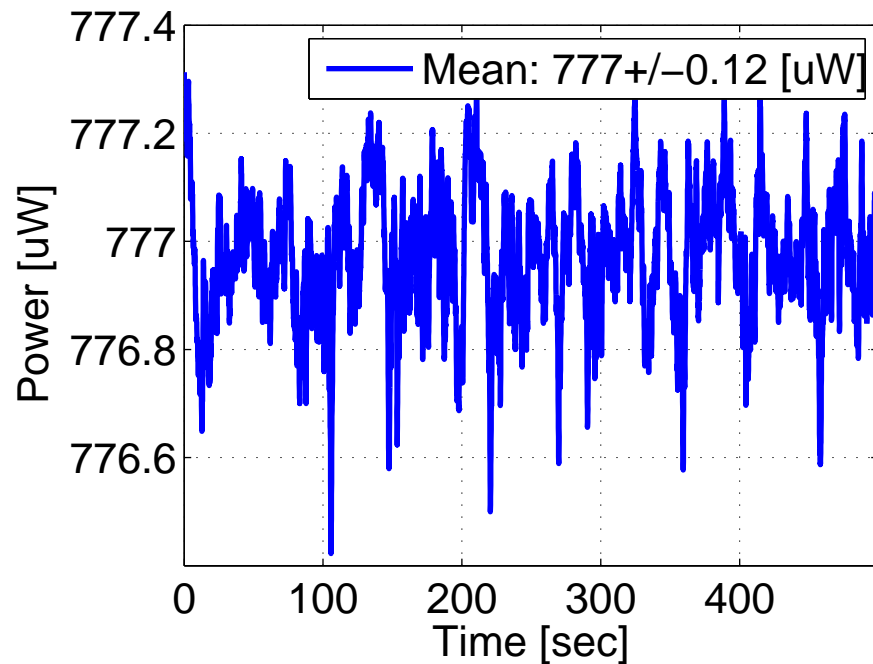


Power @ IM4 Trans

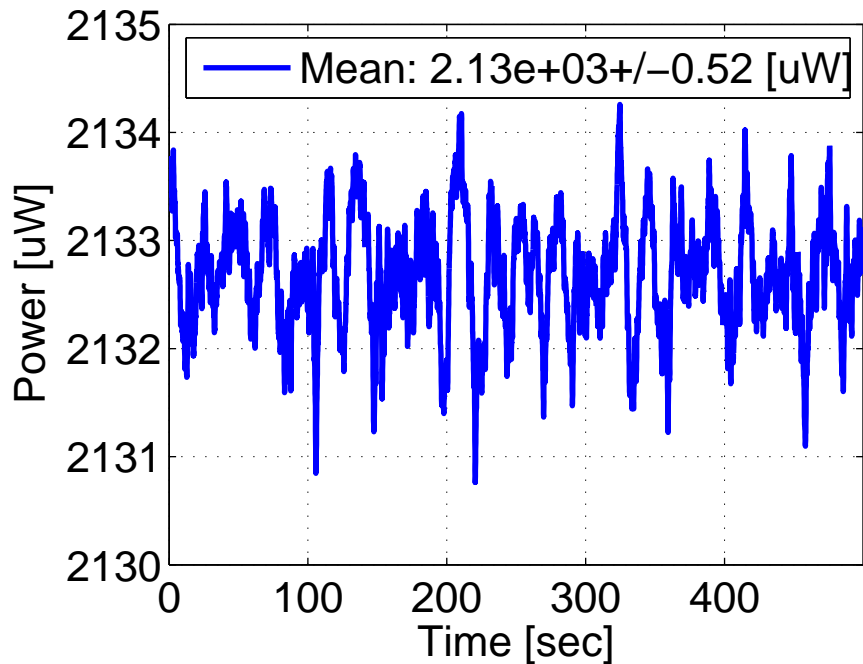


Power Scale Factor

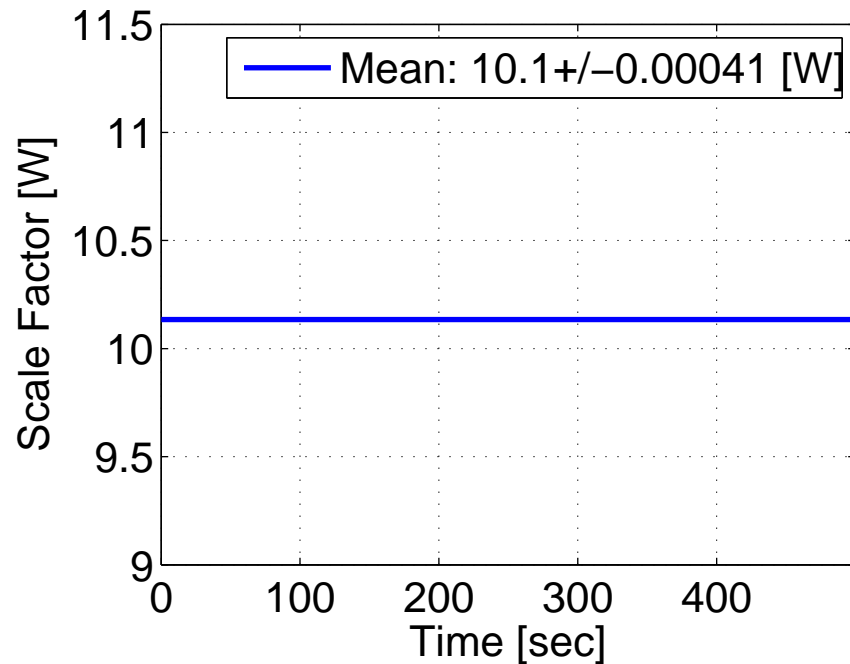


H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
Intra-Power in the IMC (Mean: 1.63 +/- 0.072 [kW])

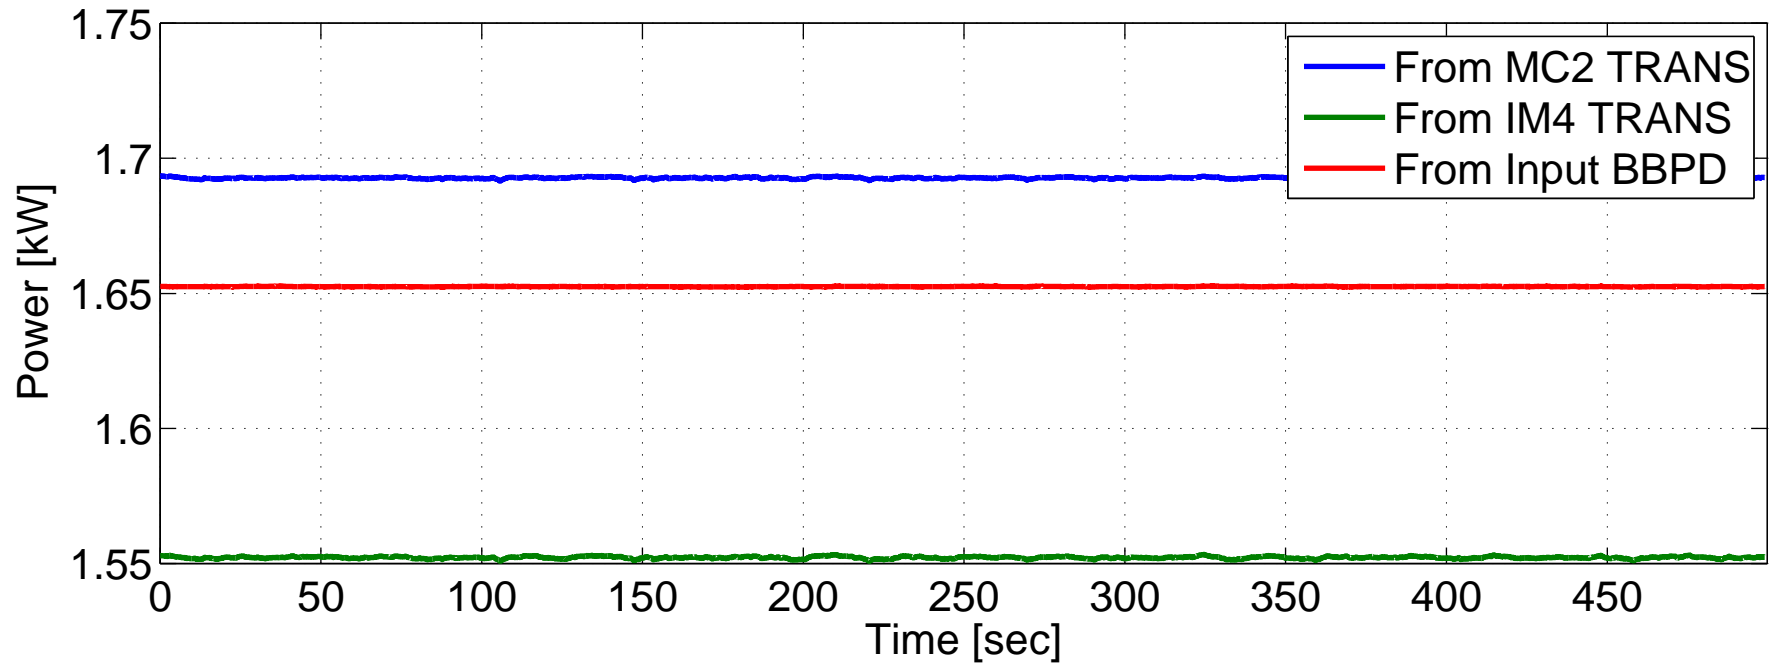


Power into PRM (Mean: 9.32 +/- 0.41 [W])

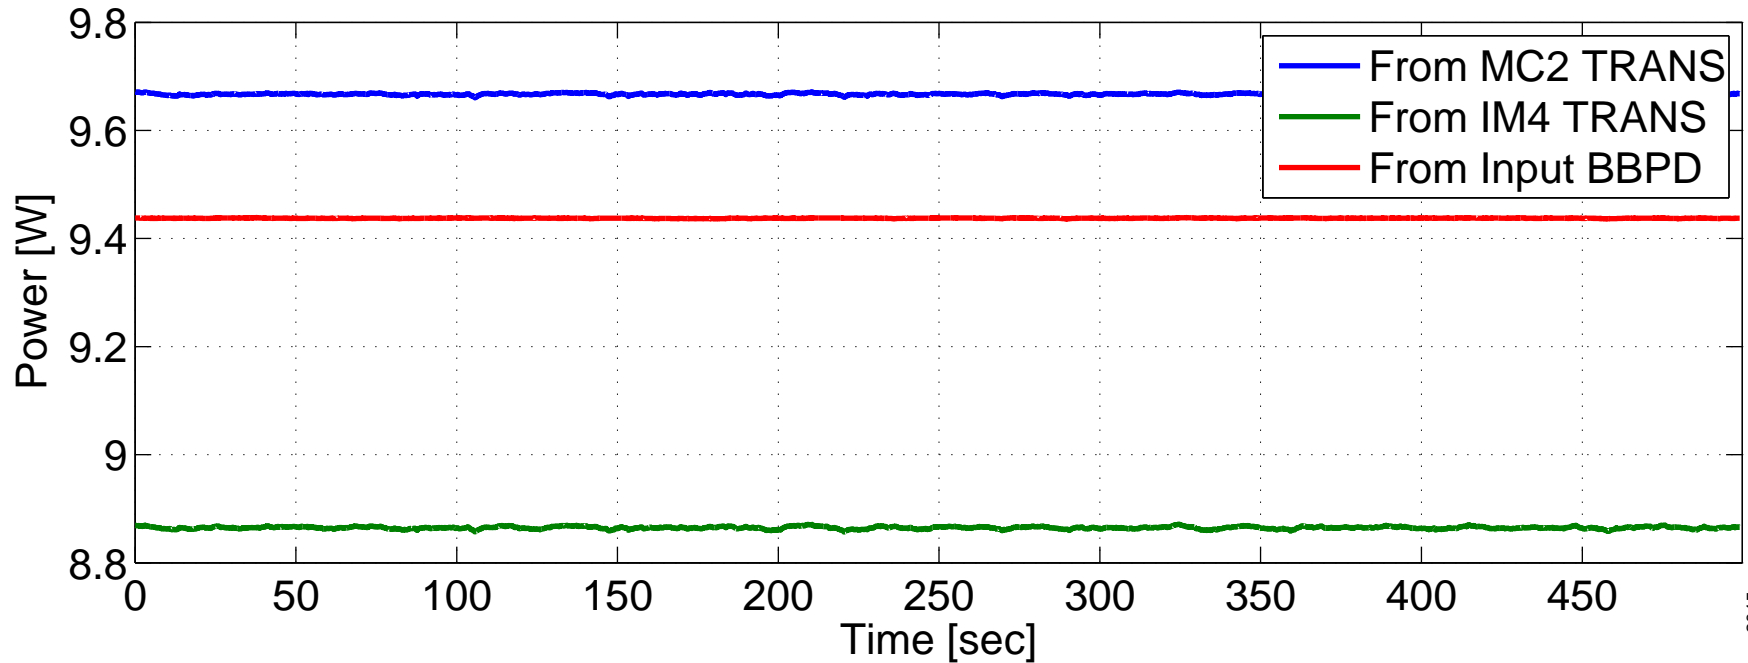


H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
POPAIR RF18 I, 9 [MHz] PRC Gain

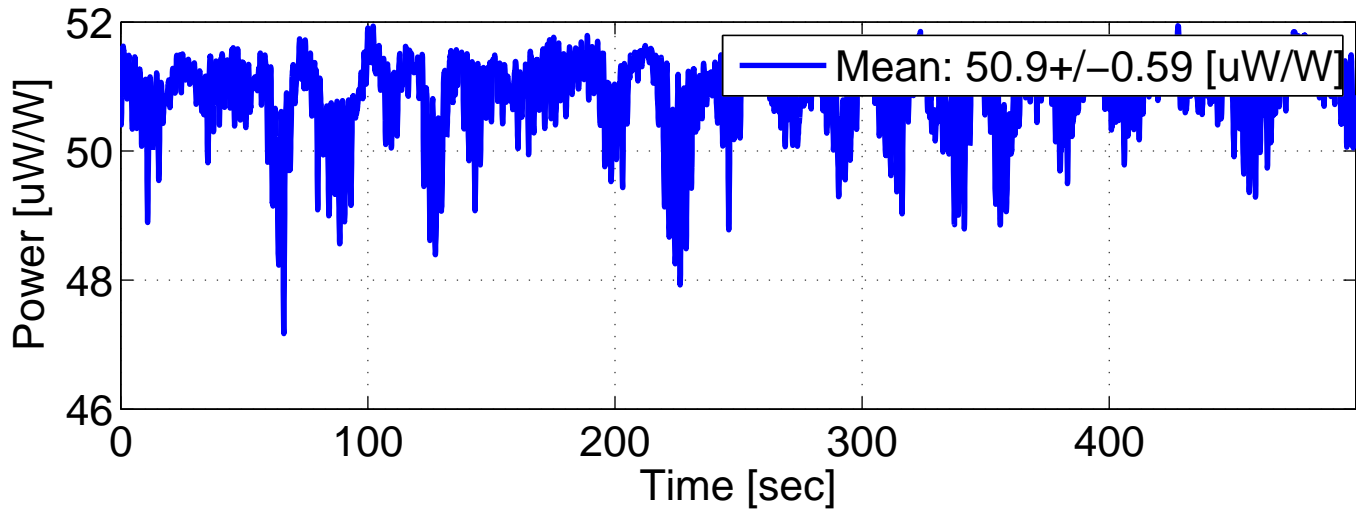


H1 DARM OLGTF, Apr 06 2015 23:45:13 UTC
POPAIR RF90 I, "SRC Reflectivity"

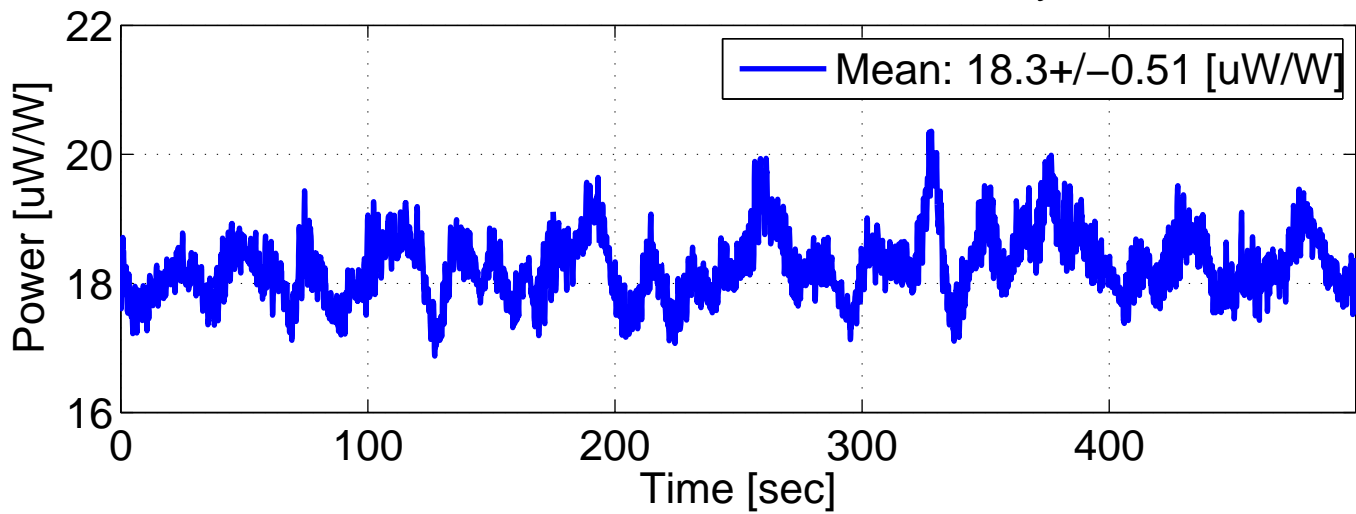

ASAIR RF90 I, "DRMI Recycling Gain"

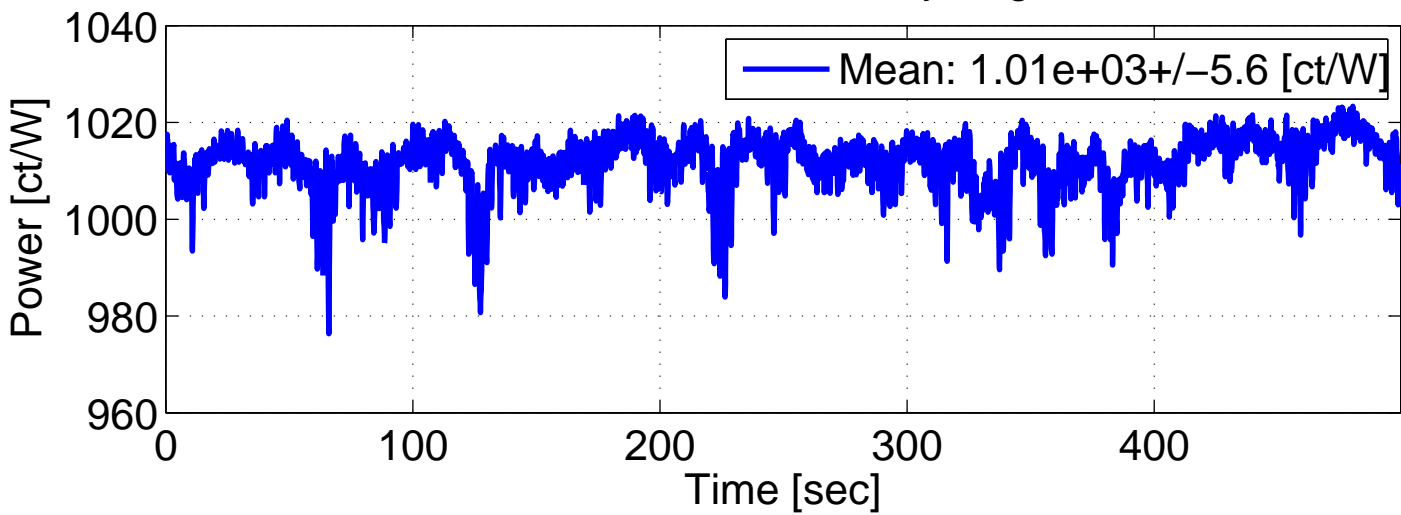

MICH Subtraction Output

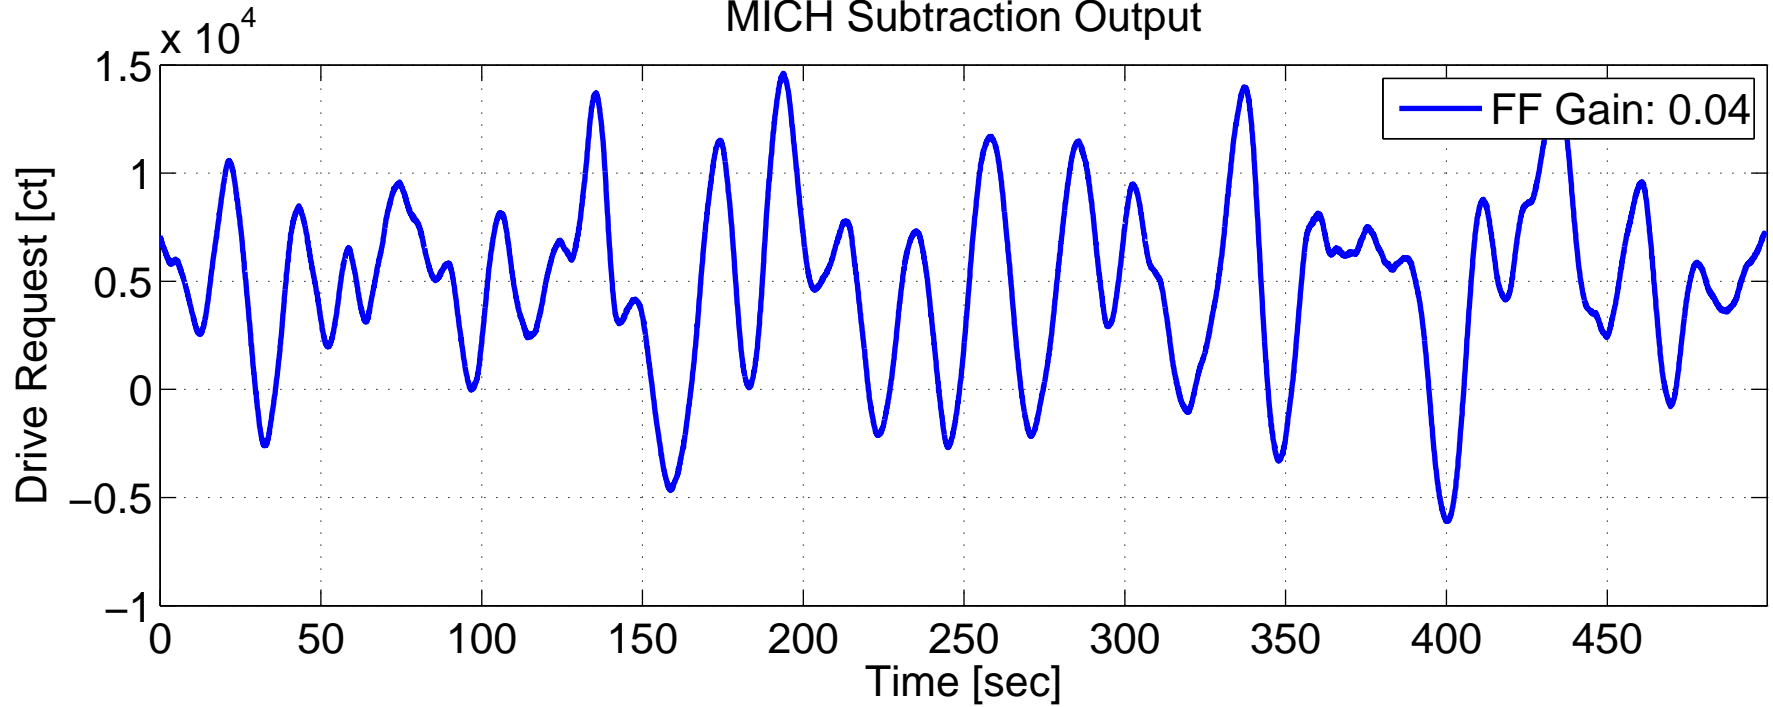

SRCL Subtraction Output

